

NOTE:
THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THESE PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U. S. PATENT NO. 286509)

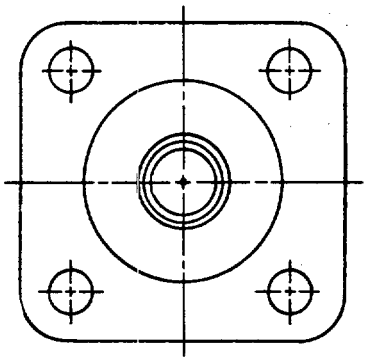

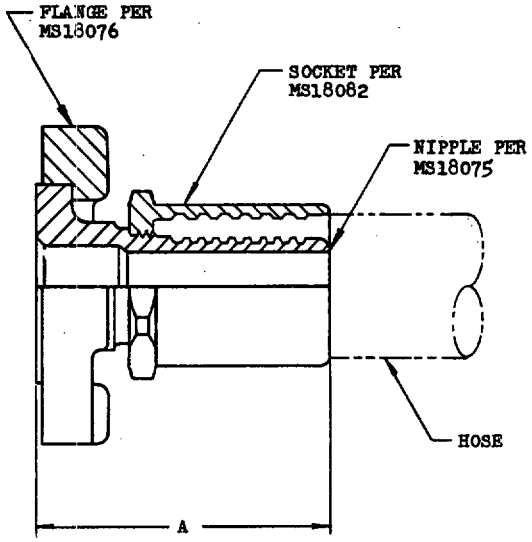

MS PART NO.	HOSE ID REF	HOSE OD REF	A
MS 18088-08	.406	.562	1.281
MS 18088-10	.500	.656	1.469
MS 18088-12	.625	.781	1.469
MS 18088-16	.875	1.109	1.469
MS 18088-20	1.125	1.359	1.750
MS 18088-24	1.375	1.672	1.812

NOTES:

1. BOLT HOLE SIZE & SPACING AS SPECIFIED ON MS18076.
2. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES; LINEAR DIMENSION, ±.010.
3. VENDOR NAME OR TRADEMARK AND MS PART NO. PERMANENTLY MARKED ON FITTING PER AS478-202.
4. THESE FITTINGS ARE TO BE ASSEMBLED AS SHOWN ON DRAWING MS18084.

APPROVED 26 April 1965 REVISED

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A.	TITLE	MILITARY STANDARD
Other Cust	FITTING END - TETRAFLUOROETHYLENE HOSE MEDIUM PRESSURE, SWIVEL FLANGE CORROSION RESISTANT STEEL	MS18088 (WP)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.