
FED. SUP CLASS
5935

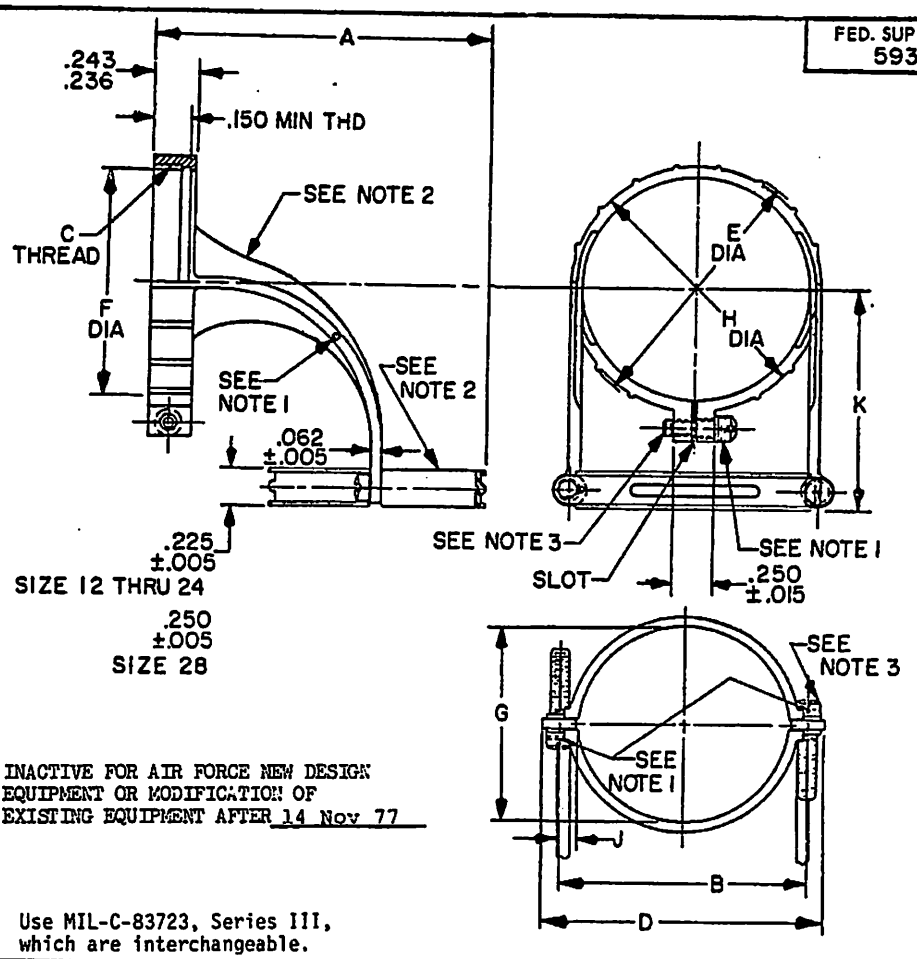

Ⓑ INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 Nov 77

Use MIL-C-83723, Series III, which are interchangeable.

Military part number	Shell size	A max.	B ±.010	C nom. -36NS-2B	D ±.015	E ±.010	F ±.010	G ±.015	H ±.015	J ±.010	K max.
MS27659-12	12	1.298	.677	.7334	.863	.788	.643	.435	.768	.094	.950
MS27659-14	14	1.388	.748	.8032	.934	.862	.717	.504	.842	.094	1.010
MS27659-16	16	1.523	.923	.9302	1.109	.989	.844	.686	.969	.115	1.070
MS27659-18	18	1.622	1.039	1.0362	1.225	1.095	.950	.794	1.075	.118	1.130
MS27659-22	22	1.878	1.298	1.2862	1.484	1.345	1.200	1.038	1.325	.126	1.260
MS27659-24	24	2.000	1.427	1.4111	1.613	1.595	1.325	1.162	1.575	.128	1.320
MS27659-28	28	2.250	1.658	1.6611	1.844	1.845	1.575	1.412	1.825	.126	1.440

NOTES:
1. .037 ±.005 DIA safety wire hole in body and screws.
2. Material: Cable clamp - passivated stainless steel.
   Clamp sector - passivated 300 series stainless steel.
3. Screw; No. 4-40 fillister head machine, stainless steel.
4. All dimensions are in inches and are after plating.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. For design feature purposes this standard takes precedence over procurement documents referenced herein.

Ⓑ DENOTES CHANGE

APPROVED 15 Nov 71 REVISED Ⓐ 12 MAR 73 Ⓑ 14 Nov 77

Reviewer activities: AF - 11, 17, 99
DLA - ES

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

P.A. AF-85	International interest	TITLE 90° SUPPORT, CABLE, ELECTRICAL CONNECTOR (FOR CLASS E AND K CONNECTORS)	MILITARY STANDARD
Other Cust			MS 27659 (USAF)
Procurement Specification MIL-C-26500		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

5935-A063-16

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:47Z
Check the source to verify that this is the current version before use.