

FED. SUP CLASS
2320

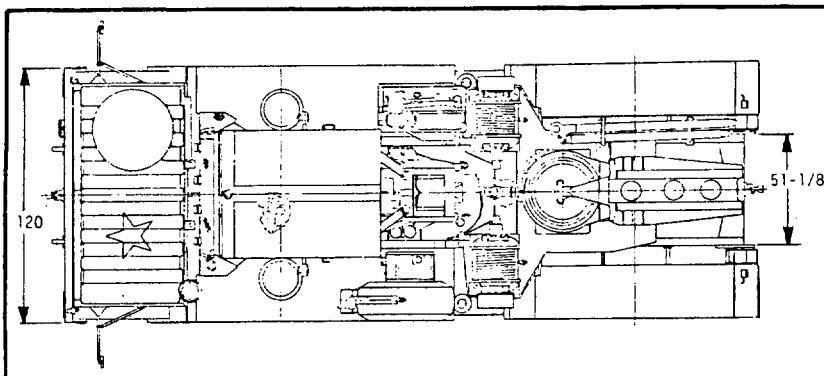

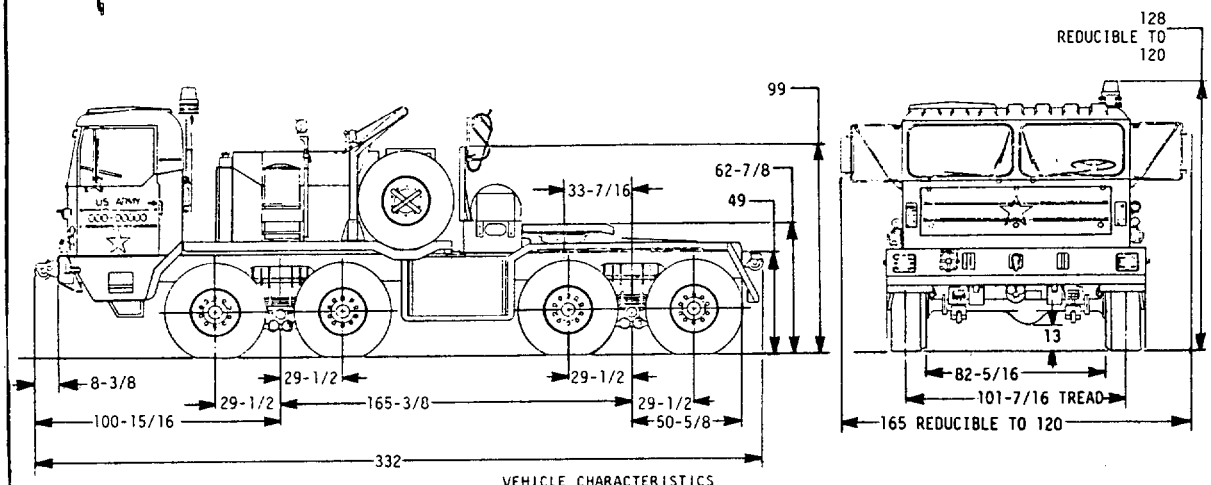

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED
LESS PAYLOAD AND CREW: (ADD 600 LBS FOR
3 MAN CREW WITH EQUIPMENT)

GROSS VEHICLE WEIGHT COMBINED W/M747
TRAILER: 83,362 LBS

PAYLOAD: LOADED
FRONT AXLE 18,650 LBS
REAR BOGIE 24,350 LBS
TOTAL 43,000 LBS

MINIMUM TURNING DIA: (WALL TO WALL) 90 FT

FORDING DEPTH: 48 IN

ENGINE: TYPE; 12 CYLINDER 2 CYCLE, LIQUID
COOLED DIESEL, CPR102142
DISPLACEMENT 852 CU IN
MAX GROSS HORSEPOWER 600 @ 2500 RPM
MAX GROSS TORQUE 1,470 @ 1600 RPM
LUBRICANT CAPACITY 40 QTS, COOLING SYSTEM
CAPACITY 124 QTS, FUEL TANK CAPACITY
140 GAL

TRANSMISSION: TYPE; POWERSHIFT W/CONVERTER,
5 FORWARD SPEEDS 1 REVERSE, ELECTRIC
SHIFT, HYDRAULIC RETARDER, LUBE CAPACITY
72 QTS

AXLES: TYPE; DOUBLE REDUCTION
CAPACITY- FRONT TANDEM 19,000 LBS CPR102114
REAR TANDEM 25,500 LBS CPR102115
TAPER LEAF WALKING BEAM SUSPENSION

BRAKES: TYPE; AIR ACTUATED, REAR FAILSAFE
FRONT 17.2 X 4 REAR 17 X 7

STEERING: TYPE; FULL POWER CPR102118

TIRES: TYPE; BIAS PLY, TUBELESS,
SIZE 18 X 22.5, 22 PLY,
INFLATION PRESSURE 60 PSI TO 90 PSI

WINCH: TYPE; SINGLE DRUM CPR102124
MAXIMUM LOAD RATING 60,000 LBS
RELIEF VALVE 35,000 LBS

ELECTRICAL SYSTEM: BASIC 24 V SYSTEM
CPR102121
BATTERIES QTY 6, EACH 300 AMP-HR

FIFTH WHEEL: CPR102912
3-1/2 IN DIA, CAPACITY 45,000 LBS

PERFORMANCE: MAXIMUM SPEED 38-1/2 MPH
MINIMUM SUSTAINED SPEED 1-1/2 MPH
SPEED ON 2-1/2% GRADE 25 MPH
SPEED ON 15% GRADE 5-1/2 MPH
MAXIMUM GRADEABILITY 37%
MAXIMUM DRAWBAR PULL 56,000 LBS
CRUISING RANGE 320 MILES

ACCESSORIES: TOWING PINTLE HOOK, TRAILER
BRAKE CONNECTION, PERSONNEL HEATER AND
UNDERWATER FORDING SYSTEM

KITS: ARCTIC CPR102132
RADIO CPR102130
AIR DEFENSE WEAPON CPR102129

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

MS PART NO.
MS52232-1
ENGINEERING DWG NO.
CPR102101
DESCRIPTION
WITH WINCH

APPROVED 26 AUG 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK: TRACTOR, 22-1/2 TON, 8×8, M746	MILITARY STANDARD MS52232(AT)
PROCUREMENT SPECIFICATION MIL-T-62147	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.