FED. SUP CLASS
5306

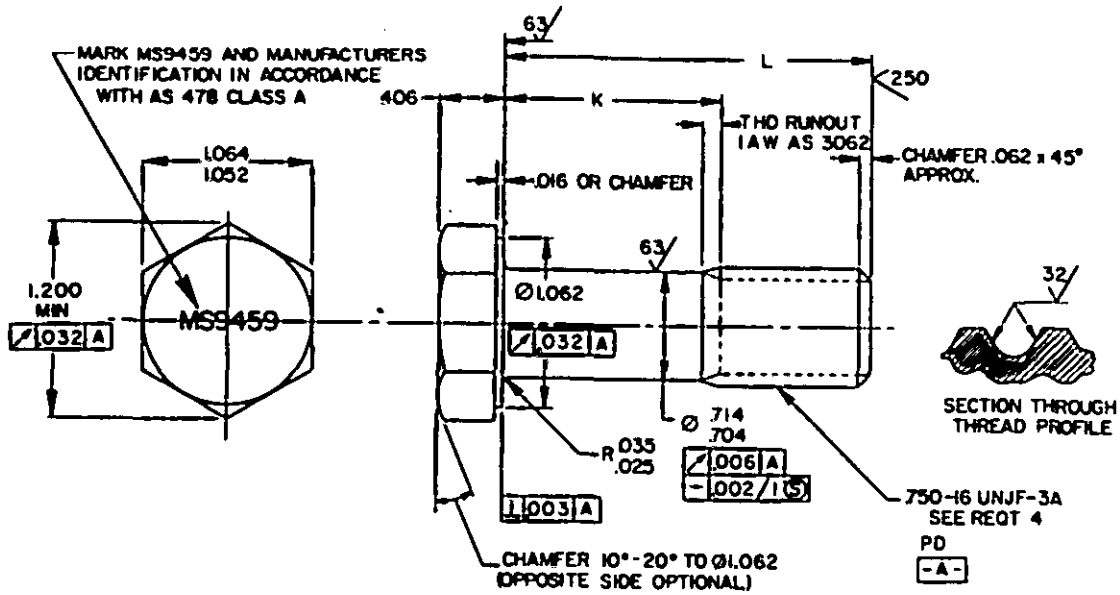


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-06	1.250	.129- .149	25.04
-07	1.312	.129- .149	25.74
-08	1.375	.129- .149	26.43
-09	1.438	.129- .149	27.13
-10	1.500	.129- .149	27.82
-11	1.562	.129- .149	28.52
-12	1.625	.129- .149	29.22
-13	1.688	.129- .149	29.91
-14	1.750	.129- .149	30.61
-15	1.812	.129- .149	31.30
-16	1.875	.129- .149	32.00
-17	1.938	.168- .188	32.69
-18	2.000	.190- .250	33.39
-19	2.125	.315- .375	34.78
-20	2.250	.440- .500	36.17
-21	2.375	.566- .625	37.56
-22	2.500	.690- .750	38.95
-23	2.625	.815- .875	40.34
-24	2.750	.940-1.000	41.73
-25	2.875	1.066-1.125	43.12
-26	3.000	1.190-1.250	44.51
-27	3.125	1.315-1.375	45.90
-28	3.200	1.440-1.500	47.29
-29	3.375	1.566-1.625	48.68
-30	3.500	1.690-1.750	50.08
-31	3.625	1.815-1.875	51.47
-32	3.750	1.940-2.000	52.86
-33	3.875	2.065-2.125	54.25
-34	4.000	2.190-2.250	55.64
-35	4.125	2.315-2.375	57.03
-36	4.250	2.440-2.500	58.42
-37	4.375	2.565-2.625	59.81
-38	4.500	2.690-2.750	61.20
-39	4.625	2.815-2.875	62.59
-40	4.750	2.940-3.000	63.98
-41	4.875	3.065-3.125	65.37
-42	5.000	3.190-3.250	66.76
-43	5.125	3.315-3.375	68.15
-44	5.250	3.440-3.500	69.54
-45	5.375	3.565-3.625	70.93
-46	5.500	3.690-3.750	72.33
-47	5.625	3.815-3.875	73.72
-48	5.750	3.940-4.000	75.11
-49	5.875	4.065-4.125	76.50
-50	6.000	4.190-4.250	77.89

(B) ENTIRE STANDARD REVISED

APPROVED 12 APR 63 REVISED (B) 31 MAR 86

P. A. NAVY - AS
Other Cust
AIR FORCE - 11

INTERNATIONAL INTEREST

TITLE
BOLT, MACHINE, HEXAGON HEAD, STEEL, .750-16 UNJF-3A

MILITARY STANDARD
MS 9459

PROCUREMENT SPECIFICATION

SUPERSEDES

PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0981

AMSC N/A

REVIEWER ACTIVITIES
AIR FORCE - 82
DLA - IS

USER ACTIVITIES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: STEEL, IN ACCORDANCE WITH AMS 6304.
2. PROTECTIVE COATING AND SURFACE TREATMENT: DIFFUSED NICKEL-CADMIUM PLATE IN ACCORDANCE WTIH AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
3. HARDNESS: RC42-46 MAXIMUM.
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.
5. MANUFACTURING: MANUFACTURING IN ACCORDANCE WITH AMS 7455-80. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION IN ACCORDANCE WITH AMS 2640-83 BEFORE PLATING.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH AS 291-64; UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
8. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478-79 CLASS A.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9459-06

- DASH NUMBER
- BASIC MS NUMBER

MS9459-06 INDICATES: BOLT, MACHINE-STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, HEXAGON HEAD, .750-16 UNJF-3A, LENGTH 1.250.

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
3. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
4. DO NOT USE UNASSIGNED PART NUMBERS.
5. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
6. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
7. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
8. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 12 APR 63 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A. NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE, HEXAGON HEAD, STEEL, .750-16 UNJF-3A	MILITARY STANDARD MS 9459
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0981

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:18Z
Check the source to verify that this is the current version before use.