FED. SUP CLASS
2530

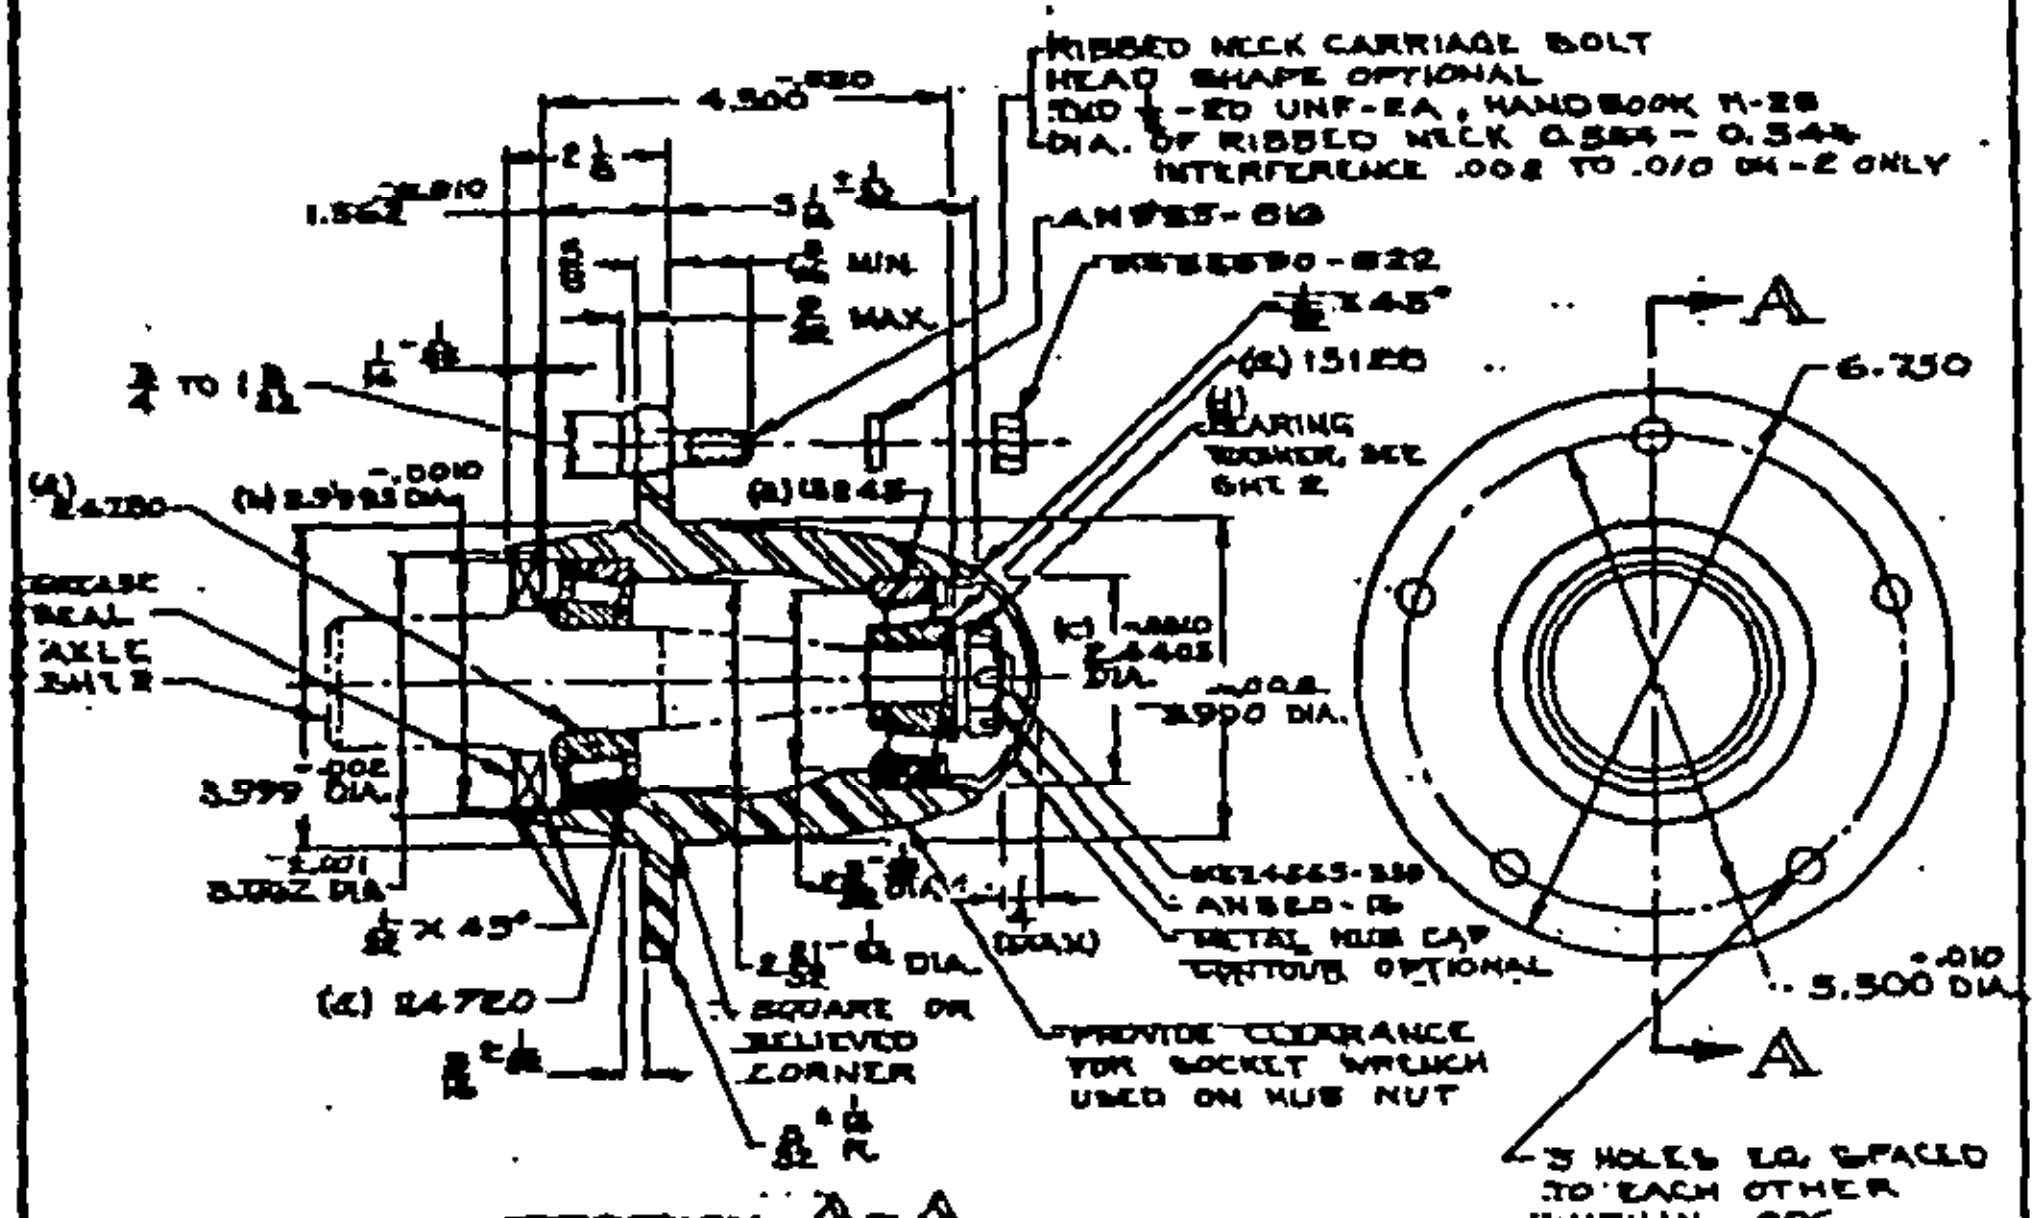

SECTION A-A

MS PART NO	WHEEL SIZE (REFERENCE)	MATERIAL
MS24328-1	6.00-9 7.50-10 OR 9.00-10	CAST OR FABRICATED STEEL OR CAST OR MALLEABLE IRON
MS24328-2	6.00-9 OR 7.50-10	ALUMINUM ALLOY

NOTES

(a) TIMKEN ROLLER BEARING CO PART NO DENOTED OR EQUAL.

(b) DIMENSION SHOWN IS FOR STEEL OR CAST IRON HUB. FOR ALUMINUM ALLOY USE 2.9965. $^{+.0000}_{-.0010}$

(c) DIMENSION SHOWN IS FOR STEEL OR CAST IRON HUB. FOR ALUMINUM ALLOY USE 2.4395. $^{+.0000}_{-.0010}$

(d) STEEL BEARING WASHER.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 0.010 FOR DECIMALS AND ± 1/64 FOR FRACTIONS.

HUB SHALL FIT WHEELS MS24325 AND MS24326. SEE MS24322.

THE AXLE SHOWN ON SHEET 2 IS FOR REFERENCE PURPOSES ONLY AND IS NOT TO BE USED AS A STANDARD PART.

ENTIRE STANDARD REVISED

APPROVED 12 JUN 1956 REVISED (B) 20 OCT 1984

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications shall be made from this document.

Reviewer:
Army-MD,
Navy-YD,WD
Air Force-84,85

User:
Army-GL
Navy-MC

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

P.A. AF-84 Other Cust MD.	TITLE HUB-CANTILEVER MOUNTING FOR 6.00-9, 7.50-10 & 9.00-10 WHEELS	MILITARY STANDARD MS24328
PROCUREMENT SPECIFICATION MIL-W-8005	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

User:
Army-GL
Navy-MC

Reviewer:
Army-MO,
Navy-YD,WD
Air Force-84,85

[illegible]

FED. SUP CLASS
2530

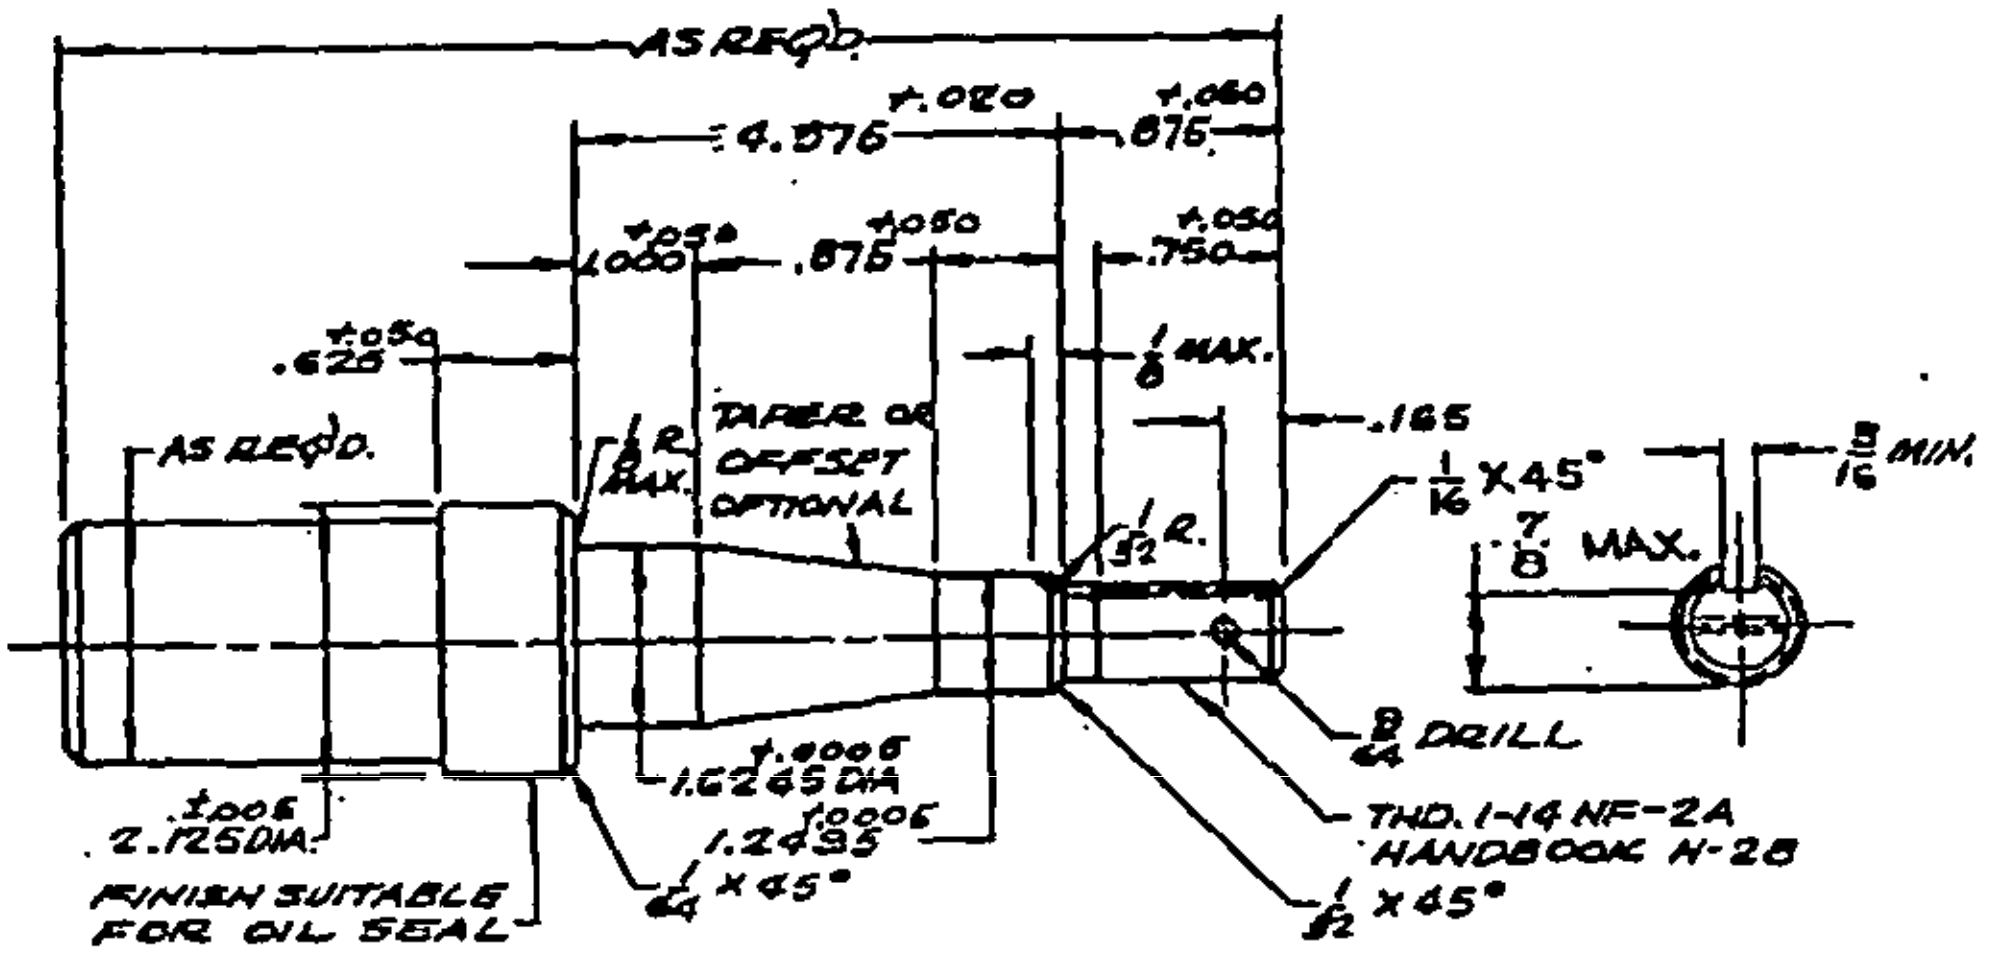

AXLE

GRIND BEARING SURFACES
BACK-UP RING ON SHAFT OPTIONAL

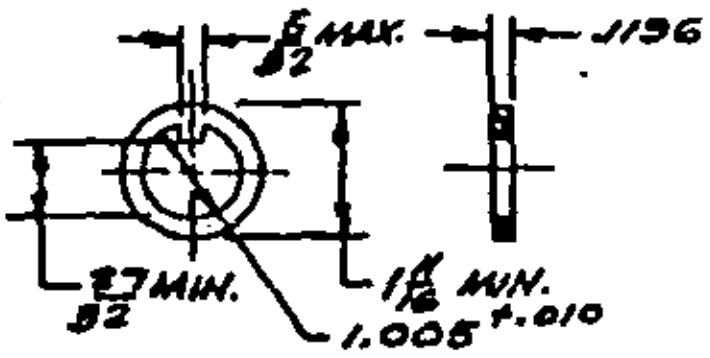

WASHER

THIS DRAWING IS FOR REFERENCE PURPOSES ONLY

APPROVED 12 JUN 1956 REVISED 20 OCT 1964

ENTIRE STANDARD REVISED

P.A. AF-84
Other Cust NO
Procurement Specification
MIL-W-5005

TITLE
HUB-CANTILEVER MOUNTING FOR 6.00-9, 7.50-10 & 9.00-10 WHEELS

SUPERSEDES:

MILITARY STANDARD
MS24328
SHEET 2 OF 2

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.