
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities:
DSC-CS

Review activities:
Army - MI

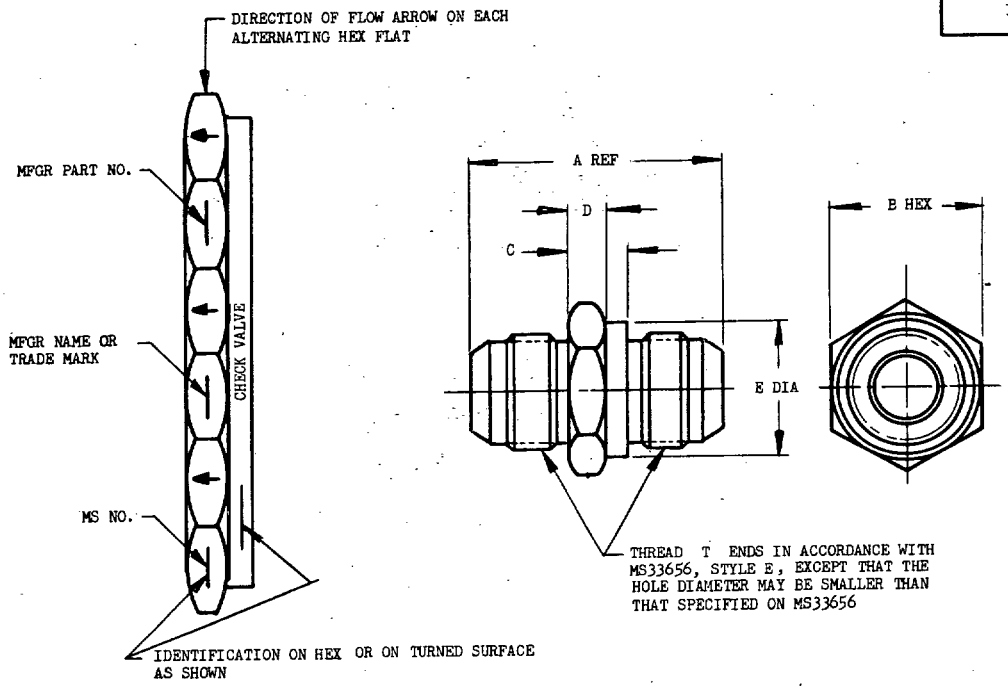

DEVELOPMENT OF HEX

DASH NO.	TUBE OD	(a) THREAD T	A	(a) B HEX		C	D	E DIA	(b) RATED FLOW GPM	WEIGHT LB APPROX
-4	1/4	7/16-20 UNF-3A	1.538	.688		.438	.219	.678	1.2	.070
-5	5/16	1/2 -20 UNF-3A		.750				.740	2.3	.078
-6	3/8	9/16-18 UNF-3A	1.581	.813	+.003 -.004	.469	.250	.803	3.5	.104
-8	1/2	3/4 -16 UNF-3A	1.814	1.000		.500	.281	.990	6.0	.183
-10	5/8	7/8 -14 UNF-3A	2.047	1.125		.531	.312	1.115	10.5	.234
-12	3/4	1-1/16-12 UN -3A	2.290	1.375		.562	.343	1.365	16.0	.352
-16	1	1-5/16-12 UN -3A	2.884	1.625	±.016	1.062	.375	1.615	29.0	.580

MATERIAL: SEE PROCUREMENT SPECIFICATION.
(b) BASED ON FLOW AT 0°F.

BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.

(D) INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD. 17/15 DELETED.

Reclaimed materials. The use of reclaimed materials shall be encouraged to the maximum extent possible.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 4 Jan 60 | REVISED (A) 12 Jan 62 (B) 13 May 68 (C) 22 Sep 1978 (D) 14 Feb 86

P.A. USAF -71	OTHER INT.	TITLE	MILITARY STANDARD
Other Cust Army -AV (D) Navy -AS AIR FORCE - 99	INTERNATIONAL	VALVE, CHECK, MINIATURE HYDRAULIC, AIRCRAFT AND MISSILE, -65° F TO +450° F, 3,000 PSI, FLARED TUBE	MS24593
PROCUREMENT SPECIFICATION MIL-V-25675	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 1650-0341

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.