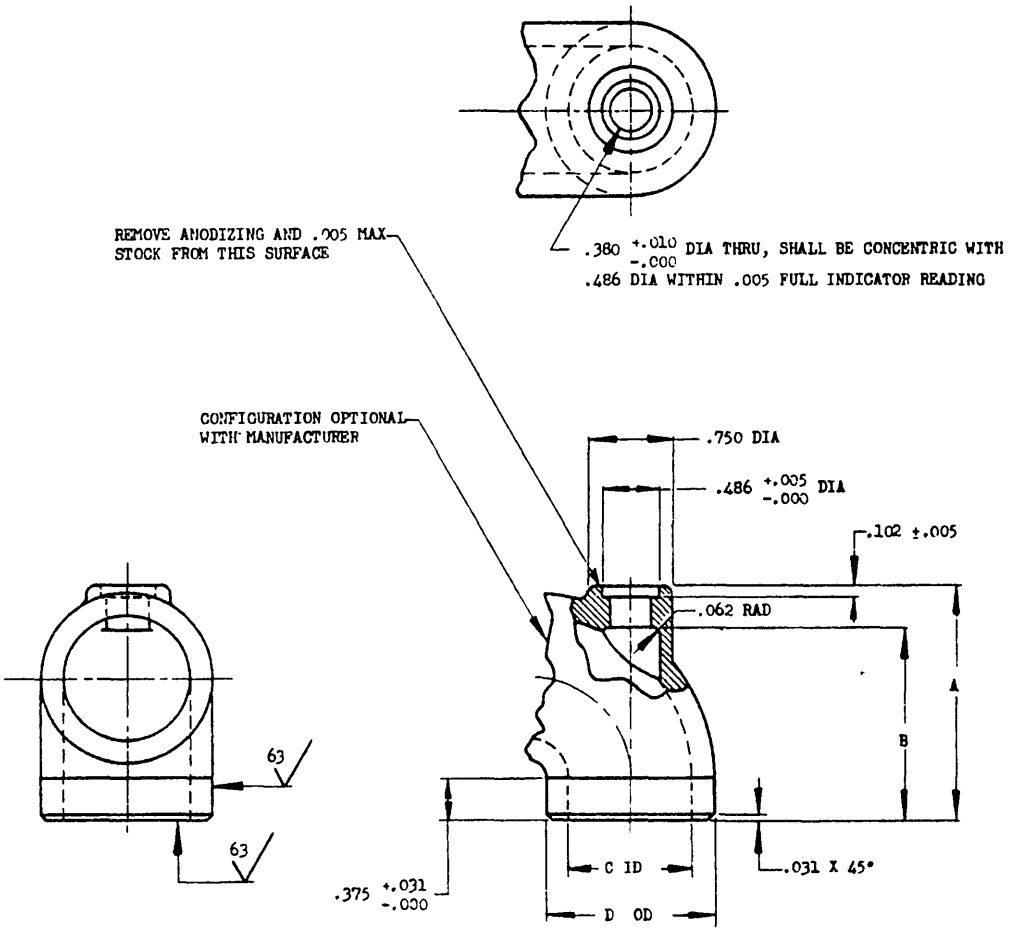



| MS DASH NO. PORT SIZE AND TUBE SIZE | TUBING OD REF | A | B | C DIA | D +.000 -.005 DIA |
|---|---|---|---|---|---|
| -1-8 | .500 | 1.375 | 1.000 | .500 | .745 |
| -2-16 | 1.000 | 1.969 | 1.594 | 1.188 | 1.495 |
| -2-20 | 1.250 | 2.344 | 1.969 | | |
| -2-24 | 1.500 | 2.719 | 2.344 | | |
| -2-32 | 2.000 | 2.969 | 2.594 | | |
| -3-24 | 1.500 | 2.719 | 2.344 | 1.547 | 1.870 |
| -3-32 | 2.000 | 2.969 | 2.594 | | |
| -4-40 | 2.500 | 3.281 | 2.906 | 1.875 | 2.245 |
| -4-48 | 3.000 | 3.562 | 3.188 | | |
| | | | | | |

MATERIAL: ALUMINUM ALLOY, SPEC QQ-A-596, COMP. NO. 8.

FINISH: RED ANODIC FILM, SPEC MIL-A-8625.

FOR SURFACE ROUGHNESS, SEE STANDARD MIL-STD-10.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: CASTINGS ±.031, DECIMALS ±.010, ANGLES ±0°30'.

THIS IS A DESIGN STANDARD NOT USED AS A PART NUMBER

APPROVED 22 Jun 54 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

| CUSTODIANS | OTHER INT. | MILITARY STANDARD | MS33552 (ASG) |
|---|---|---|---|
| Navy - Buaer<br>Air Force | A -<br>N -<br>AF - | FITTING, VARIABLE CONFIGURATION, LOW PRESSURE, EXTERNAL OUTLET, BOOSTER PUMP | |
| PROCUREMENT SPECIFICATION | | SUPERSEDES: | SHEET 1 OF 1 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.