
MS9380 (ASG)

FED SUP CLASS 5340

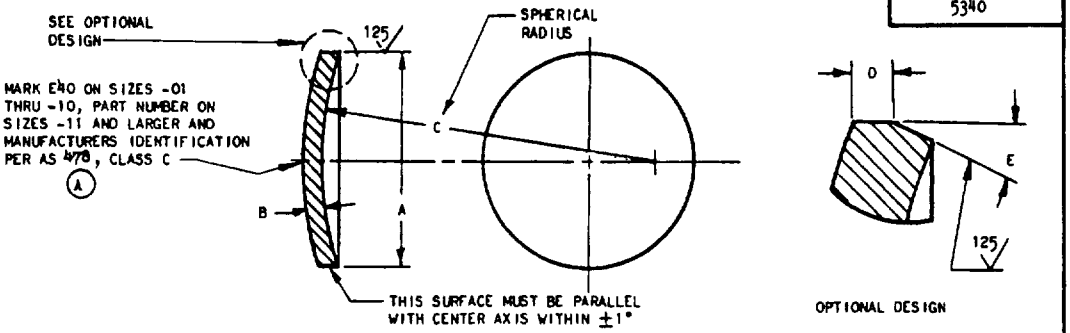

PART NUMBER	NOMINAL SIZE	A DIA	B ± 005	C ±.016	D ±.010	E ±1°	APPROX WT LB/100
MS9380-01	188	186- 189	025	172	—	32	.01
MS9380-02	.250	248-.252	032	219	—	32	.02
MS9380-03	312	310- 315	063	266	033	32	05
MS9380-04	375	372- 377	063	406	.033	25	07
MS9380-05	438	435- 440	063	469	033	25	10
MS9380-06	500	497- 502	.063	531	033	25	13
MS9380-07	562	560- 565	063	625	033	25	15
MS9380-08	625	622- 628	063	750	.033	23	19
MS9380-09	.688	684- 690	063	875	033	23	23
MS9380-10	.750	747- 753	063	938	033	23	.28
MS9380-11	812	809-.815	063	1 031	033	23	34
MS9380-12	875	872- 878	080	1 094	042	23	48
MS9380-13	938	934- 940	080	1 156	042	24	55
MS9380-14	1 000	997-1 003	080	1 188	042	24	63
MS9380-15	1 031	1 028-1 034	080	1 250	042	24	68
MS9380-16	1 062	1 059-1 065	080	1 250	042	24	.72
MS9380-17	1 125	1.122-1 128	080	1 375	042	24	80
MS9380-18	1 188	1 184-1 190	080	1 500	042	24	89
MS9380-19	1.250	1 247-1 253	080	1 625	042	21	98
MS9380-20	1 312	1 307-1 317	.080	1 750	042	21	1 08
MS9380-21	1 375	1 370-1 380	080	1.812	042	21	1 19
MS9380-22	1 438	1 432-1 442	080	2 000	042	21	1.30
MS9380-23	1 500	1 495-1 505	080	2 125	042	21	1 37
MS9380-24	1 562	1 558-1 568	080	2 250	042	21	1 54
MS9380-25	1 625	1 620-1 630	080	2 375	042	21	1.66
MS9380-26	1 688	1 683-1 693	080	2 500	042	13	1 79
MS9380-27	1 750	1 745-1 755	080	2 688	042	19	1 93
MS9380-28	1.812	1 807-1 817	080	2 750	042	19	2.06
MS9380-29	1 875	1 870-1 880	080	2 875	042	19	2 21
MS9380-30	1 938	1 932-1 942	080	3 094	042	19	2 36
MS9380-31	2 000	1 995-2 005	080	3 188	042	19	2 54
MS9380-32	2.062	2.057-2 067	080	3.188	.042	19	2.67
MS9380-33	2 125	2 120-2 130	080	3 250	042	19	2.84
MS9380-34	2.250	2 245-2 255	.080	3.562	042	19	3.18
MS9380-35	2.375	2 370-2 380	080	3 875	042	19	3.54
MS9380-36	2 500	2.495-2.505	080	4.156	.042	17	3 92
MS9380-37	2.625	2 620-2 630	080	4 250	042	17	4 33
MS9380-38	2 750	2 745-2 755	080	4 500	042	17	4 74
MS9380-39	2 875	2 870-2 880	080	4 750	042	17	5 17
MS9380-40	3.000	2.995-3 005	080	5.000	042	17	5 64
MS9380-41	3.188	3 182-3 192	080	5 500	042	17	6 35
MS9380-42	3 250	3 245-3 255	.140	5 500	067	17	10 60
MS9380-43	3.500	3 495-3 505	.140	6.000	067	17	12 34
MS9380-44	3.750	3 745-3 755	.140	6.000	067	17	14 18

1. MATERIAL ALUMINUM AMS 4003
2. MATERIAL CODE E40 PER AS 869
3. FINISH ANODIZE AMS 2470
4. SURFACE ROUGHNESS AS 291
5. REMOVE BURRS AND SHARP EDGES
6. DIMENSIONS IN INCHES
7. DO NOT USE UNASSIGNED PART NUMBERS

AMS AND AS ARE SAE PUBLICATIONS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

Review activities: USAF - 11 Navy - AS

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

APPROVED 2 Feb 62 REVISED (A) 19 Dec 66

PA USAF - 11 Other Cust Navy - AS	TITLE PLUG, EXPANSION-AMS 4003	MILITARY STANDARD MS 9380 (ASG)
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT E25-90-3

*U.S. GOVERNMENT PRINTING OFFICE 1967-251-845/3570

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.