MIL-R-22097/6E
16 February 1972
SUPERSEDING
MIL-R-22097/6D
30 September 1971

MILITARY SPECIFICATION

RESISTORS, VARIABLE, NONWIRE-WOUND,

(ADJUSTMENT TYPE, SINGLE TURN),

STYLE RJ50

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for style RJ50, adjustment type, single turn, nonwire-wound, variable resistors. This style is available in characteristics C and F.

2. APPLICABLE DOCUMENTS

2.1 The following document of the issue in effect on date of invitation for bids or request for proposal forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-22097 - Resistors, Variable, Nonwire-Wound (Adjustment Type), General Specification for.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-22097, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions shown on figure.

3.3 Power rating. The power rating shall be 1/4 watt.

3.4 Actual effective electrical travel. The actual effective electrical travel shall be 215° minimum.

3.5 Nominal resistance value and maximum rated ac or dc working voltages. Nominal resistance values and maximum rated ac or dc working voltages are as specified in table I.


3.6 Torque.

3.6.1 Operating. The operating torque shall be a maximum of 2.0 ounce-inches.

3.6.2 Stop. The stop shall withstand a force of 4 ounce-inches when this amount of torque is applied through the operating shaft to the stop.

3.7 Terminals. Available in P-type terminal only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:10Z
Check the source to verify that this is the current version before use.

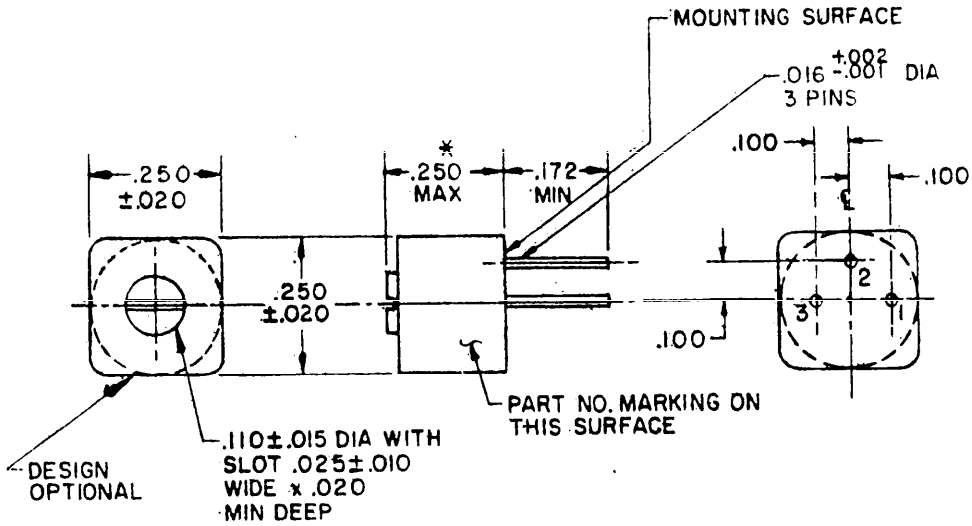

TERMINAL TYPE P

INCHES	MM
.001	.03
.002	.05
.010	.25
.015	.38
.016	.41
.020	.51
.025	.64
.100	2.54
.110	2.79
.172	4.37
.250	6.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).
4. Nominal mounting means is by the use of pins only.
5. The picturization of the style above is given as representative of the envelope of the item. Slight deviations from the outline shown which are contained within the envelope, and do not alter the functional aspects of the device are acceptable.
6. The head of the actuating screw may or may not be flush with or recessed in the body.

FIGURE 1. Style RJ50 resistors.

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:10Z
Check the source to verify that this is the current version before use.

TABLE I. Nominal resistance value and maximum rated ac or dc working voltage.

Nominal resistance value	Maximum rated ac or dc working voltage
Ohms	Volts
10	1.58
20	2.23
50	3.54
100	5.0
200	7.07
500	11.1
1,000	15.8
2,000	22.3
5,000	35.4
10,000	50.0
20,000	70.7
25,000	79.0
50,000	111
Megohms	
0.10	158
0.25	200
0.50	200
1.00	200

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-R-22097, and as specified herein.

4.2 Dielectric withstanding voltage. In the dielectric withstanding voltage test, the applied potential shall be 600 volts rms at atmospheric pressure, and 250 volts rms at reduced barometric pressure.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-R-22097.

6. NOTES

6.1 Notes. The notes specified in MIL-R-22097 are applicable to this specification.

6.2 Supersession data. MIL-R-22097/6A, characteristic B has been deleted. Resistors previously identified under characteristic B shall be substituted by resistors of characteristic C.

6.3 Weight. The maximum weight is .001323 pound (0.6 gram).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:10Z
Check the source to verify that this is the current version before use.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, MU
Navy - EC, AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5905-0794)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:10Z
Check the source to verify that this is the current version before use.

be helpful, but is not mandatory.)

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

PADC (RCPC)
GRIFFISS AFB NY 13440

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 20261019111:10Z
Check the source to verify that this is the current version before use.