FED. SUP CLASS
4720

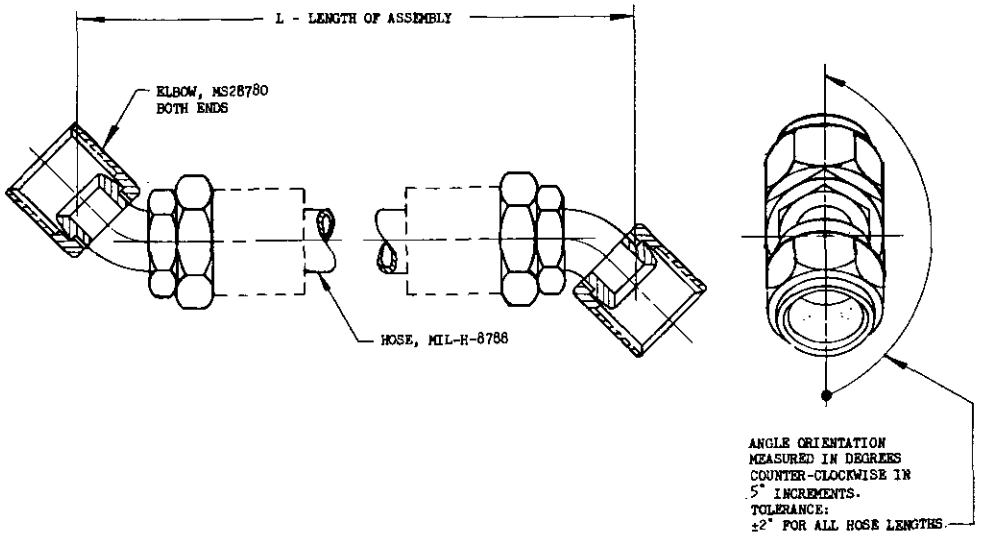

DASH NO.	SIZE CODE LETTER	TUBING OD REF	HOSE ID REF	END FITTINGS PART NO.
-4	E	1/4	7/32	MS28780-4
-5	F	5/16	9/32	MS28780-5
-6	G	3/8	11/32	MS28780-6
-8	H	1/2	7/16	MS28780-8
-10	J	5/8	9/16	MS28780-10
-12	K	3/4	11/16	MS28780-12
-16	M	1	7/8	MS28780-16

(A) HOSE ASSEMBLY TO BE SPECIFIED IN INCHES IN THE FOLLOWING LENGTH INCREMENTS ONLY:
UNDER 12 INCHES LONG, INCREMENTS OF 1/8 INCH (TOLERANCE ± 1/8)
12 TO 18 INCHES LONG, INCREMENTS OF 1/4 INCH (TOLERANCE ± 1/8)
OVER 18 INCHES LONG, INCREMENTS OF 1/2 INCH (TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4), (TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2), (TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%)

THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE BASE ASSEMBLY NUMBER, SIZE, LENGTH AND ANGLE.

EXAMPLE OF PART NUMBER:

MS28922J018A03
- A — ANGLE BETWEEN ELBOWS IN DEGREES = 15° + 5° = 03
- 18 — LENGTH IN EIGHTHS OF AN INCH
- LENGTH IN INCHES
- J — DESIGNATION FOR -10 HOSE SIZE

DIMENSIONS IN INCHES.

(B) CANCELLED AFTER 18 May 1982, NO SUPERSEDING STANDARD.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 17 Jul 62 REVISED (A) 31 Mar 69 (B) 18 May 1982

Review activities: USAF - 82 Navy - AS

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 82 Other Cust Navy - AS	TITLE (A) HOSE ASSEMBLY RUBBER, HYDRAULIC, (3,000 PSI), ELBOW 45° TO ELBOW 45°, FLARED TUBE	MILITARY STANDARD MS28922(ASG)
PROCUREMENT SPECIFICATION MIL-H-8790	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5930

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:00Z
Check the source to verify that this is the current version before use.