SPECIFICATION

CORROSION RESISTANT SPLIT KEYS, BUOY SHACKLE

1. SCOPE

1.1 Scope - This specification covers corrosion resistant split keys for use in buoy mooring shackle pins.

1.2 Classification - Split keys shall be of the following classes:

1st, 2nd and 3rd class
4th class
Special

2. APPLICABLE DOCUMENTS

2.1 The following Military and Federal Specifications and Standards of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-S-766C Steel Plates, Sheets and Strip-Corrosion Resisting.

STANDARD

Military

MIL-STD-129E Marking for Shipment and Storage

Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

3. REQUIREMENTS

3.1 Material - The split keys shall be made from plate or strip of class 304 corrosion resisting steel conforming to Federal Specification QQ-S-766C as applicable.

3.2 Design and Dimensions - Split keys shall conform in design and dimensions to Figure 1 and Table 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:06Z
Check the source to verify that this is the current version before use.

	1st, 2nd, & 3rd CLASS	4th CLASS	SPECIAL
R	3/16	1/8	1/4
S	9/16	9/16	9/16
T	15/16	13/16	1 1/16
U	1 1/4	7/8	1 1/4
V	3/8	3/8	3/8
W	3/8	1/4	1/2
X	4	4	4 1/2

TABLE I - SPLIT KEY DIMENSIONS (INCHES)

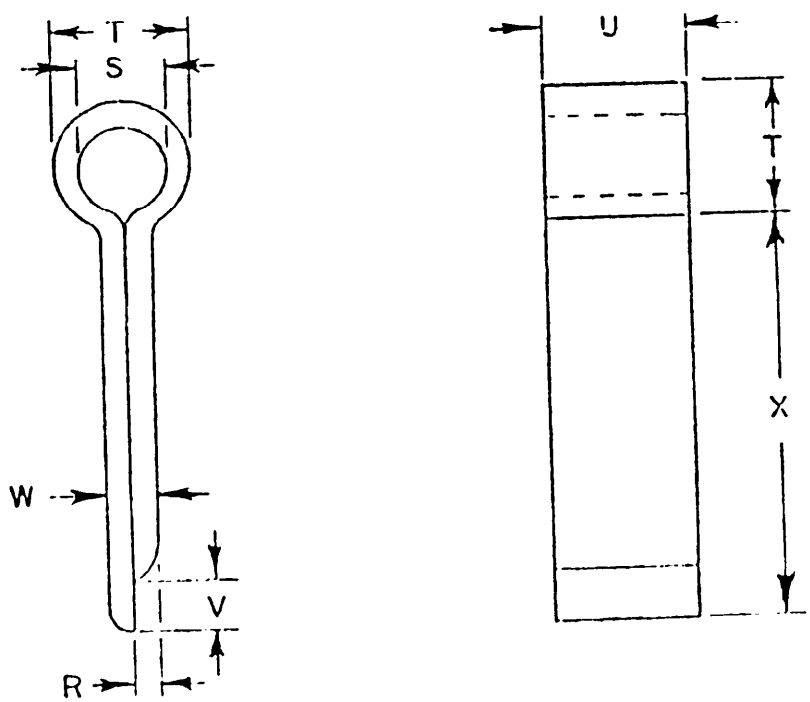


FIGURE 1 SPLIT KEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:06Z
Check the source to verify that this is the current version before use.

3.2.1 Dimension Tolerance - Dimension tolerances shall be as follows:

Figure 1, bars used to make split keys: Variation of .01 inch on thickness and .06 inch oversize on width.

3.3 Workmanship - All keys shall be free of flaws, seams, cracks, and other defects which may affect their serviceability and handling.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirement.

4.2 Lot - For the purpose of inspection and testing a lot shall consist of all items of the same type, class and style offered for acceptance at the same time.

4.3 Sampling - Samples for inspection of split keys shall be selected from each lot in accordance with Table 2.

NO. OF KEYS IN LOT	NO. OF SAMPLES	ACCEPTANCE NO.
UP TO 500	20	1
500-800	25	2
800-1300	35	2
1300-3200	50	4
3200-8000	75	6
8000-25000	100	8

TABLE 2 SPLIT KEY SAMPLING

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:06Z
Check the source to verify that this is the current version before use.

4.4 Inspection - Samples selected in accordance with 4.3 shall be inspected by the government inspector to determine conformance with 3.2 of this specification.

4.5 Rejections - If the cumulative number of defective samples is equal to or less than the acceptance number shown in Table 2, the lot may be accepted. If the number of defective samples exceeds the acceptance number, a second set of samples shall be selected, in an amount doubling that taken originally, and the acceptance number shall also be doubled. If the number of defective samples exceeds the second acceptance number, the lot shall be rejected.

4.6 Inspection of Preparation for Delivery - The packing and marking of the equipment shall be inspected to determine conformance with the applicable requirements of section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 The keys shall be packed in a manner that will insure arrival at destination in satisfactory condition and be acceptable to the carrier at lowest rates. Split keys shall be packaged in bundles of ten (10).

5.2 Marking - In addition to any special markings required by the contractor or order, unit packages and shipping containers shall be marked in accordance with the requirements of Standard MIL-STD-129E.

6. NOTES

6.1 Intended Use - Keys covered by this specification are intended for use on moorings for navigational buoys.

6.2 Ordering Data - Procurement documents should state the following:

(a) Title, number and date of this specification
(b) Class desired
(c) Quantity desired
(d) Federal stock numbers

Preparing Activity:
U.S. COAST GUARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:06Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS

U.S.MAIL

Commandant (FSI-1/71)
U. S. Coast Guard Headquarters
400 Seventh Street, S. W.,
Washington, D. C. 20591

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:06Z
Check the source to verify that this is the current version before use.