INCH-POUND

A-A-55189
25 MARCH 1993

COMMERCIAL ITEM DESCRIPTION

SKIRT, MATERNITY

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-29376.

ABSTRACT

Abstract. The skirt shall be one type of olive green polyester wool maternity skirt intended for wear by female personnel of the US Marine Corps.

Classification. The skirt shall be provided in the following sizes:

| | |
|---|---|
| EXTRA-SMALL | (4-6) |
| SMALL | (8-10) |
| MEDIUM | (12-14) |
| LARGE | (16-18) |

NOTE: The sizes (EXTRA-SMALL, SMALL, MEDIUM, LARGE), may be abbreviated as XSM, SM, MED and LG.

SALIENT CHARACTERISTICS

General description. The skirt shall consist of a three piece skirt and a full elastic waistband, which has a one piece front with a knitted nylon cloth stretch panel inserted across the upper front and a two piece back with waist darts. The skirt shall be unhemmed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Material.
Basic cloth. The cloth for the basic material shall be a serge, polyester/wool, Green Shade 2243, two up and two down right hand twill, conforming to the following:

| Characteristic | Requirement | Test Method |
|---|---|---|
| Fiber Content | | ASTM-D 629 |
| % Polyester | 77% to 83% | |
| % Wool (minimum) | 17% | |
| pH Value | 5.5 to 8.5 | ASTM-D 2165 |
| Weight (linear yards, based on 56 inch width basis) | 10.5 to 11.0 | ASTM-D 3776 (Option C) |
| Yarns Per Inch (minimum) | | ASTM-D 3775 |
| Warp | 65 | |
| Filling | 55 | |
| Breaking Strength (Grab Method) (pounds, minimum) | | ASTM-D 5034 |
| Warp | 160 | |
| Filling | 140 | |
| Tearing Strength (pounds, minimum) | | ASTM-D 1424 |
| Warp | 6.0 | |
| Filling | 6.0 | |
| Dimensional Stability (maximum) | | AATCC 135 |
| Warp | 2.5% | |
| Filling | 2.5% | |
| Colorfastness to: (minimum) | | |
| Light | Class 4 | AATCC 16, 16A |
| Wet-dry cleaning | Class 4 | AATCC 132 |
| Perspiration | Class 4 | AATCC 15 |
| Crocking | Grade 3 | AATCC 8 |

Knitted cloth. The cloth for the front stretch panel shall be a interlock knitted, tubular, stretch type nylon cloth conforming to Green Shade 2245. The cloth shall weigh 6.5 to 8.0 ounces per square yard when tested according to test method ASTM-D 3776, (Option C), and have a minimum of 30 wale yarns per inch and 35 courses per inch when tested according to test method ASTM-D 3887.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-Rol XL 90 or equal and shall be 1 ± 1/16 inches in width.

Finishing tape. The tape for finishing the bottom of the skirt shall be a rayon, textile, flat weave tape, having a width of either 1/2 ± 1/16 inch; 9/16 ± 1/32 inch; 1-1/8 ± 1/32 inch; or 1-1/4 ± 1/32 inch. The weave shall be plain, 1 up and 1 down, except for the 1-1/4 inch tape which can also be a 2 up and 2 down herringbone twill weave, with one reversal of twill in the center of the tape. The color of the tape shall closely match Olive Drab, Shade T-1, Cable No. 66023 of DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

Thread. The thread for stitching seams shall be a 3 ply, Size 50, soft finish machine thread cotton, averaging 11,023 to 12,400 yards per pound when tested as specified according to test method ASTM-D 1907. The thread for overedge stitching shall be a 3 ply, Size 70, soft finish machine thread cotton, averaging 14,173 to 16,535 yards per pound when tested as specified according to test method ASTM-D 1907. The color of the thread shall be Olive Drab, Shade T-1, Cable No. 66023, of DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968.

Finished measurements. The finished skirts shall conform to the following - All measurements and tolerances are expressed in inches:

| Size | (A) Waist Relaxed | (B) Waist Stretched | (C) Hips | (D) Length | (A-A) Waistband |
|---|---|---|---|---|---|
| EXTRA-SMALL | 24 | 29 | 39 | 29-1/2 | 1-1/4 |
| SMALL | 25 | 31 | 41 | 30 | 1-1-4 |
| MEDIUM | 26 | 34 | 44 | 30-1/2 | 1-1/4 |
| LARGE | 27 | 37-1/2 | 47-1/2 | 31 | 1-1/4 |
| TOLERANCE | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/8 |

NOTE: All measurements shall be taken with skirt smooth and flat. A, B, C and D refer to locations on Figure 1.

(A-B) Waist - Twice the measurement taken in center of waistband from folded edge to folded edge.

(C) Hips - Twice the measurement taken on the skirt 7 inches down from top edge of waistband from folded edge to folded edge.

(D) Length - Measurement taken at center back from top edge of waistband to bottom edge of unhemmed skirt.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Label/marking. A commercial type white non-woven material label shall be used. The basic cloth shall consist of either spunbonded polyester made from 4.0 denier (.44 Tex) continuous filament white polyester fiber or 80/20 polyester/cellulose material, impregnated and coated with a permanent pigmented acrylic or nitrocellulose composition affixed by an appropriate acrylic or nitrocellulose resin. The label shall show a minimum of Class 4 - Colorfastness to Accelerated Laundering Transference (Wool), when tested as specified according to test method AATCC 61, Test 1A. The inscription shall be as follows:

SKIRT, WOMEN'S MATERNITY
FIBER CONTENT: Polyester (80%) and Wool (20%) (EXAMPLE)
SIZE: SMALL (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)
CONTRACT NO.: DOT-CG-00000-0 (EXAMPLE)
NAME OF CONTRACTOR:
MACHINE WASH: WARM. LINE OR TUMBLE DRY. IF TOUCH-UP IS DESIRED, USE COOL IRON. WASH DARKS SEPARATELY. DO NOT BLEACH.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 3 inches for hemming the bottom of the skirt and a 5/8 inch seam allowance for all seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Workmanship. After completion, the finished skirt shall be thoroughly cleaned, and all loose thread, lint, and foreign matter removed. The entire skirt shall be pressed smooth with heated pressing iron or pressing machine. Press marks and gloss shall be removed.

Product demonstration model. When required, offerors shall submit samples of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerors are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor Quality Assurance systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Visual examination. Sampling and examination of the end item shall be performed for dress (d) skirts in accordance with the provisions of MIL-STD-1609 - Provisions For Evaluating Quality Of Women's Skirts.

Dimensional Examination. The dimensional examination provisions for the finished skirts shall be as listed in the Finished measurements paragraph contained in this Commercial Item Description and as specified in MIL-STD-1609 - Provisions For Evaluating Quality Of Women's Skirts.

Packaging Examination. The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1609 - Provisions For Evaluating Quality Of Women's Skirts.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

PACKAGING

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

NOTES

Standard sample. For information and access regarding the availability of standard samples of shades specified, address inquiry to the procuring activity issuing the invitation for bids.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Source of Government documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Copies of Department of Defense (DoD)
Standard Color Card of
Official Standardized Shades for Sewing Threads, 1968
- Application for copies should be addressed to:

Color Association of the United States, Incorporated
343 Lexington Avenue
New York, NY 10016-0927

Sources of Non-government documents.

ASTM Test Methods - Application for copies should be addressed to:

American Society for Testing and Materials
1916 Race Street
Philadelphia, PA 19103-1187

AATCC Test Methods - Application for copies should be addressed to:

American Association of Textile Chemists and Colorists
P.O. Box 12215
Triangle Park, NC 27709-2215

Review Activity:
NAVY-MC

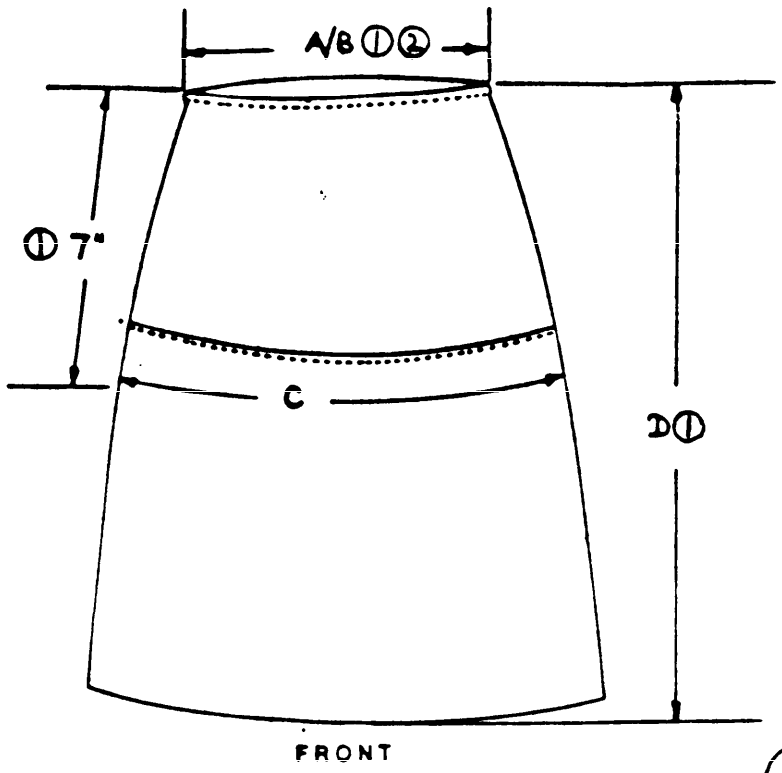
Civil Agency Coordinating Activity:
GSA-FSS

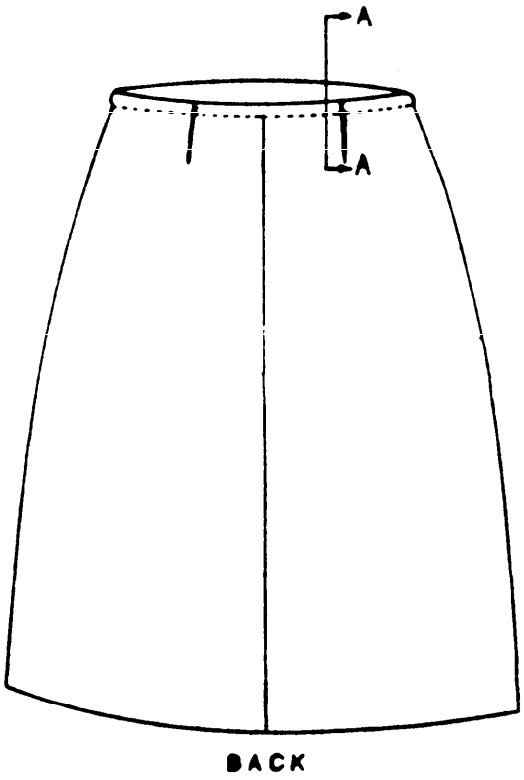
Preparing Activity:
DLA-CT

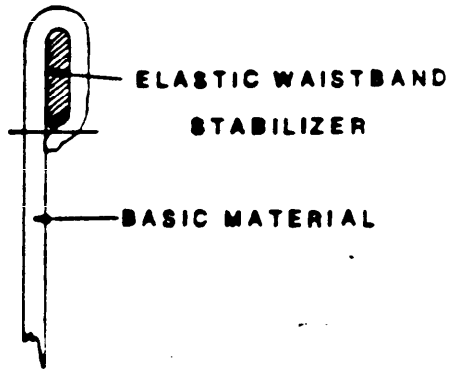
Project No.
8410-0815



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.




WAISTBAND SECTION A-A

NOTES ① SEE FINISHED MEASUREMENTS Para.

② DIM. A-RELAXED

DIM. B-STRETCHED

FIGURE 1.-SKIRT, WOMEN'S MATERNITY



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | 1. DOCUMENT NUMBER | 2. DOCUMENT DATE (YYMMDD) |
|---|---|---|
| | A-A-55189 | 93-03-25 |

3. DOCUMENT TITLE
SKIRT, MATERNITY

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle Initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>(1) Commercial<br>(2) AUTOVON<br>(If applicable) | 7. DATE SUBMITTED (YYMMDD) |

8. PREPARING ACTIVITY

| a. NAME | b. TELEPHONE (Include Area Code) | |
|---|---|---|
| Defense Personnel Support Center<br>ATTN: DPSC-FSSD (12-3-D) | (1) Commercial<br>215-737-8105 | (2) AUTOVON<br>444-8105 |
| c. ADDRESS (Include Zip Code)<br>2800 South 20th Street<br>P. O. Box 8419<br>Philadelphia, Pennsylvania 19101-8419 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Quality and Standardization Office<br>5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466<br>Telephone (703) 756-2340 AUTOVON 289-2340 | |

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.