
METRIC

MILITARY SPECIFICATION SHEET

PIN, STRAIGHT, HEADLESS, (DOWEL) STANDARD SIZE, METRIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63478.

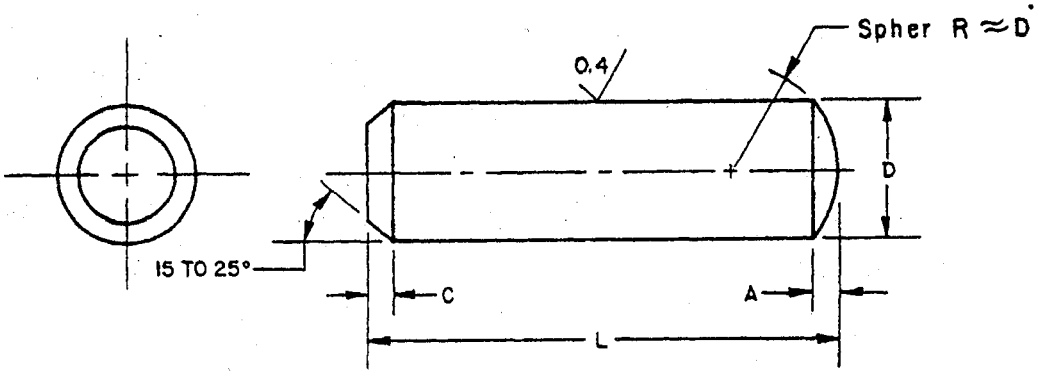

NOTE:

Unless otherwise specified, dimensions are in millimeters.

REQUIREMENTS:

1. Material: Carbon or alloy steel.
2. Protective finish: Plain (code -) may be furnished with black oxide coating. Cadmium plating (code C); Phosphate coating (code P).
3. Part number: Consist of letter "D", the basic number of this specification sheet, dash number taken from table I, and finish code identifier when required.

Example: D63478/1-3 P

- finish code identifier
- dash number
- specification sheet number

FSC 5315
Source: https://assist.dla.mil -- Downloaded: 2026-10-30T02:34Z
Check the source to verify that this is the current version before use.

TABLE I.

Nominal size		1.5	2	2.5	3	4	5	6	8	10	12	14	16	20	25
D Diameter	max	1.508	2.008	2.508	3.008	4.012	5.012	6.012	8.015	10.015	12.018	14.018	16.018	20.021	25.021
	min	1.502	2.002	2.502	3.002	4.004	5.004	6.004	8.006	10.006	12.007	14.007	16.007	20.008	25.008
C Chamfer	max	0.4	0.6	0.7	0.8	1.0	1.2	1.5	1.8	2.0	2.5	2.5	3.0	4.0	4.5
A Radius	max	0.23	0.30	0.40	0.45	0.60	0.75	0.90	1.20	1.50	1.80	2.00	2.50	3.00	4.00
L Length + 0.5 mm		Dash numbers													
2 + 0.5 mm															
3 + 0.5 mm															
4 + 0.5 mm		3													
5 + 0.5 mm		4													
6 + 0.5 mm		5	30	55											
8 + 0.5 mm		6	31	56	81										
10 + 0.5 mm		7	32	57	82	107									
12 + 0.5 mm		8	33	58	83	108	133								
16 + 0.5 mm		9	34	59	84	109	134	159							
20 + 0.5 mm			35	60	85	110	135	160	185						
25 + 0.5 mm				61	86	111	136	161	186	211					
30 + 0.5 mm					87	112	137	162	187	212	237				
35 + 0.5 mm						113	138	163	188	213	238	263			
40 + 0.5 mm						114	139	164	189	214	239	264	289		
45 + 0.5 mm							140	165	190	215	240	265	290		
50 + 0.5 mm							141	166	191	216	241	266	291	316	
55 + 0.8 mm								167	192	217	242	267	292	317	
60 + 0.8 mm								168	193	218	243	268	293	318	343
70 + 0.8 mm									194	219	244	269	294	319	344
80 + 0.8 mm									195	220	245	270	295	320	345
90 + 0.8 mm										221	246	271	296	321	346
100 + 0.8 mm										222	247	272	297	322	347
120 + 0.8 mm												273	298	323	348

Source: https://assistdla.mil + Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Air Force - 99

Review activities:
Army - AT
Air Force - 11
DLA - IS
NSA - NS

User activities:
Army - ME

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5315-0318)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.