| INCH-POUND |

MIL-P-29183/16
18 June 1990

MILITARY SPECIFICATION SHEET

PANELBOARD, POWER DISTRIBUTION, PORTABLE, WEATHERPROOF,
TYPE 1, CLASS 1, CONFIGURATION 1: 208Y/120 VOLT, 60 KILOWATT

This specification is approved for use by all agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-P-29183B

REQUIREMENTS:

The distribution panel shall be as specified herein and in accordance with tables I and II, and figure 1. Required necessary equipment shall be as specified in table III.

Physical:

Weight (nominal): 100 pounds (34 kilograms).
Dimensions (maximum):
Length: 25 inches (623 millimeters (mm)).
Width: 16 inches (470 mm).
Height: 20 inches (419 mm).

Electrical:

Input: 208Y/120 volt (V), 3 phase, 4 pole (P), 5 wire (W), 60 hertz.
Bus capacity: 200 amperes (A).

Government part number - M29183/16

AMSC N/A

FSC 6110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.

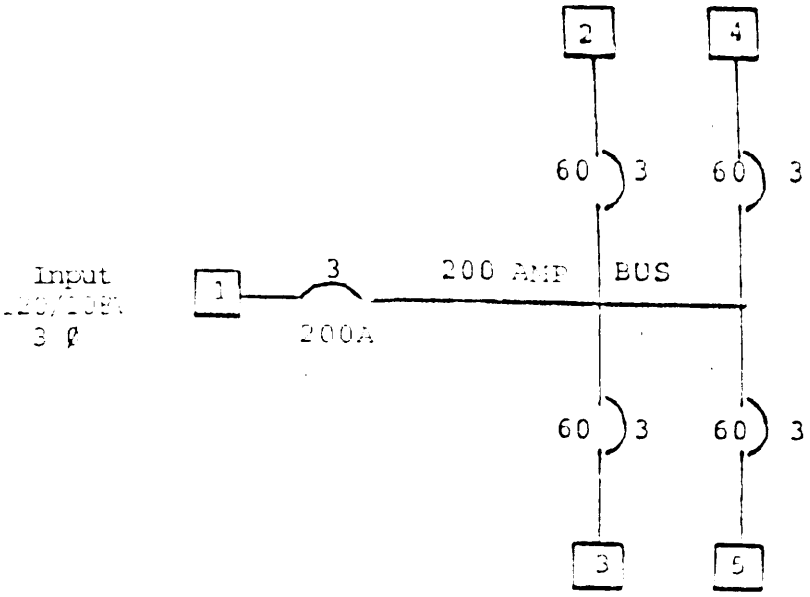


FIGURE 1. Single-line wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE I. Circuits' characteristics.

Quantity	Circuit kind	Circuit breaker Pole (P) - Ampere (A)	Interface connector 1/
1	208Y/120V, 3 phase, 5W	3P-200A (Main)	Input, MS90558C52412P

TABLE II. Connector assignment and connector terminal wiring.

Circuit	Function	Connector type	Phase A, black wire	Phase B, red wire	Phase C, blue wire	Neutral white wire	Ground green (bare) wire
1	Input	MS90558C52412P	A	B	C	N	G
2,3	Branch	MS90555C32412S	A	B	C	N	G
4,5	Branch	MS90555C32412S	A	B	C	N	G

1/ Connector designations are military part number for military type connectors conforming to MIL-C-22992.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.

TABLE III. Required accessory equipment.

Item	Quantity	Description	Military part number
1	1	MIL-C-22992, class L, 200A wall mount plug, with coupling ring, connector	MS90558C52412P
2	1	Protective cover (plug) for item 1	MS90564-11C
3	4	MIL-C-22992, class L, 60A, wall mount socket receptacle connector	MS90555C32412S
4	4	Protective receptacle cover for item 3	MS90563-3C

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Navy - MC, MS
Air Force - 80
DLA - GS

Preparing Activity:
Navy - YD

(Project 6110-0335-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T21:59Z
Check the source to verify that this is the current version before use.