INCH-POUND

A-A-50376

23 May 1990

COMMERCIAL ITEM DESCRIPTION

BELT, MILITARY POLICE (WHITE)

This Commercial Item Description is authorized for use in preference to MIL-B-21880.

1. ABSTRACT

1.1 Scope. This commercial item description covers the requirements for one type of white woven adjustable belt used by Navy personnel performing duties as military police, honor guard, and at other specified occasions.

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The belt shall be of white cotton webbing having two slide keepers, a female snap fastener and a hook type belt closure. It shall have an adjustable buckle enabling an adjustment range of the finished belt from 25 inches to 42 inches in length.

2.1.1 Webbing. The webbing for the belt shall be bleached white, 2-1/4 inches wide, 3.40 minimum ounces per linear yard, conforming to type IV, class 2 of MIL-W-530.

2.1.2 Tape. The tape for binding the ends of the belt shall be bleached white, 7/8 or 1 inch wide, conforming to type I, class 2 of MIL-T-43566.

2.1.3 Thread. The thread for seaming and stitching shall be bleached white, 3 ply, heavy cotton of sufficient size and strength for the intended applications.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

2.1.4 Hardware.

2.1.4.1 Snap fasteners, belt fastener, and slide keeper. The snap fasteners, belt fastener, and slide keeper shall be brass and the finish shall be as specified in 2.1.5 and shall be of adequate strength and design to function properly over the life of the end item.

2.1.4.2 Adjusting buckle. The adjusting buckle shall be brass or copper alloy and shall be finished as specified in 2.1.5 and shall be of adequate strength and design to function properly over the life of the end item. Design and dimensions shall be as shown in Figure 1.

2.1.5 Finish. All hardware components shall be given a mirror like polished finish with the surfaces and edges clean, smooth, and free from burrs, tool marks, sharp edges and roughness. All components shall be thoroughly lacquered with a clear synthetic lacquer. The dry lacquer film shall be continuous, level, adherent, and free from lint or other foreign inclusions. The components shall be free from pits, dents, nicks, and scratches.

2.2 Figures. Figure 1 is furnished for detailed dimensional requirements in construction of this belt.

2.3 Marking. Each belt shall have the contract number applied to the inside of the belt, centered, 2 (± 1/2) inches from the snap fastener. The marking shall be black with height of the numerals approximately 1/2 inch. The label shall show a minimum of "fair" colorfastness to laundering.

2.4 Workmanship. After completion, the belts shall be thoroughly cleaned and all loose thread, lint, and foreign matter removed. The belts shall be uniform in quality and shall be free from irregularities or defects which adversely affect performance, reliability, or durability.

2.5 Product demonstration model. During the solicitation phase, interested firms shall provide the Procuring Agency with two product demonstration models of the item they propose to furnish for evaluation. The two samples provided by the successful offerer shall be tagged and sealed. One shall be retained by the Procuring Agency and the other furnished the assigned Quality Assurance Representative (QAR) for use as a reference in performing the examination in paragraph 3.2 and the scoring of defects in design, material and workmanship not otherwise classified herein.

3. QUALITY ASSURANCE PROVISIONS

3.1 Certification. When requested by the contracting officer, the contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

3.2 Examination of the end item. The belts shall be inspected in accordance with MIL-STD-105. The defects found during the examination of the end item shall be classified as below. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 3.2.3. The lot size shall be expressed in units of belts. Sample unit shall be one belt.

3.2.1 Visual examination. The belts shall be examined for defects classified in accordance with the list below:

Defect	Classification Major	Minor
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGE		
a. Any size hole, cut, tear, needle chew, smash or float	X	
b. Any mend	X	
c. Webbing not one continuous piece or not tightly woven, or edges frayed or scalloped	X	
d. Binding omitted or wrong type	X	
e. Hardware broken or malformed, corroded areas, burrs or sharp areas	X	
f. Color not as specified		X
II. CLEANNESS		
a. Any spot or stain		X
b. Thread ends not trimmed		X
III. DESIGN AND ASSEMBLY		
a. Not cut or fabricated in accordance with the product demonstration model	X	
IV. MARKING		
a. Exposed on outside of belt	X	
b. Omitted, illegible, incorrect, misplaced or size of characters not as specified		X
V. GENERAL		
a. Any defect not otherwise classified herein but at variance with the product demonstration model		X

3.2.2 Dimensional examination. The belts shall be examined for defects in dimension in accordance with the following:

a. Maximum adjustable length less than 42 inches.
b. Minimum adjustable length more than 25 inches.
c. Adjustable buckle or female fastener loop, less than 1-3/4 inches or greater than 2-1/4 inches long.
d. Webbing width not as specified.
e. All other Figure 1 dimensions not within specified tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

3.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units, for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For examination in 3.2.1		
Major	2.5	II
Total (Major and Minor combined)	10.0	II
For examination in 3.2.2	4.0	S-3

4. PACKAGING

4.1 Preservation. Each belt shall be folded in half with the adjusting buckle placed on the outside of the fold. The folded belt shall measure approximately 14-1/2 inches in length. Six (6) folded belts shall be neatly stacked in a bundle with every three belts alternately reversed end to end. Alternatively, six folded belts shall be neatly stacked in a bundle with every other belt reversed end for end. Each bundle shall be securely tied with cotton tape or twine approximately 2 inches in from end.

4.2 Packing. One hundred and forty-four (144) belts packaged as specified in 4.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 275, variety DW, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Packages shall be packed on edge, four in length, one in width and six in depth within a shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper.

4.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

4.4 Palletization. When specified (see 5.1), item, packed as specified in 4.2. shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5. NOTES

5.1 Acquisition requirements. The acquisition document shall specify the following:

a. Title and date of this document.
b. When palletization is required (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

5.2 Source of government documents. Copies of military and federal documents are available from:

Standarization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094


Custodian:
Navy - NU


Preparing activity:
Navy - NU

Review activity:
DLA - CT

Project 8465-N051

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

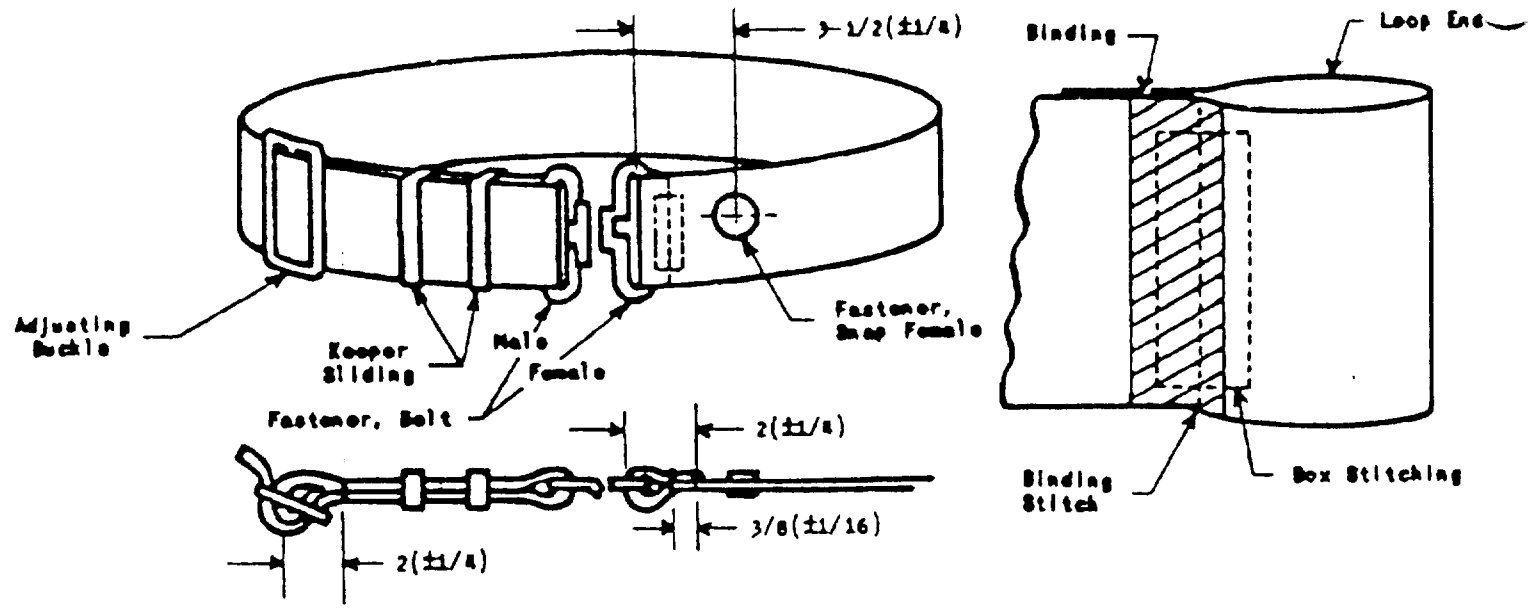

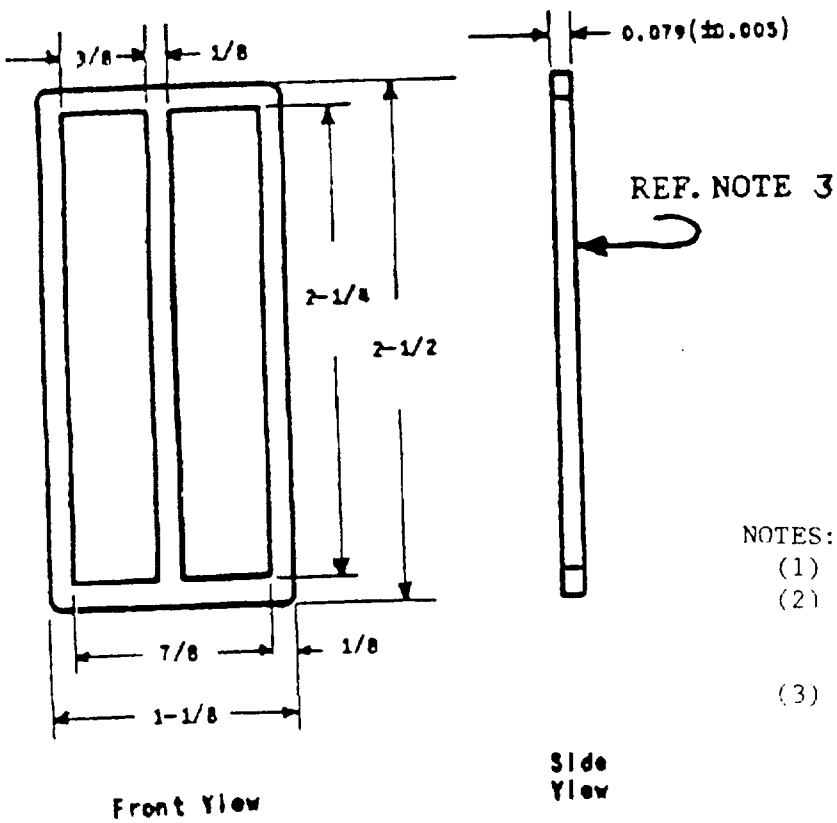

Adjusting Buckle

NOTES:
(1) Dimensions are in inches.
(2) Tolerances for adjusting buckle shall be +1/16, -1/32 inch, except where the tolerance is indicated.
(3) All corners and edges shall be slightly beveled.

FIGURE 1 - BELT, MILITARY POLICE (WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

NAVY CLOTHING AND TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD (code 50)
NATICK, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-50376	BELT, MILITARY POLICE (WHITE)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:42Z
Check the source to verify that this is the current version before use.