INCH-POUND
MIL-C-22249/10A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/10(SHIPS)
19 April 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 72-PIN, MISSILE SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

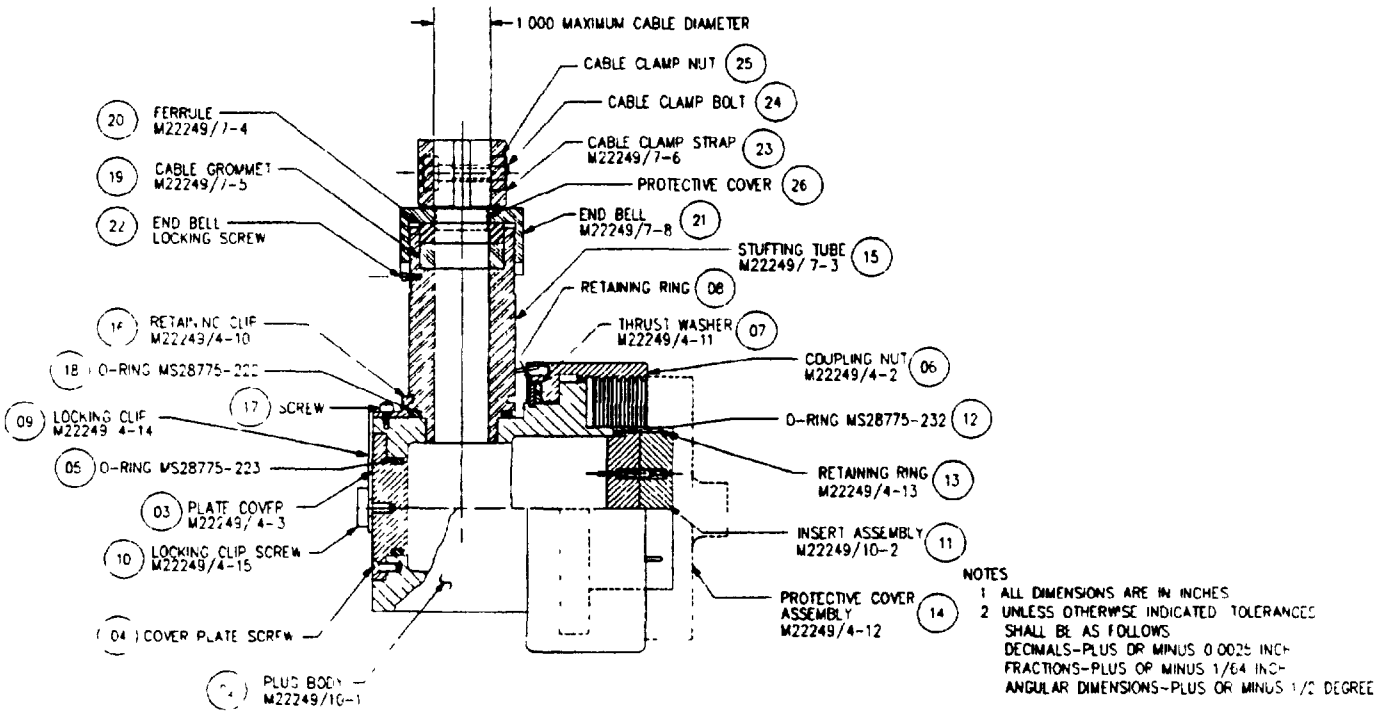


FIGURE 1 Plug assembly, 72-pin, missile side (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:36Z
Check the source to verify that this is the current version before use.

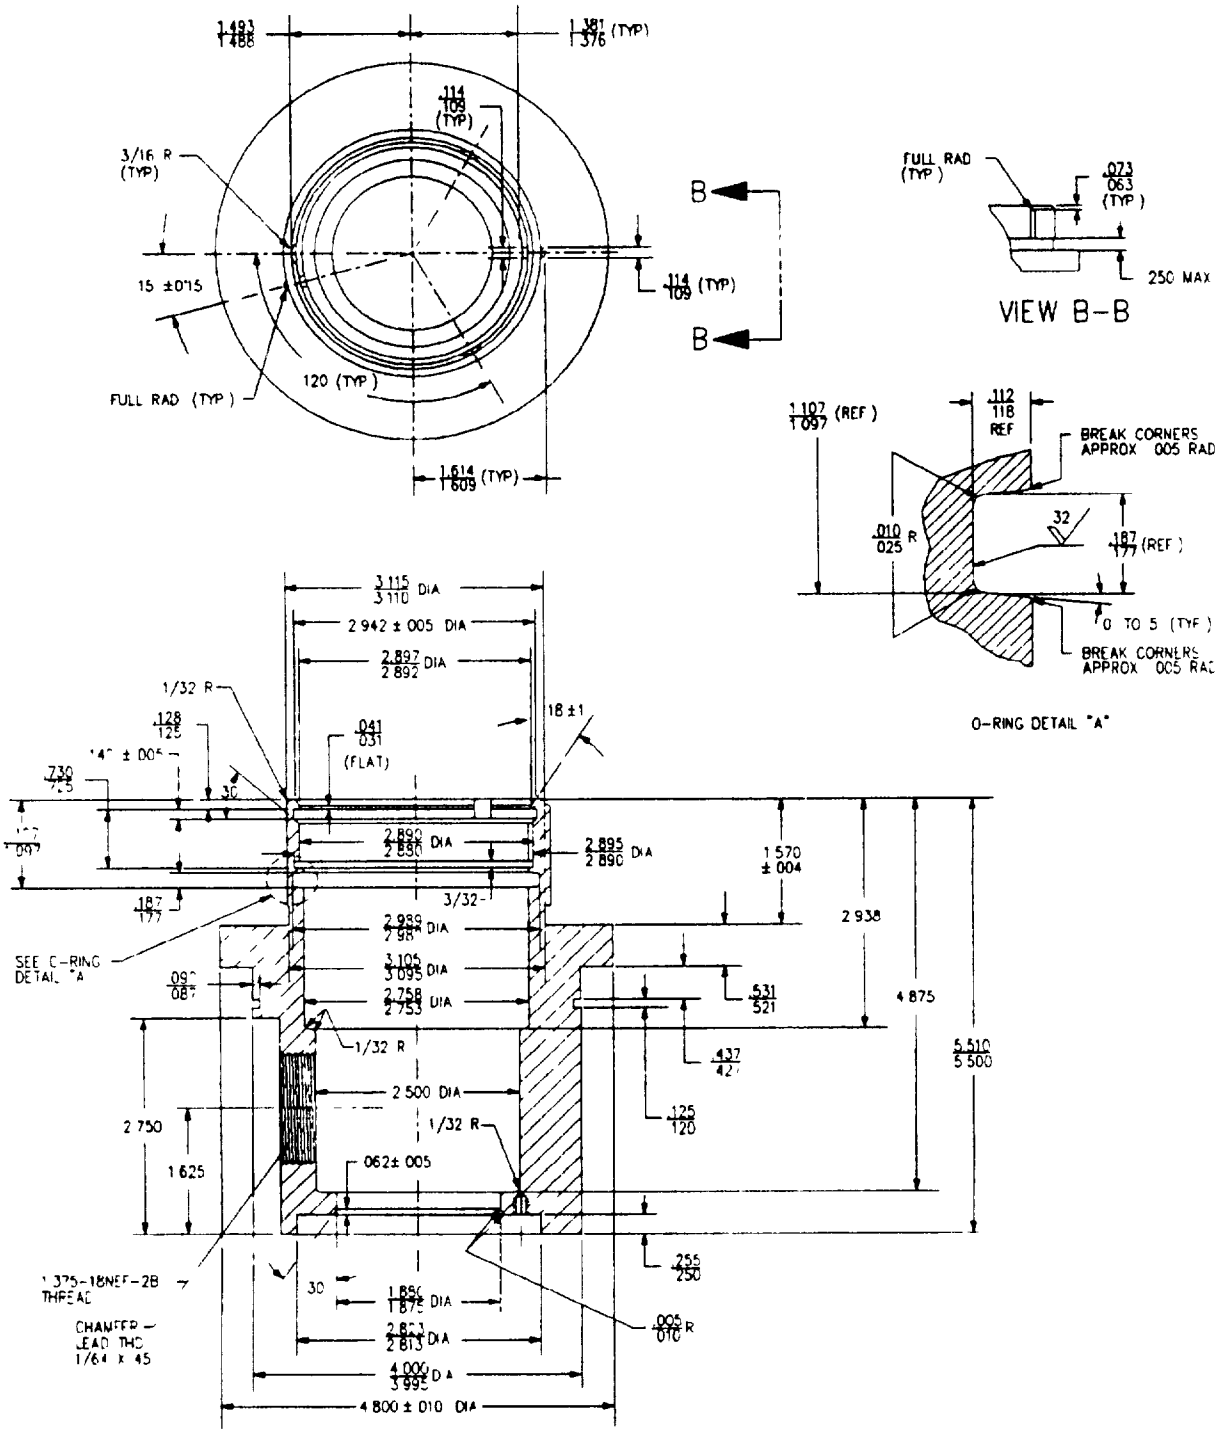


FIGURE 2 Plug body M22249/10-1 (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:36Z
Check the source to verify that this is the current version before use.

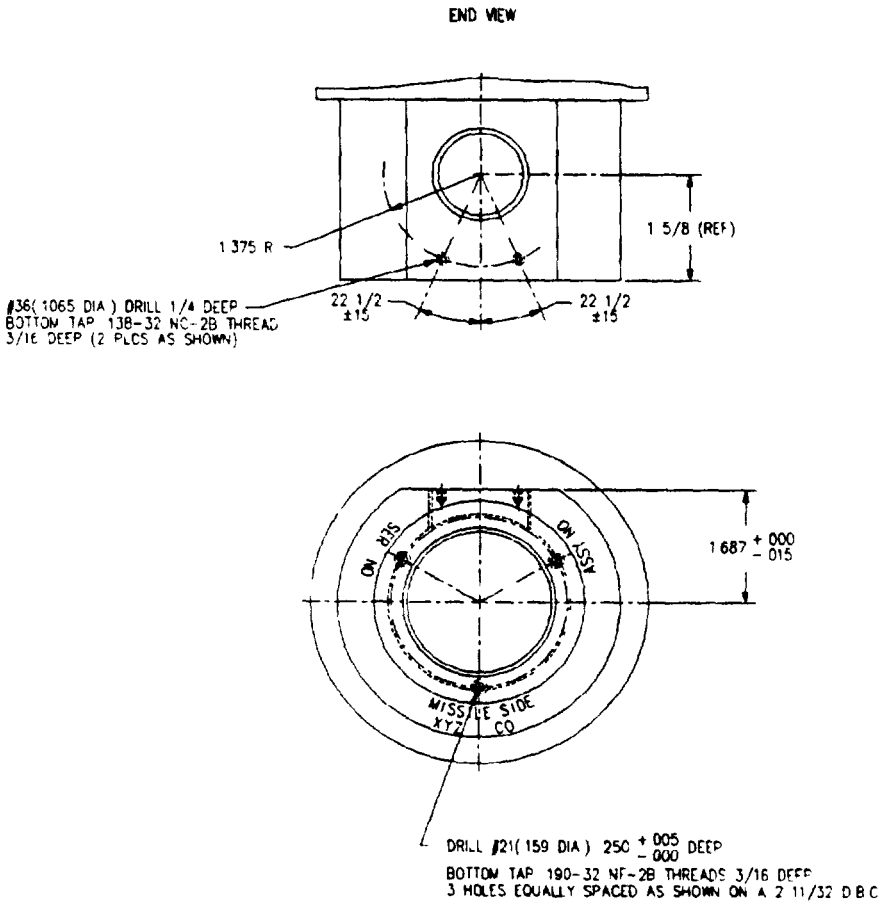


FIGURE 2. Plug body M22249/10-1 - Continued (02)

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:36Z
Check the source to verify that this is the current version before use.

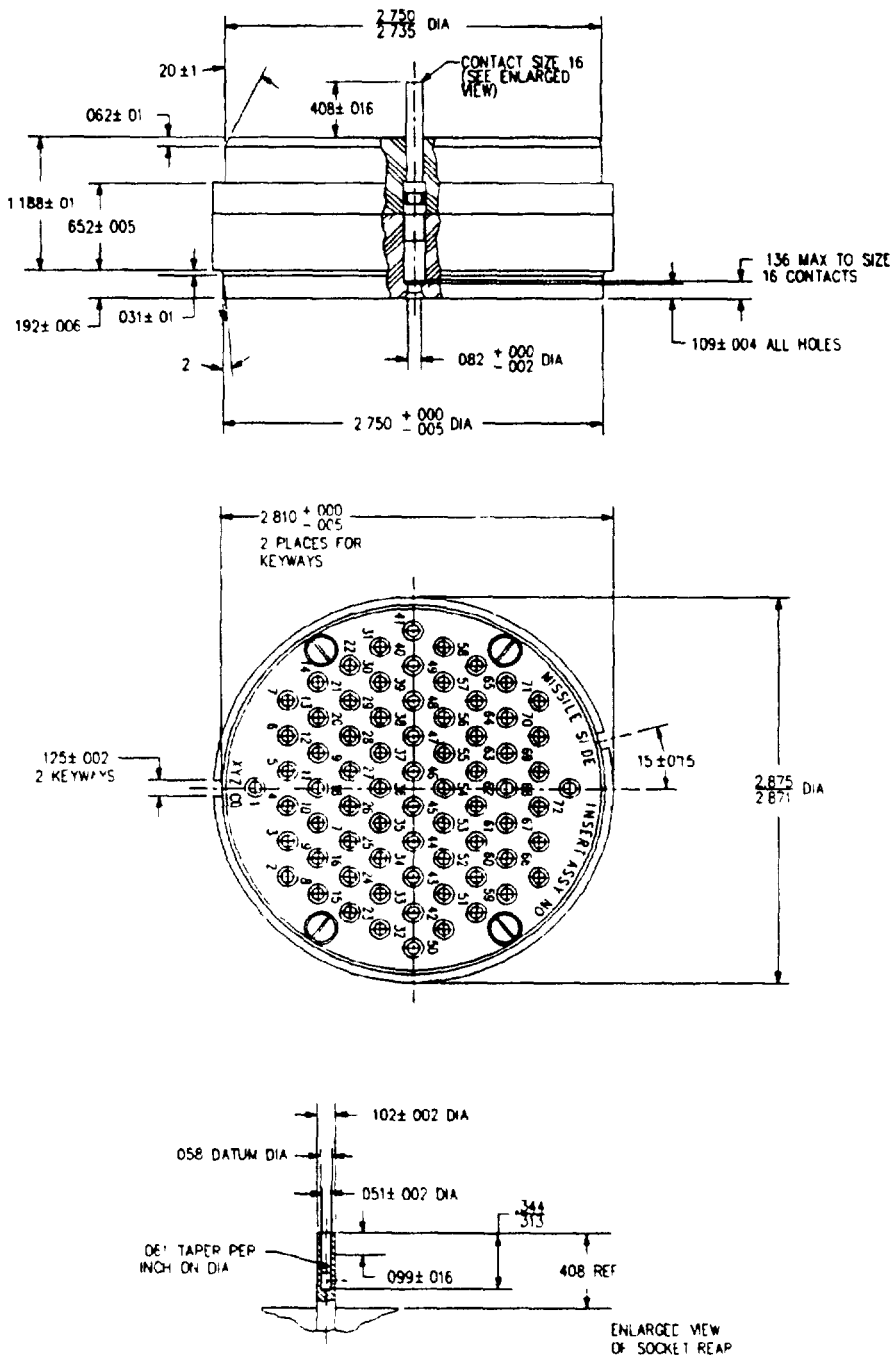


FIGURE 3. Insert assembly 72 pin - missile side M22249/10-2 (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:36Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 72-pin, missile side			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 2
03	Cover plate	1	M22249/4-3	
04	Screw, .190-32NF-2Ax7/16	3	Nylok M32CRB1032-7P (or equal)	
05	O-ring	1	MS28775-223	
06	Nut, coupling	1	M22249/4-2	
07	Washer, thrust	1	M22249/4-11	
08	Retaining ring, coupling nut	1	Spirolox RST-400 (or equal)	
09	Locking clip, coupling nut	1	M22249/4-14	
10	Screw, locking clip	1	M22249/4-15	
11	Insert assembly	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 3
12	O-ring	1	MS28775-232	
13	Retaining ring, insert assembly	1	M22249/4-13	
14	Cover, protective	1	M22249/4-12	
15	Stuffing tube	1	M22249/7-3	
16	Retaining clip, cable stuffing tube	1	M22249/4-10	
17	Screw, 138-32NC-2Ax5/16	2	Nylok M33CRB632-5P (or equal)	
18	O-ring	1	MS28775-222	
19	Grommet, cable	1	M22249/7-5	
20	Ferrule	1	M22249/7-4	
21	End bell	1	M22249/7-8	
22	Screw, .112-40NC-2Ax1/4	1	Nylok M33CRB440-4P (or equal)	
23	Clamp, cable	2	M22249/7-6	
24	Bolt, 3125-18NC-2Ax1 1/2	2	CRES/Class 302 to 305 QQ-S-763	
25	Nut, .312-18NC-2B	2	Nylok E6CR518-P (or equal)	
26	Cover, protective	1	Polyethylene, COML	

See footnotes at top of next page

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:36Z
Check the source to verify that this is the current version before use.

[1]Item numbers are the same as shown on figures
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity
Navy - SH
(Project 5935-N278-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:36Z
Check the source to verify that this is the current version before use.