INCH-POUND
MIL-C-22249/15A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/15(SHIPS)
19 APRIL 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 138-PIN, COMPARTMENT SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

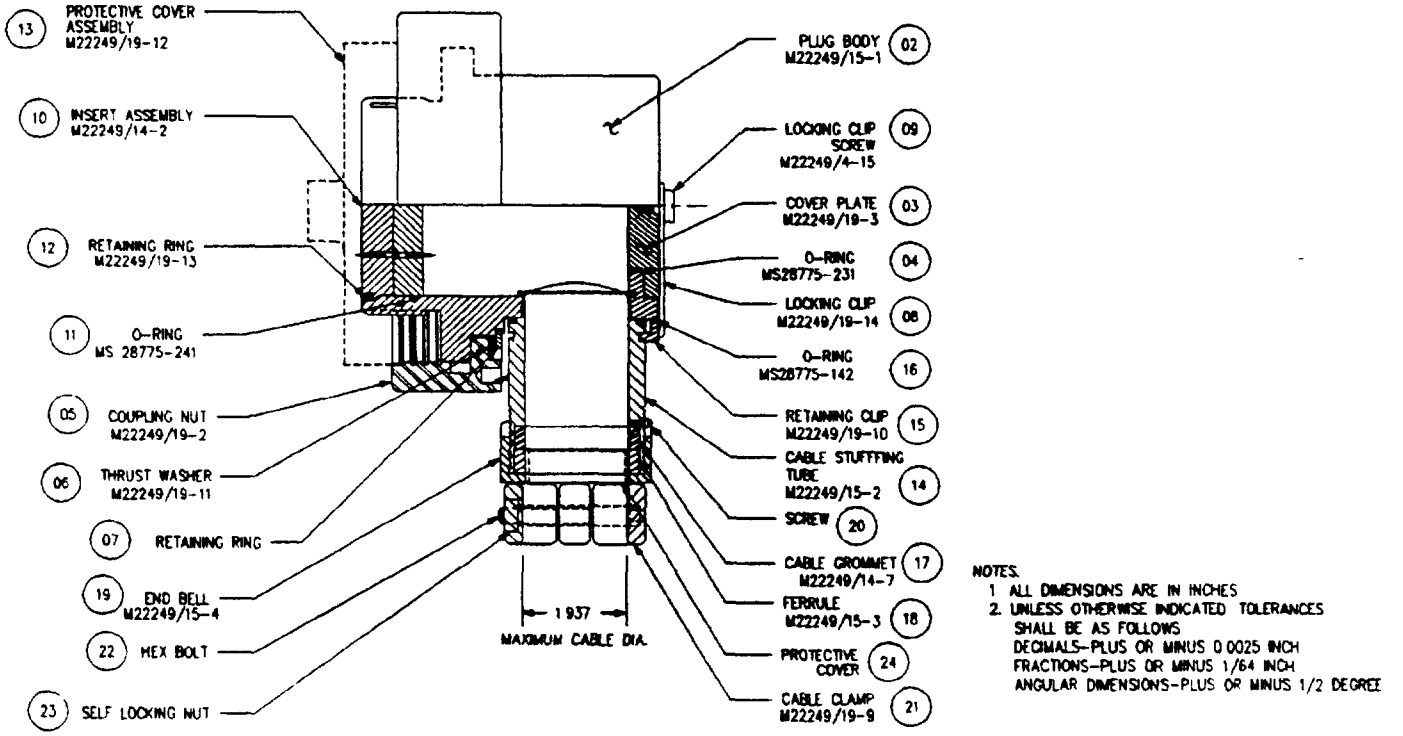


FIGURE 1. Plug assembly, 138-pin, compartment side. 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

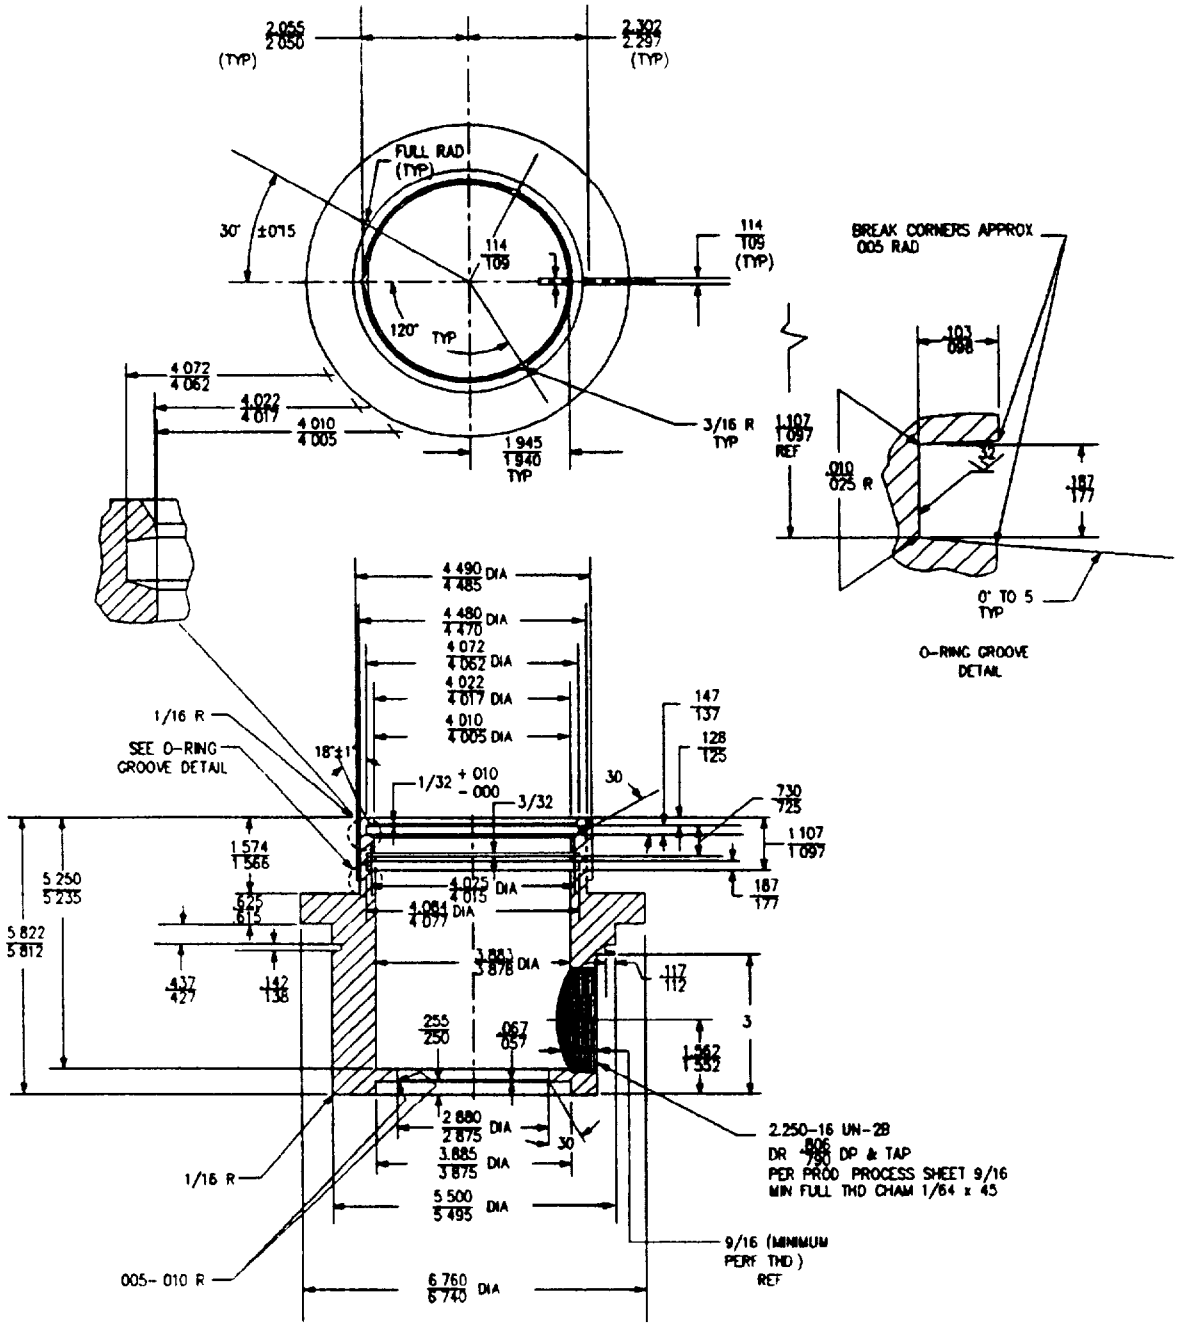


FIGURE 2. Plug body M22249/15-1. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

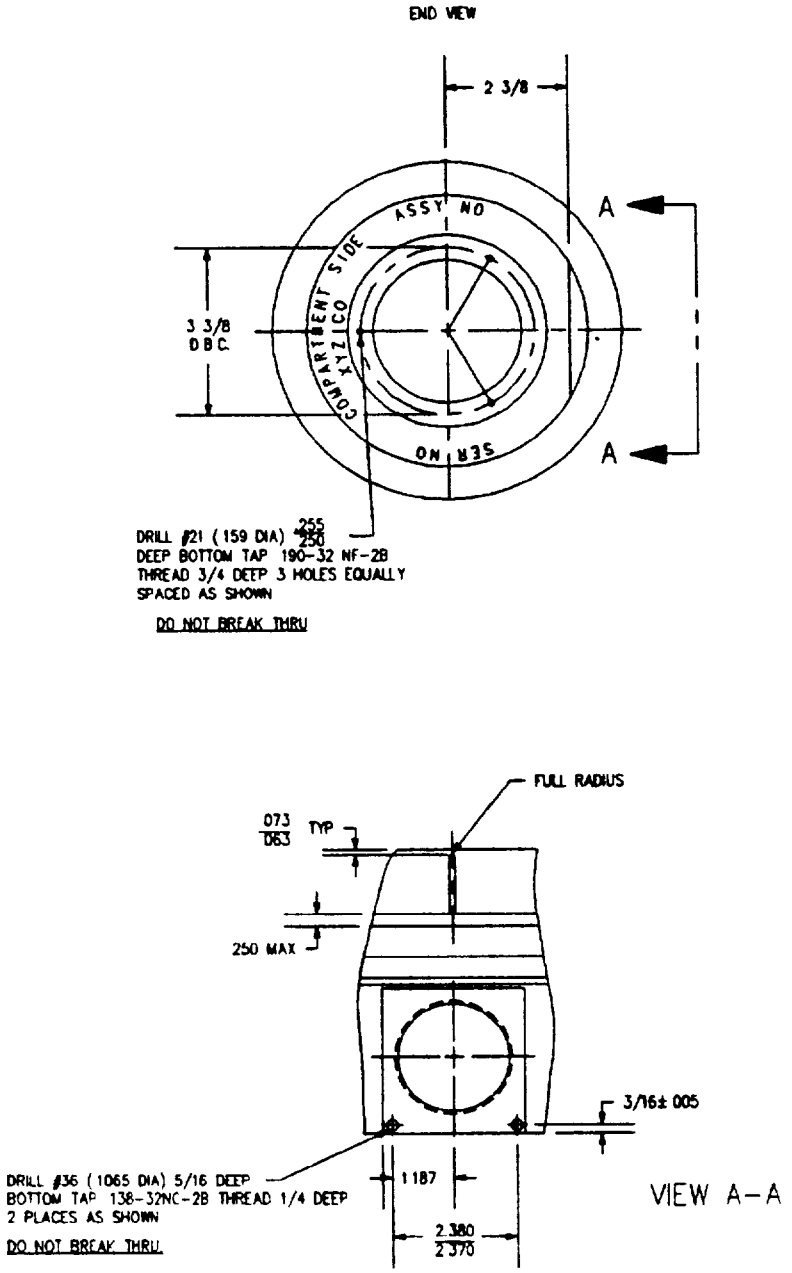


FIGURE 2 Plug body M22249/15-1 - Continued. 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

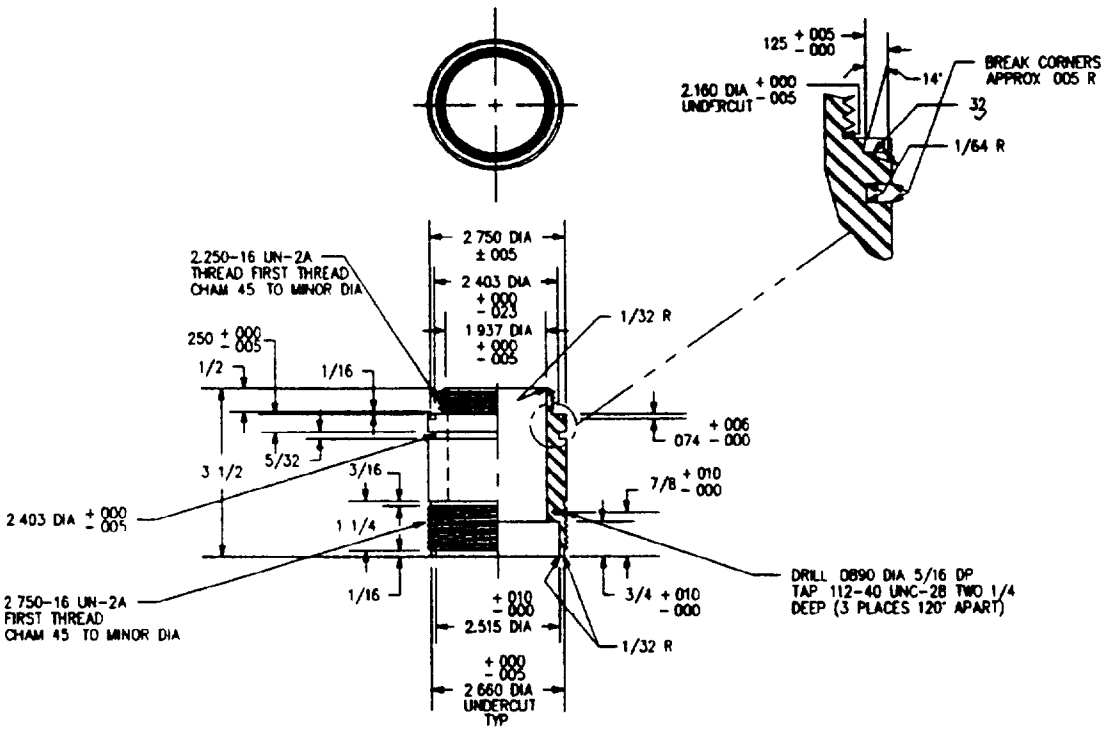


FIGURE 3. Cable stuffing tube M22249/15-2. (14)

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:37Z
Check the source to verify that this is the current version before use.

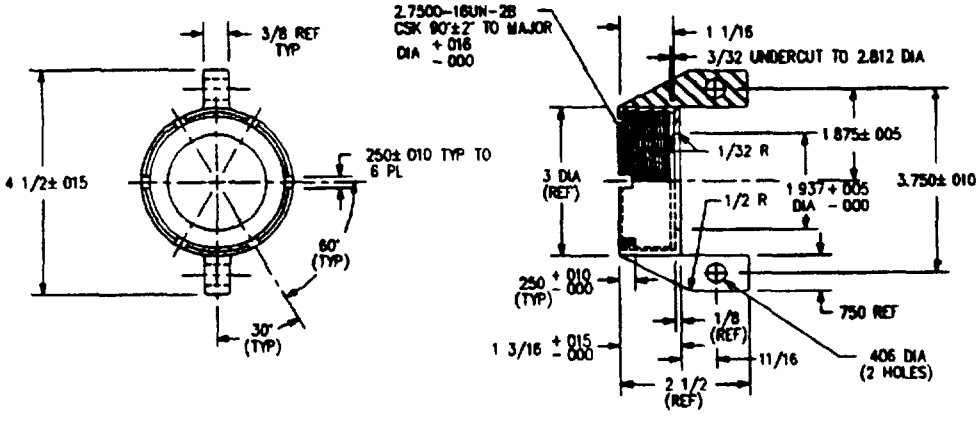


FIGURE 4. End bell M22249/15-4. (19)

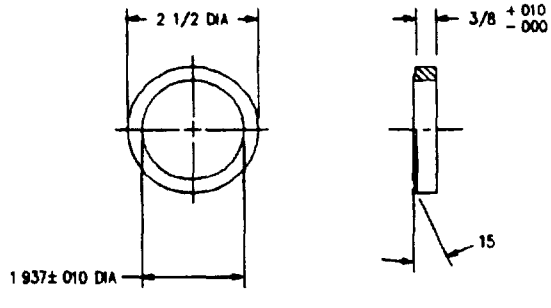


FIGURE 5. Ferrule M22249/15-3. (18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 138-pin, compartment side			Figure
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 1
03	Cover plate	1	M22249/19-3	
04	O-ring	1	MS28775-231	
05	Nut, coupling	1	M22249/19-2	
06	Washer, thrust	1	M22249/19-11	
07	Retaining ring, coupling nut	1	Spirolox RST-550 (or equal)	
08	Locking clip, coupling nut	1	M22249/19-14	
09	Screw, locking clip	1	M22249/4-15	
10	Insert assembly	1	M22249/14-2	
11	O-ring	1	MS28775-241	
12	Retaining ring, insert assembly	1	M22249/19-13	
13	Cover, protective	1	M22249/19-12	
14	Cable stuffing tube	1	CRES/Class 316 QQ-S-763	Figure 3
15	Retaining clip, cable stuffing tube	1	M22249/19-10	
16	O-ring	1	MS28775-142	
17	Grommet, cable	1	M22249/14-7	
18	Ferrule	1	Polyamide plastic/ L-P-410	M22249/15-3 Figure 5
19	End bell	1	CRES/Class 316 QQ-S-763	Figure 4
20	Screw, .112-40NC-2Ax1/4	1	Nylok M33CRB440-4P (or equal)	
21	Clamp, cable	2	M22249/19-9	
22	Bolt, .375-16NC-2Ax1 7/8	2	CRES/Class 302 to 305 QQ-S-763	
23	Nut, .375-16NC-2B	2	Nylok E6CR616 P (or equal)	Hex head
24	Cover, protective	1	Polyethylene, COML	
	Screw, .190-32NF-2Ax7/16	3	Nylok M32CRB1032-7P (or equal)	For plug body cover plate
	Screw, .138-32NC-2Ax5/16	2	Nylok M33CRB632-5P (or equal)	For stuffing tube retaining clip

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

[1]Item numbers are the same as shown on figures.
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 5935-N278-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.