INCH-POUND
MIL-C-22249/16A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/16(SHIPS)
19 APRIL 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, PLUG ASSEMBLY, 138-PIN, MISSILE SIDE

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-22249(SH).

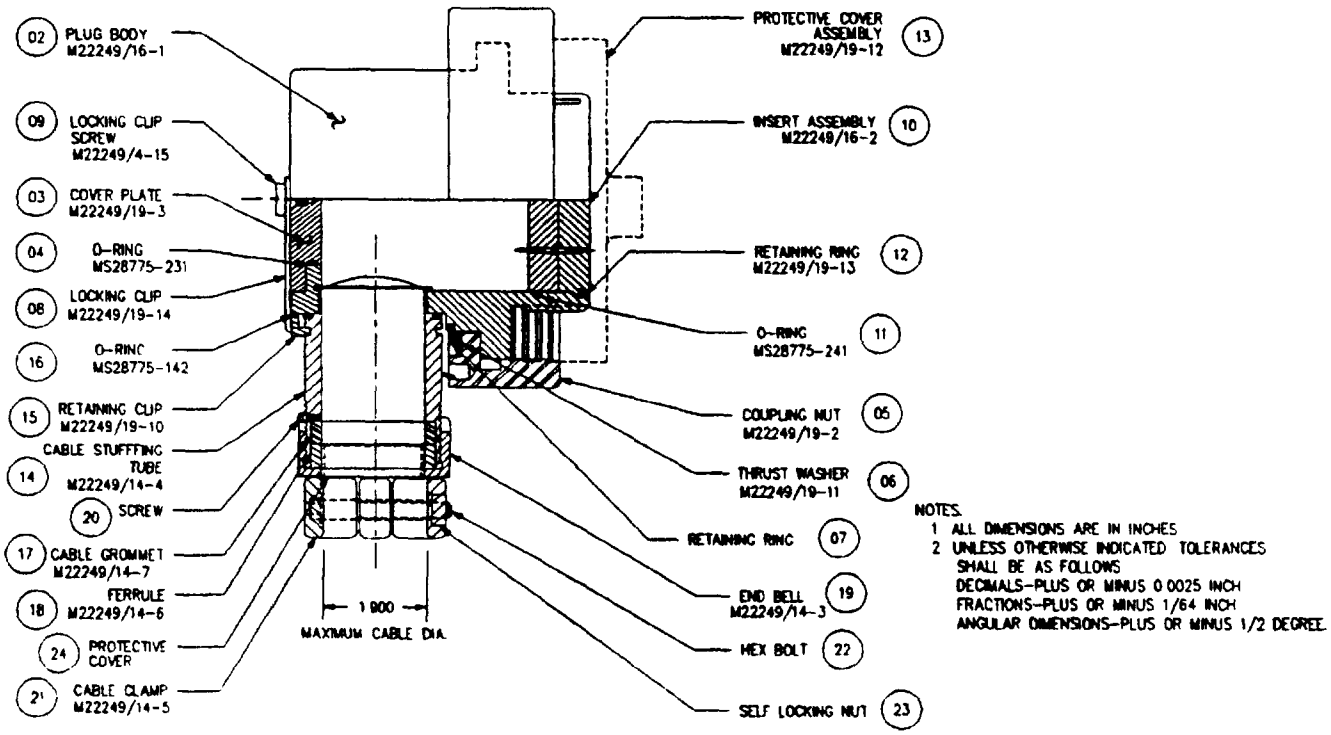


FIGURE 1 Plug assembly, 138-pin, missile side. 01

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

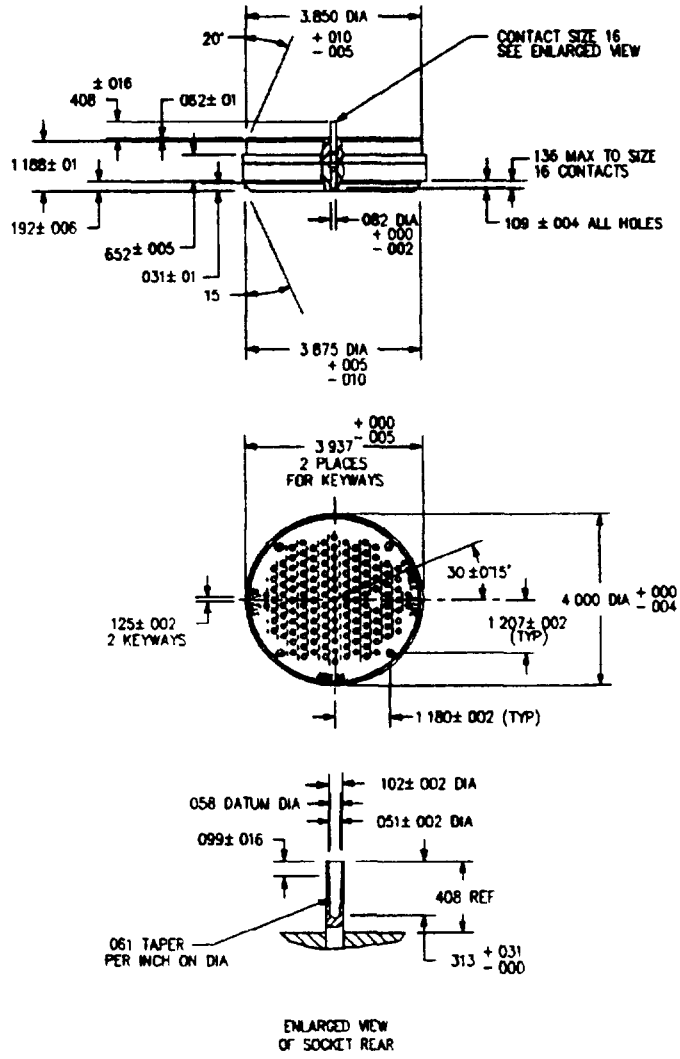


FIGURE 2 Insert assembly - 138-pin missile side M22249/16-2. (10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

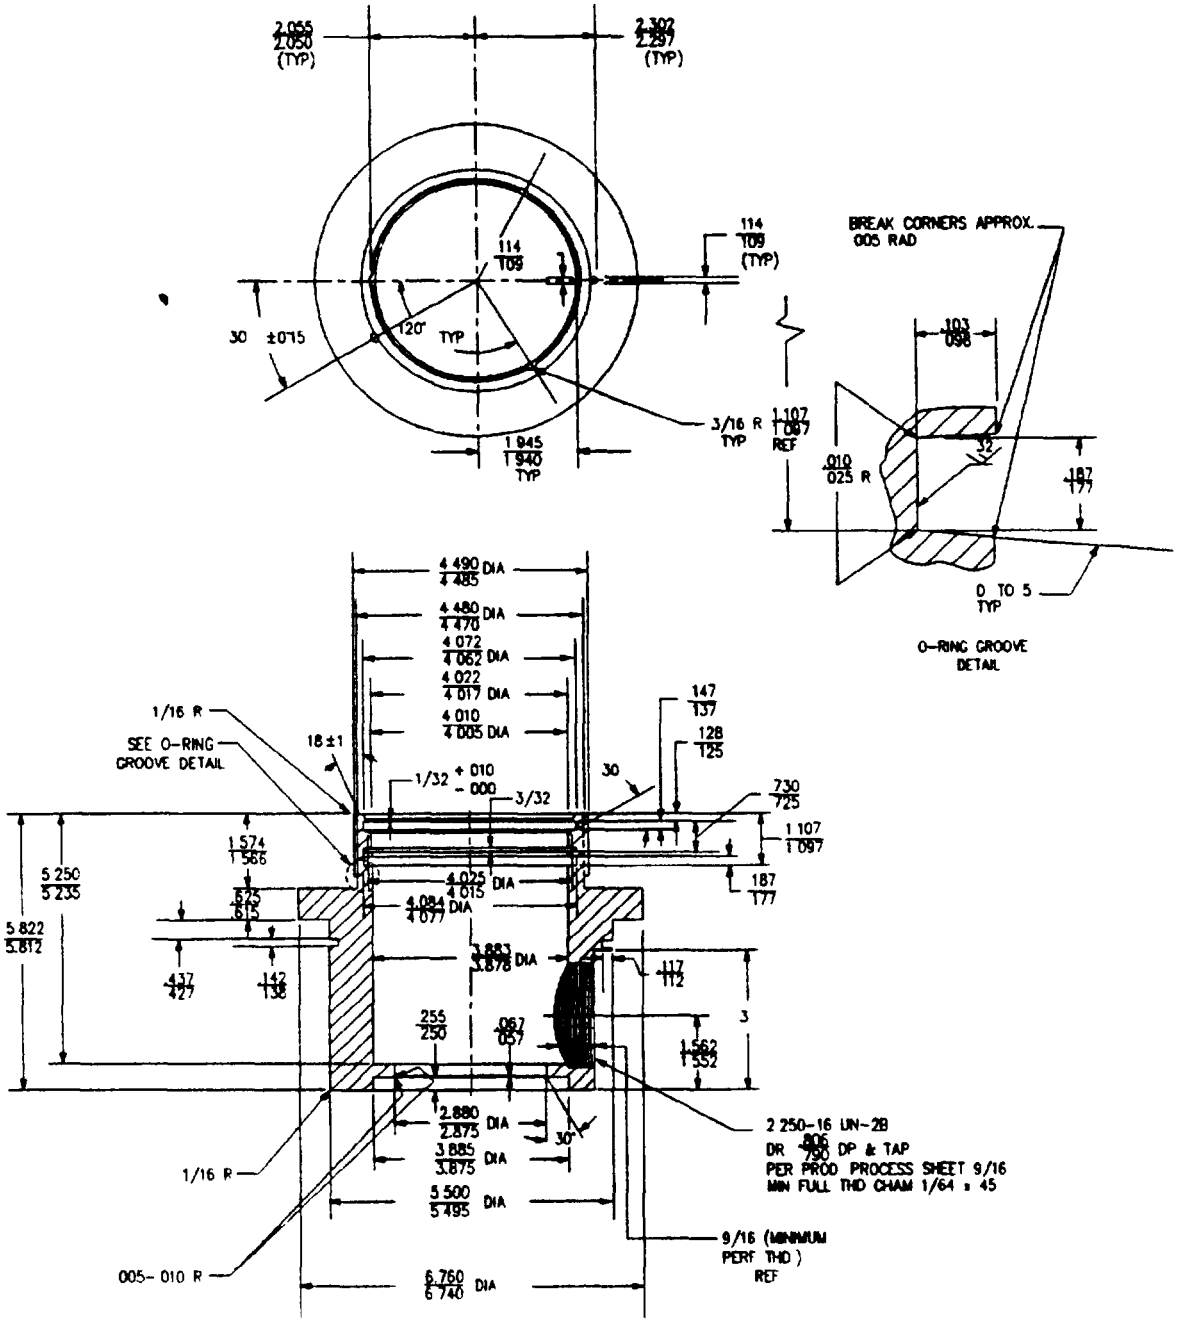


FIGURE 3. Plug body M22249/16-1. 02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

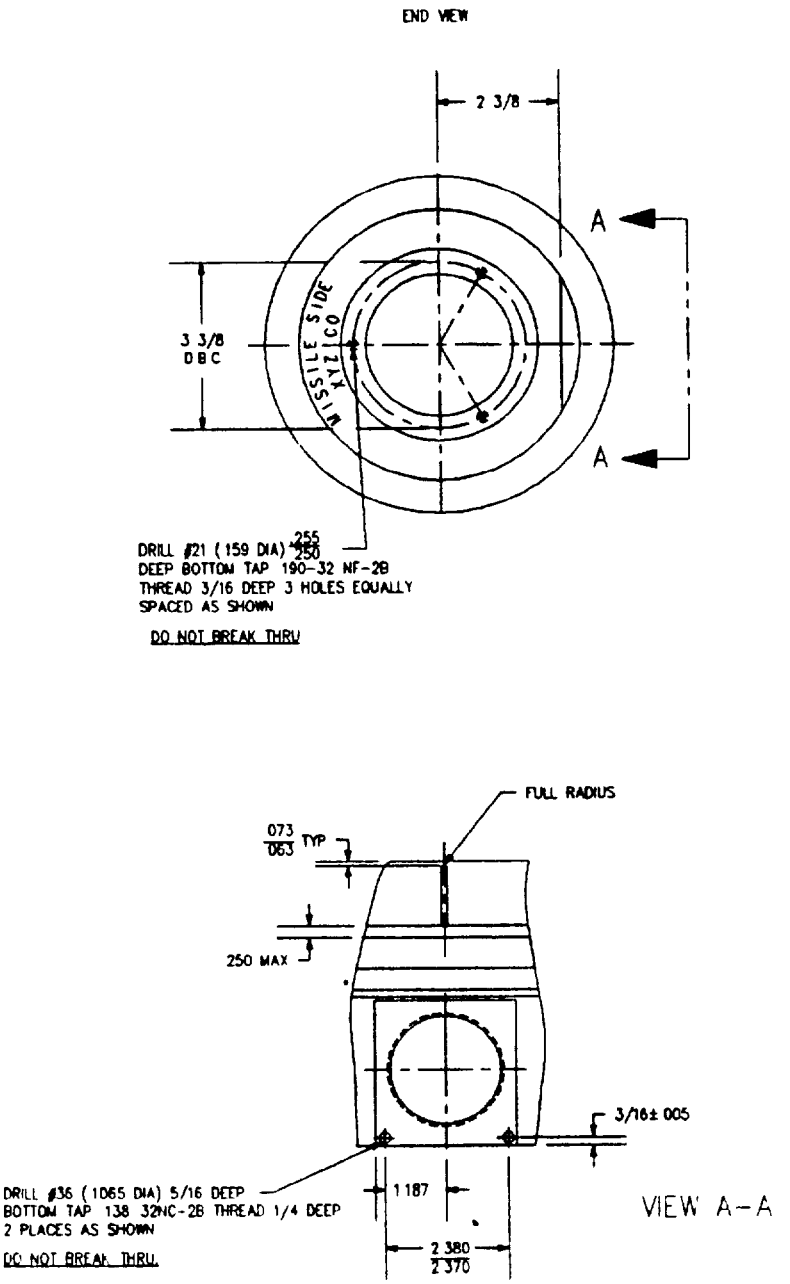


FIGURE 3. Plug body M22249/16-1 - Continued. (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Plug assembly, 138-pin, missile side			Figure 1
02	Plug body	1	CRES/Class 316 QQ-S-763	Figure 3
03	Cover plate	1	M22249/19-3	
04	O-ring	1	MS28775-231	
05	Nut, coupling	1	M22249/19-2	
06	Washer, thrust	1	M22249/19-11	
07	Retaining ring, coupling nut	1	Spirolox RST-550 (or equal)	
08	Locking clip, coupling nut	1	M22249/19-14	
09	Screw, locking clip	1	M22249/14-15	
10	Insert assembly	1	Diallyl Phthalate Type GDI-30, MIL-M-14	Figure 2
11	O-ring	1	MS28775-241	
12	Retaining ring, insert assembly	1	M22249/19-13	
13	Cover, protective	1	M22249/19-12	
14	Cable stuffing tube	1	M22249/14-4	
15	Retaining clip, cable stuffing tube	1	M22249/19-10	
16	O-ring	1	MS28775-142	
17	Grommet, cable	1	M22249/14-7	
18	Ferrule	1	M22249/14-6	
19	End bell	1	M22249/14-3	
20	Screw, .112-40NC-2Ax1/4	1	Nylok M33CRB440-4P (or equal)	
21	Clamp, cable	2	M22249/14-5	
22	Bolt, .375-16NC-2Ax1 7/8	2	CRES/Class 302 to 305 QQ-S-763	
23	Nut, .375-16NC-2B	2	Nylok E6CR616-P (or equal)	Hex head
24	Cover, protective	1	Polyethylene, COML	
	Screw, .190-32NF-2Ax7/16	3	Nylok M32CRB1032-7P (or equal)	For plug body cover plate
	Screw, .138-32NC-2Ax5/16	2	Nylok M33CRB632-5P (or equal)	For stuffing tube retaining clip

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.

[1]Item numbers are the same as shown on figures
[2]See applicable figure listed in remarks column for part numbers and dimensions.
[3]Quantity is for one complete assembly of each size.

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity:
Navy - SH
(Project 5935-N278-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:37Z
Check the source to verify that this is the current version before use.