
INCH-POUND
MIL-C-22249/6A(SH)
29 September 1989
SUPERSEDING
MIL-C-22249/6(SHIPS)
19 April 1968

MILITARY SPECIFICATION SHEET

CONNECTOR SETS, HEADER ASSEMBLY, 44-PIN

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation. MIL-C-22249(SH).

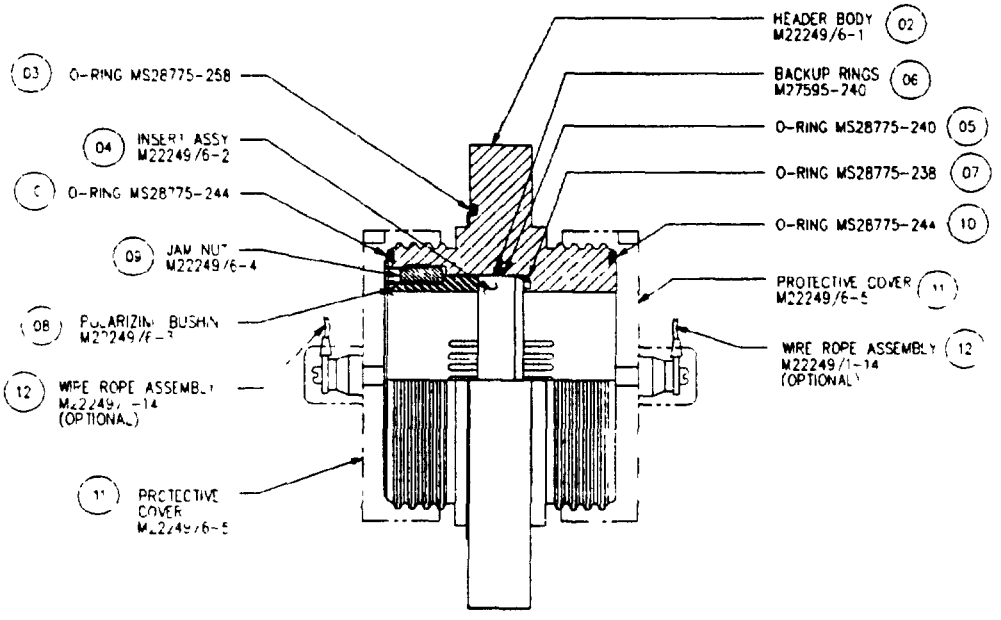

NOTES
1 ALL DIMENSIONS ARE IN INCHES
2 UNLESS OTHERWISE INDICATED TOLERANCES SHALL BE AS FOLLOWS
DECIMALS-PLUS OR MINUS 0.0025 INCH
FRACTIONS-PLUS OR MINUS 1/64 INCH
ANGULAR DIMENSIONS-PLUS OR MINUS 1/2 DEGREE

FIGURE 1 Header assembly, 44-pin. (01)

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

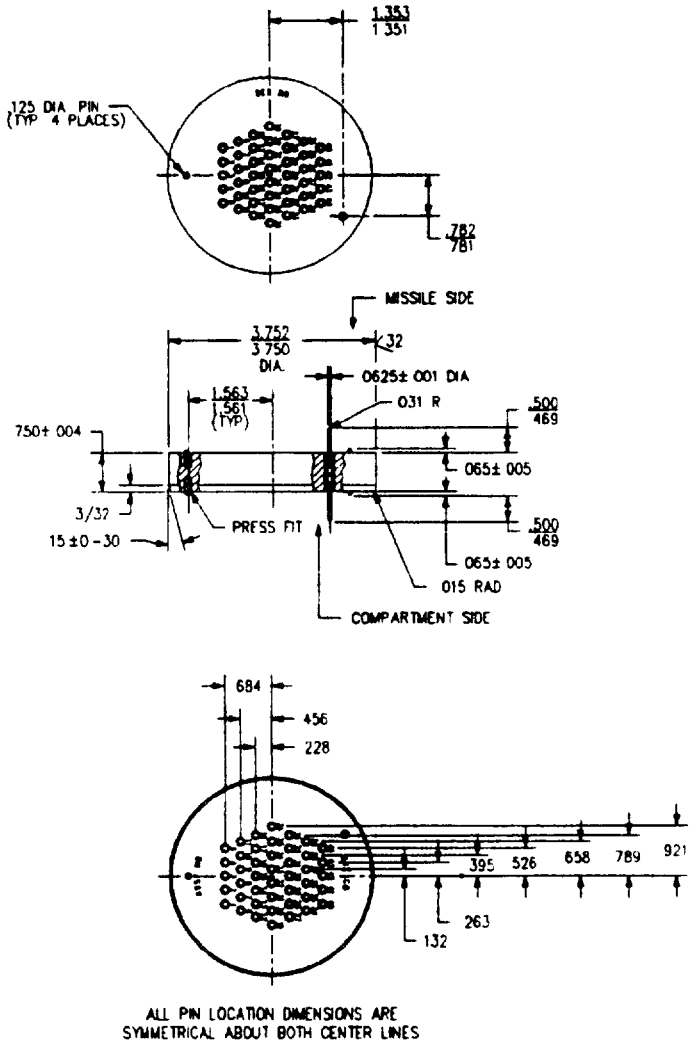


FIGURE 2 Header insert assembly M22249/6-2 (04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

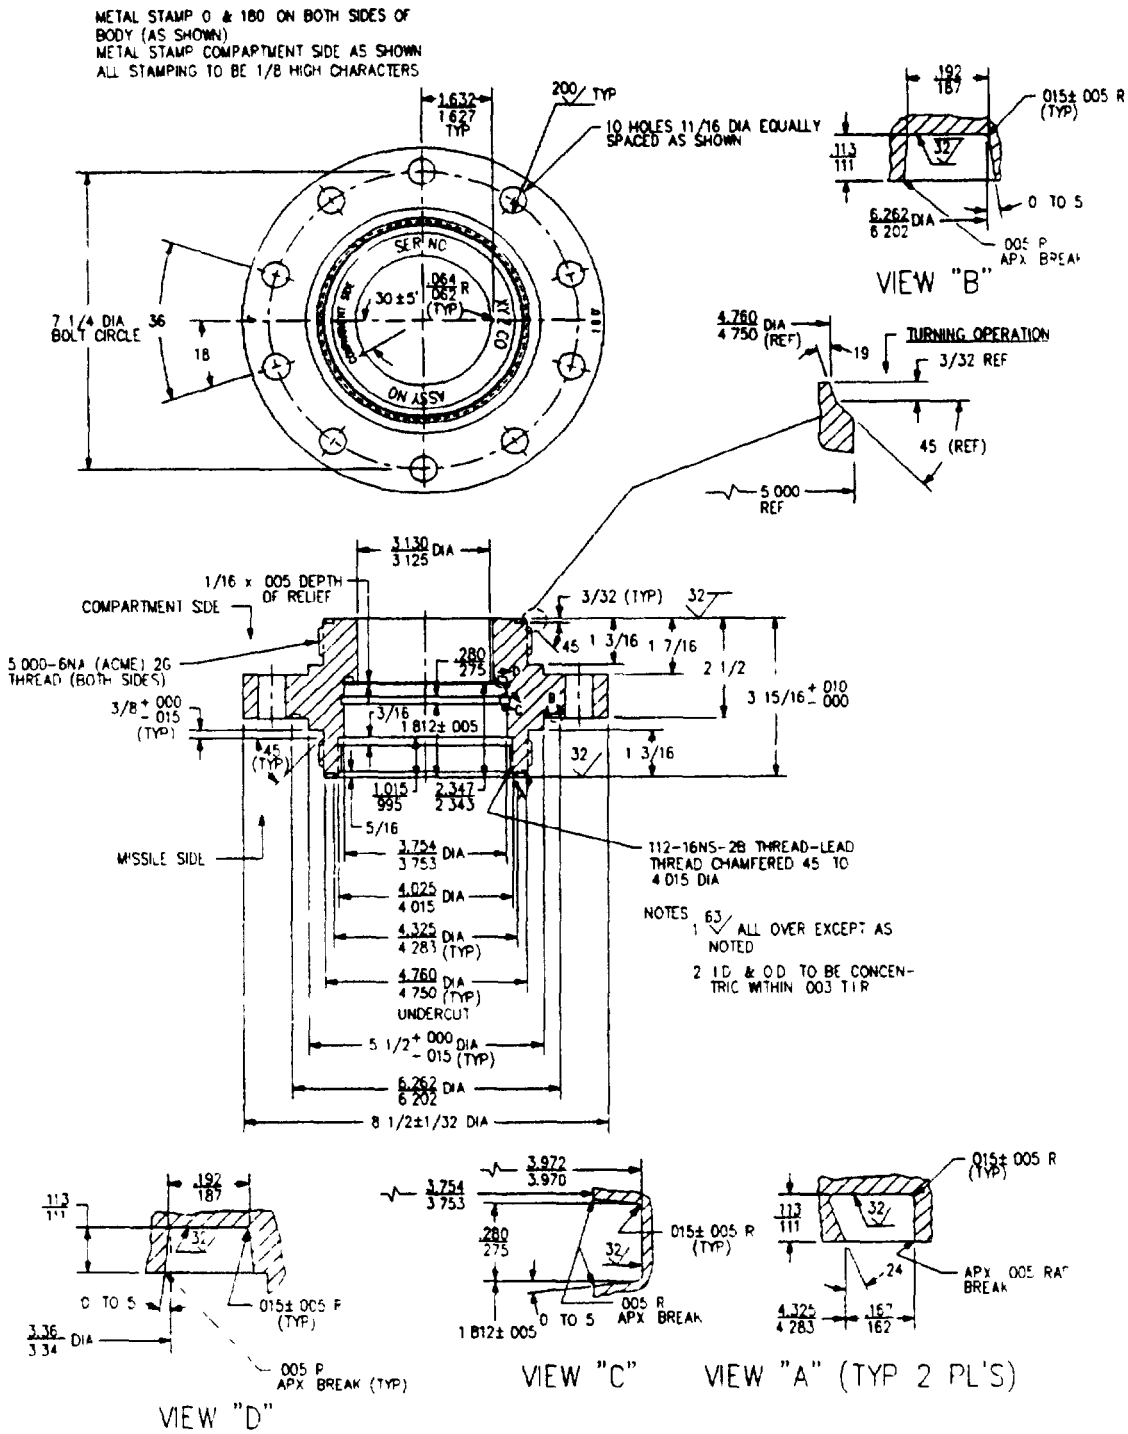


FIGURE 3 Header body M22249/6-1 (02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

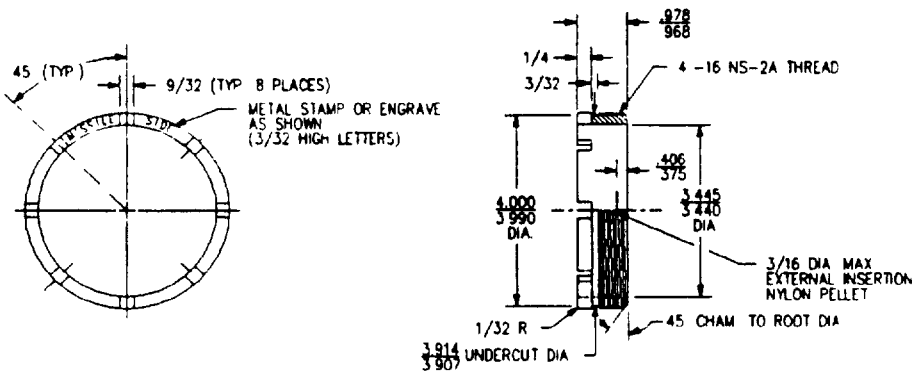


FIGURE 4. Jam nut M22249/6-4. (09)

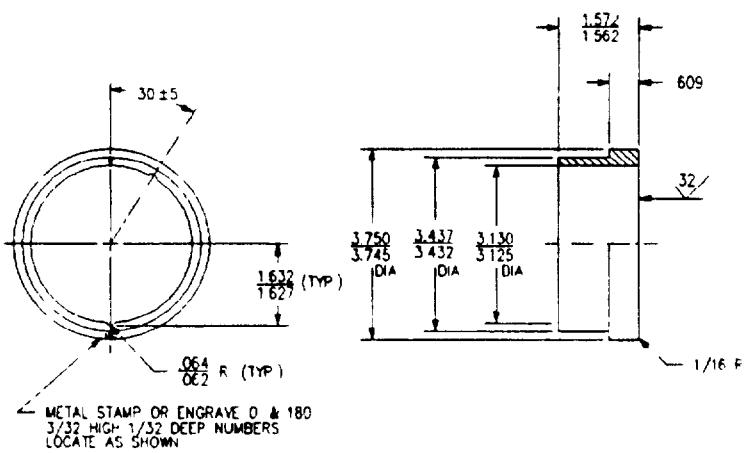
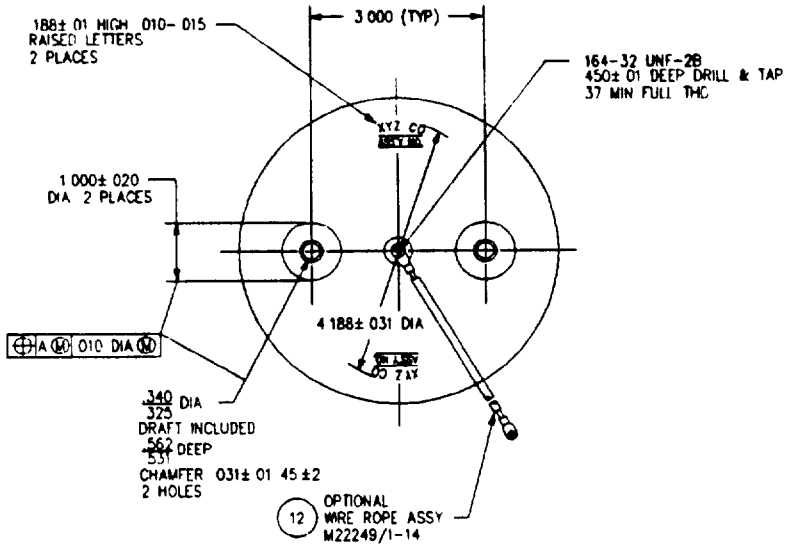


FIGURE 5. Polarizing bushing M22249/6-3 (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.



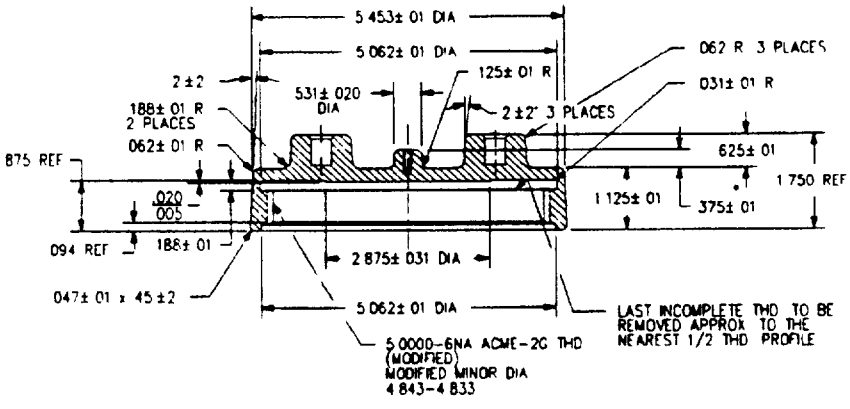


FIGURE 6 Protective cover M22249/6-5 (11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.

TABLE I Parts list.

Item No.[1]	Description[2]	Qty[3]	Material/ Specification	Remarks
01	Header assembly, 44-pin			Figure 1
02	Header body	1	CRES/Class 316 QQ-S-763	Figure 3
03	O-ring	1	MS28775-258	
04	Header insert assembly	1	CRES/Class 316L QQ-S-763 or ARMCO 22-13-5 AMS5764	Figure 2
05	O-ring	1	MS28775-240	
06	Ring, backup	2	MS27595-240	
07	O-ring	1	MS28775-238	
08	Bushing, polarizing	1	CRES/Class 316 QQ-S-763	Figure 5
09	Nut, jam	1	Manganese bronze Class A QQ-B-728	Figure 4
10	O-ring	2	MS28775-244	
11	Cover, protective	2	Aluminum Alloy QQ-A-591 Alloy A390 or 13 or SC114A	Figure 6
12[4]	Rope, wire, assembly	2	M22249/1-11	

[1]Item numbers are the same as shown on figures
[2]See applicable figure listed in remarks column for part numbers and dimensions
[3]Quantity is for one complete assembly of each size.
[4]Item 12, only when required by acquisition document

Revision letters are not used to denote changes due to the extensiveness of the changes

Preparing activity
Navy - SH
(Project 5935-N278-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:35Z
Check the source to verify that this is the current version before use.