MIL-N-22239C(AS)
Amendment-1
15 January 1970

MILITARY SPECIFICATION

NAVIGATIONAL SET, TACAN AN/ARN-52(V)

This amendment forms a part of Military Specification MIL-N-22239C(AS) dated 1 December 1967 and has been approved by the Naval Air Systems Command, Department of the Navy.

Page 3, paragraph 3.3.2.4: Add "RT-(*)/ARN-52(V)"

Page 16, paragraph 3.5.1: Delete and substitute

"3.5.1 Receiver-Transmitter - The RT-384/ARN-52(V), RT-(*)/ARN-52(V) and RT-893/ARN-52(V) receiver-transmitter units shall meet the following requirements."

Page 17, paragraph 3.5.1.2: Delete and substitute

"3.5.1.2 Form Factor - The form factor of the RT-893/ARN-52(V), RT-384/ARN-52(V) and RT-(*)/ARN-52(V) receiver-transmitters shall comply with Figures 1, 1A and 1B respectively."

Page 17, paragraph 3.5.1.3: Delete and substitute

"3.5.1.3 Weight - The weight of the receiver-transmitter shall not exceed 43.25 pounds, except that the RT-(*)/ARN-52(V) shall not exceed 46.25 pounds."

Page 21: Change paragraph number 3.5.1.8 to 3.5.1.7.1, and add

"3.5.1.8 Receiver-Transmitter - RT-(*)/ARN-52(V) shall be identical to RT-384/ARN-52(V) (paragraph 3.5.1) except as follows:

3.5.1.8.1 Contents - Receiver-transmitter RT-(*)/ARN-52(V) shall, in addition to modules of paragraph 3.5.1.4, contain the following:

(1) A basic module-supporting double-walled structure, containing a harness and acting as a cooling air plenum.

FSC 5826

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:31Z
Check the source to verify that this is the current version before use.

(2) A step-down transformer for 115/26 VAC instrument phase.

(3) A tone transformer to isolate the ground on the identifier output of the Range Decoder Module.

(4) Wiring and electronic components contained in Mount MT-1729/ARN-52(V).

(5) In addition to (1) through (4) above, components necessary to achieve interchangeability in form, fit and function (with additional capabilities) with the RT-471/ARN-65, and requiring no modifications to aircraft wiring or instrumentation."

Page 27: Add

"3.5.8 Mounting MT-2091/ARN-65(V) - A vibration and shock-absorbing mounting MT-2091/ARN-65(V) shall be provided for the RT-(*)/ARN-52(V) receiver-transmitter with a form factor as shown on figure 1B. Its loaded height shall not exceed 1.50 inches. The allowable sway space shall be as shown on figure 5C.

3.5.8.1 Weight - The weight of the MT-2091/ARN-65(V) mounting shall not exceed 2.25 pounds."

Page 39, paragraph 6.7: Add

" or

Receiver-Transmitter	RT-(*)/ARN-52(V)	3.5.1.8
or		
Mounting	MT-2091/ARN-65(V)	3.5.8"

Project Number 5826-N070

Preparing activity:
NAVY - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:31Z
Check the source to verify that this is the current version before use.

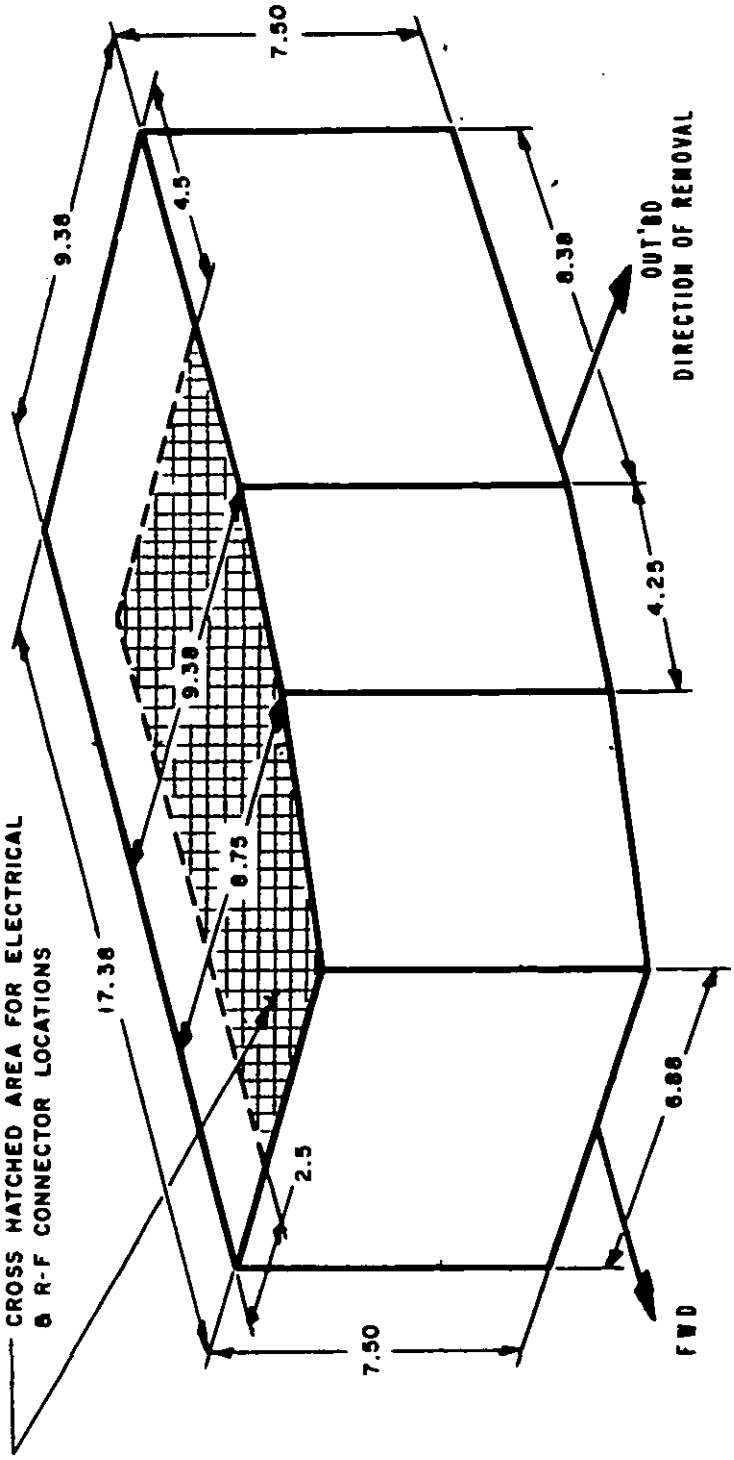


Figure 1B. Case for Receiver-Transmitter RT-(*)/ARN-52(V)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:31Z
Check the source to verify that this is the current version before use.

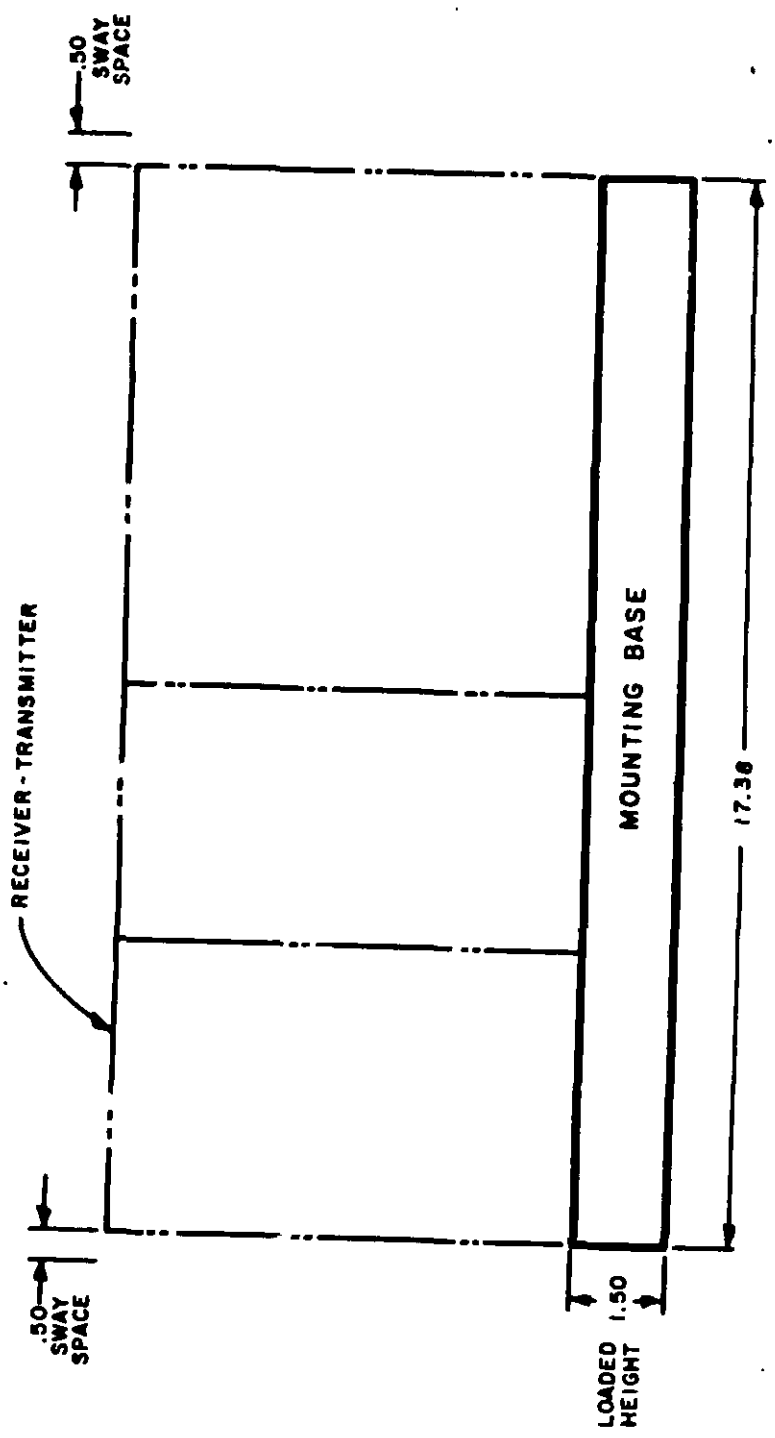


FIGURE 5C. Allowable Sway Space for Mounting MT-2091/ARN-65(V)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-094/5-4190

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:31Z
Check the source to verify that this is the current version before use.