METRIC


DOD-P-63464/4A
21 April 1982
SUPERSEDING
DOD-P-63464/4
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE, CORROSION-RESISTANT STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

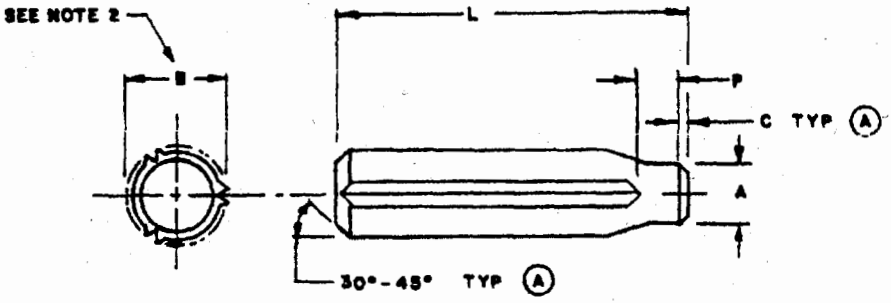

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO" and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL STRAIGHT GROOVE.

(A) denotes changes


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: CRES, 300 series.

2. Surface treatment: Cleaning and descaling.

3. Part number: Consists of the letter "D", the basic number of this specification sheet and a dash number taken from table I.

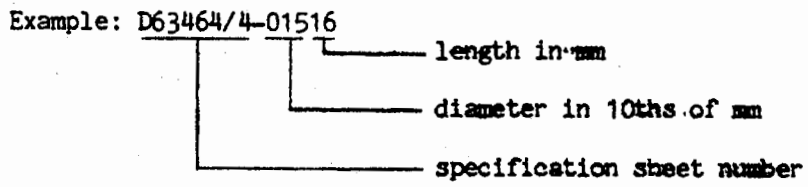

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use

TABLE I. Dash numbers and characteristics. (A)

Nom size		1.5		2		2.5		3		4		5		6		8		10		12	
A Dia	max	1.50		2.00		2.50		3.00		4.00		5.00		6.00		8.00		10.00		12.00	
	min	1.47		1.97		2.47		2.97		3.95		4.95		5.95		7.95		9.95		11.95	
Recm hole size	max	1.54		2.05		2.55		3.05		4.06		5.07		6.08		8.10		10.12		12.14	
	min	1.50		2.00		2.50		3.00		4.00		5.00		6.00		8.00		10.00		12.00	
C Chamfer max length		0.4								0.8						1.2					
P Pilot ±0.25 length		0.8								1.5						2.5					
L ±0.25 Length		Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05
6.00		01506	1.58	02006	2.10																
8.00		01508	1.58	02008	2.10	02508	2.65	03008	3.20												
10.00		01510	1.58	02010	2.10	02510	2.65	03010	3.20												
12.00		01512	1.58	02012	2.10	02512	2.65	03012	3.20	04012	4.20	05012	5.25								
16.00		01516	1.58	02016	2.10	02516	2.65	03016	3.20	04016	4.20	05016	5.25	06016	6.20	08016	8.30				
20.00				02020	2.05	02520	2.60	03020	3.15	04020	4.20	05020	5.25	06020	6.30	08020	8.30	10020	10.35		
26.00								03026	3.15	04026	4.15	05026	5.20	06026	6.20	08026	8.30	10026	10.35	12026	12.35
30.00								03030	3.15	04030	4.15	05030	5.20	06030	6.20	08030	8.25	10030	10.35	12030	12.35
40.00												05040	5.20	06040	6.15	08040	8.25	10040	10.35	12040	12.35
50.00														06050	6.15	08050	8.25	10050	10.30	12050	12.30
60.00																08060	8.25	10060	10.30	12060	12.30
70.00																08070		10070	10.30	12070	12.30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23
Check the source to verify that this is the current version b

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AT, EA
DLA - IS
NSA - NS

User activities:
Army - ME, MI
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0363)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.