INCH-POUND

A-A-59664C
19 April 2017
SUPERSEDING
A-A-59664B
15 May 2012

COMMERCIAL ITEM DESCRIPTION

CLEANING COMPOUND, WINDSHIELD (SOLVENT AND ANTI-FREEZE)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for cleaning compound to be used in vehicle windshield washing systems.

2. CLASSIFICATION. The cleaning compound shall be classified and identified by types and sizes specified. The selected type and size of product to be supplied shall be specified in the acquisition order (see 7.4(b)).

2.1 Type.

Type I - Ready-to-use
Type II - Concentrate

2.2 Size. See table I.

TABLE I. Product size.

Size code	Size/unit of issue
A	16-ounce
B	1-gallon
C	5-gallon
D	55-gallon

Comments, suggestions, or questions on this document should be addressed to DLA Aviation, VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil

AMSC N/A FSC 6850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Freezing.

3.1.1 Type I. A solution of one part cleaning compound and one-half part distilled water by volume shall be placed in a closed container, and the container with the solution shall be allowed to stand overnight in a freezer maintained at 0 ºF (-17.8 ºC). The solution shall remain liquid and show no evidence of freezing or formation of ice crystals.

3.1.2 Type II. A solution of one part cleaning compound and two parts distilled water by volume shall be placed in a closed container, and the container with the solution allowed to stand overnight in a freezer maintained at 0 ºF (-17.8 ºC). The solution shall remain liquid and show no evidence of freezing or formation of ice crystals.

3.2 Surface tension.

3.2.1 Type I. A solution of one part cleaning compound and seven and one-half parts distilled water shall have a surface tension between 30 and 37 dynes per centimeter.

3.2.2 Type II. A solution of one part cleaning compound and sixteen parts distilled water shall have a surface tension between 30 and 37 dynes per centimeter.

3.3 Insoluble matter. Insoluble matter shall not exceed 0.005 percent by weight of a test sample of cleaning compound.

3.3.1 Test method. Filter the contents of one 16-ounce container, which has been weighed to the nearest 0.1 gram into a beaker. Then re-weigh the empty container. The ashless filter paper containing the precipitate, if any, shall be washed with distilled water, then ignited, and the residue weighed to the nearest 0.0001 g (0.1 mg). The ignited residue shall be as specified in 3.3.

3.4 Deleterious action.

3.4.1 Type I. A solution of one part cleaning compound and one and one-half parts distilled water shall have no deleterious action on painted test panels.

3.4.2 Type II. A solution of one part cleaning compound and four parts distilled water shall have no deleterious action on painted test panels.

3.4.3 Test method. A solution prepared as in 3.4.1 or 3.4.2 shall be applied drop-wise to a painted test panel. The drops shall be allowed to dry, and the panel rinsed with tap water and wiped with a soft cloth. There shall be no evidence of spotting, pitting, or discoloration on the painted surface. A typical test panel is a 4 X 6 inch (or larger) sheet of cold rolled 20 gauge steel on which has been applied one coat of primer and a subsequent coat of enamel. The painted panels should be allowed to dry at least 48 hours prior to use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. The cleaning compound shall be a colorless or tinted transparent solution, free from foreign matter and miscible with water in all concentrations.

4. REGULATORY REQUIREMENTS

4.1 Safety data sheet (SDS). Manufacturers shall prepare and submit a SDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 CFR 1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

4.2 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4(c)).

7. NOTES

7.1 Sources of documents.

7.1.1 Government documents.

a. Copies of the CFR are available online at http://www.ecfr.gov.
b. Copies of the FAR are available online at http://www.acquisition.gov.
c. Copies of Federal Standards are available online at http://quicksearch.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.

7.2 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

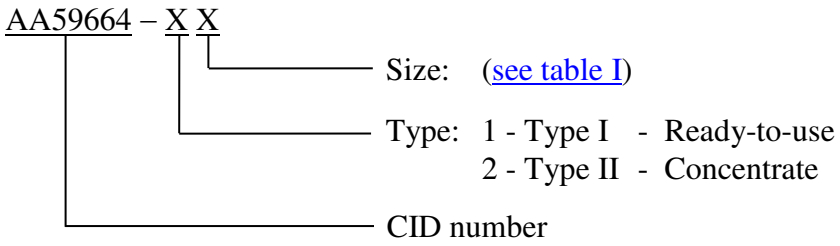

7.3 National stock number (NSN). The NSNs listed below are assigned for the listed product types and sizes (see table I). Other NSNs may also correspond with this document.

NSN	Type	Size
6850-00-926-2275	II	A
6850-01-347-0073	I	B
6850-01-368-4799	I	C
6850-01-368-5489	I	D

7.4 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Product classification type (see 2.1) and size (see 2.2)
c. Preservation, packing, and marking requirements (see 6.1)

7.5 Subject term (key word) listing.

concentrate
washing

MILITARY INTERESTS:

CIVIL AGENCY
COORDINATING ACTIVITY:
GSA - FAS

Custodian:

DLA-GS

Preparing activity:
DLA - GS3

(Project 6850-2017-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:23Z
Check the source to verify that this is the current version before use.