USER ACTIVITIES:
NAVY - MC, OS, SH

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
9540

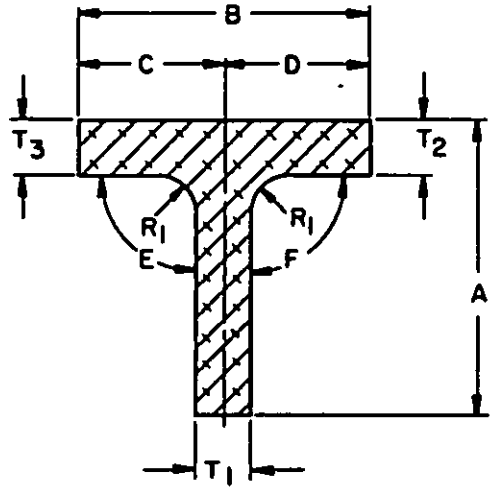

TABLE I. DASH NUMBERS.

DASH NO	A	B	C	D	E	F	T_1	T_2	T_3	R_1	TEMPER
001	1.038	2.000	.986	1.014	72.7°	107.3°	.094	.094	.094	.094	T6
003	1.100	2.000	1.000	1.000	90°	90°	.050	.050	.050	.125	T6511
005	1.500	4.000	2.000	2.000	90°	90°	.062	.062	.062	.094	T6
007	1.750	2.370	1.075	1.295	90°	90°	.050	.050	.050	.062	T6
009	2.580	2.350	1.121	1.229	90°	90°	.062	.062	.062	.130	T6

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 7178, (UNS A97178) AS SPECIFIED IN QQ-A-200/13.
2. FORMING PROCESS. EXTRUDED (CODE E).
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14378E001

- DASH NUMBER FROM TABLE I
- EXTRUDED (SEE REQUIREMENT 2)
- BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-184 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF TEE IS 10' MINIMUM, 12' MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 22 May 1984 REVISED

P. A.		INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	AS MR 99		TEE, STYLE I ALUMINUM ALLOY 7178	MS14378
PROCUREMENT SPECIFICATION QQ-A-200		SUPERSEDES		PAGE 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9540-0109

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.