
MILITARY SPECIFICATION SHEET

LINE ASSEMBLY, RADIO FREQUENCY TRANSMISSION
3-1/8 INCH STRAIGHT FLEXIBLE SECTIONS, FLANGED

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the line assembly described herein shall consist of this document and the latest issue of Specification MIL-L-28796

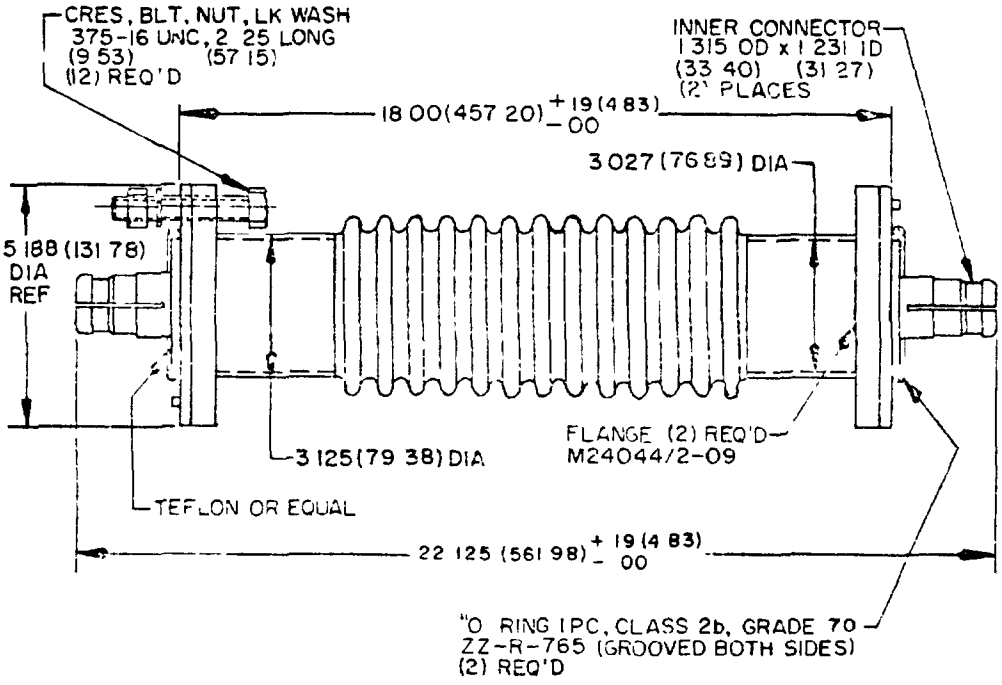


NOTES
1 Dimensions are in inches
2 Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
3. Metric equivalents are in parentheses

FIGURE 1. Line assembly

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:53Z
Check the source to verify that this is the current version before use.

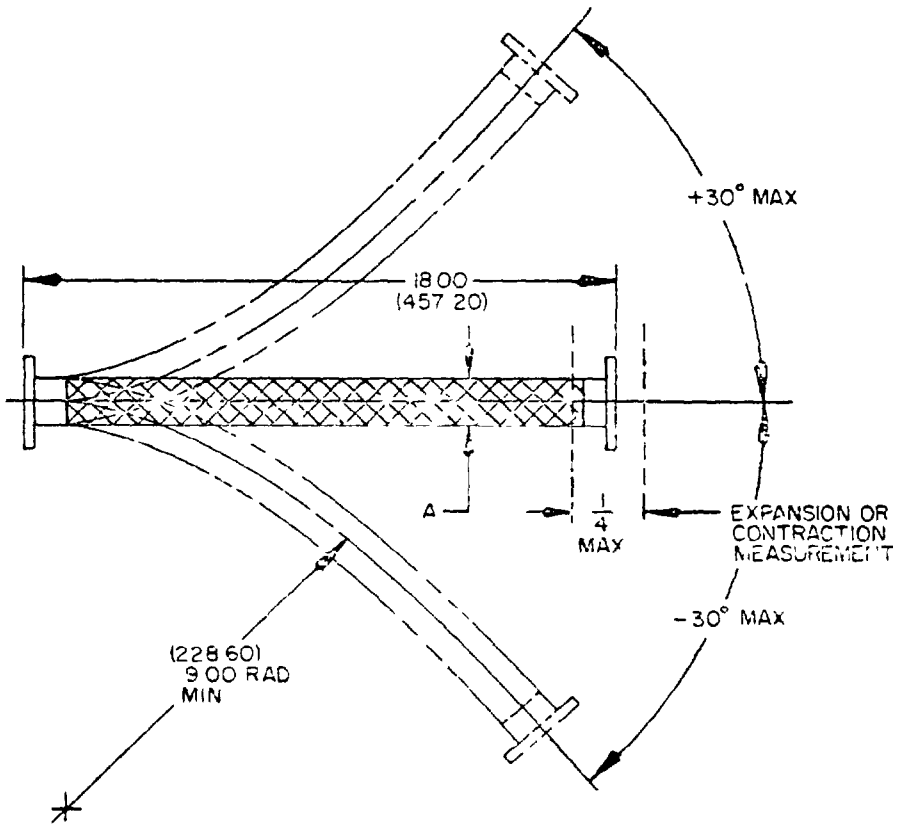

NOTES
1 Dimensions are in inches
2 Metric equivalents (to the nearest 0.1 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3 Metric equivalents are in parentheses
4 One cycle shall consist of starting with the line assembly straight, bend 30° and return through 0° to 30° in the opposite direction, then return to straight again

FIGURE 2 Bend test

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Operating frequency range 0 to 1,700 MHz

Weight 12 750 pounds, maximum

Offset alinement 1/2 inch maximum

Transmission line
  Material - Copper alloy

Insertion loss 0 01 dB maximum

VSWR 1 04 maximum at 500 MHz and below
  1 06 maximum at 500 to 1,000 MHz
  1 1 maximum at 1,000 to 1,700 MHz

Impedance 50 ±0 3 ohms

Velocity of propagation 99 7 percent minimum

Dielectric withstanding voltage 11 5 kV, 60 Hz

Pressurization
  Operating - 30 ±2 lb_f/in^2G

1/ Bend Mount the line assemblies in a suitable test fixture and flex over a ·30° range at 28 strokes per minute for 1,500 cycles The expansion and contraction shall be measured, see figure 2

RF power handling capability
  Average - 1 53 kilowatts minimum
  Peak - 140 kilowatts minimum

Part number M28796/8-001

1/ First article, group I, and group A inspection

Review activities
  Navy - SH, OS

User activities
  Navy - MC, AS

Preparing activity
  Navy - EC

Agent
  DSA - ES

(Project 5985-N421-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:53Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:53Z
Check the source to verify that this is the current version before use.