INCH-POUND

MIL-DTL-83723/70B
29 June 2009
SUPERSEDING
MIL-C-83723/70A (USAF)
17 December 1991

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE ADAPTER (PUSH-PULL), QUICK-DISCONNECT, SERIES III, CLASSES A, G, M, R, T, W AND Z

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

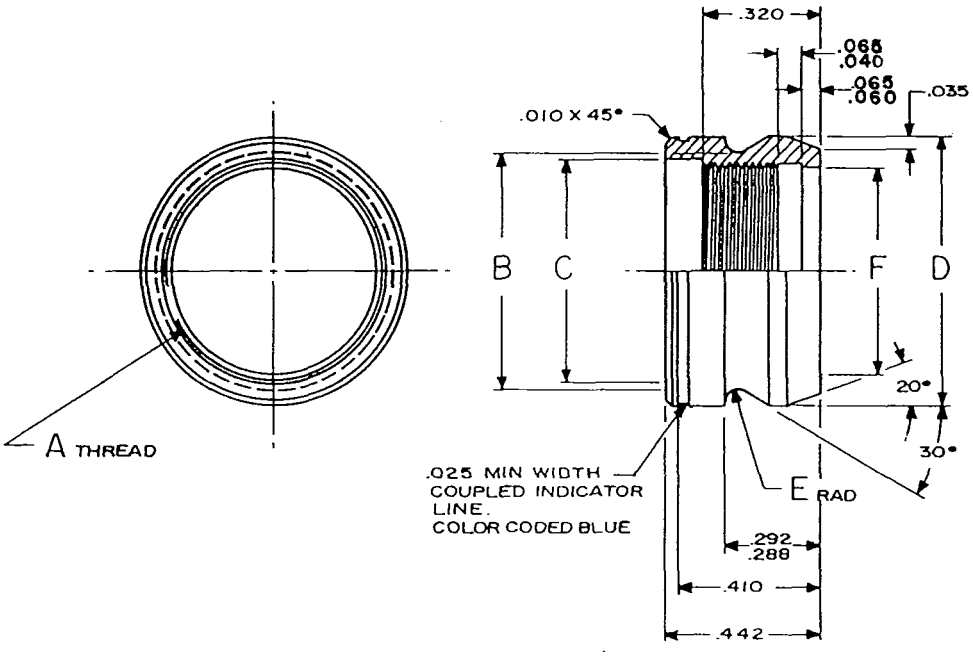


FIGURE 1. Receptacle, adapter, dimensions and configuration.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.010	.25	.060	1.52	.320	8.13
.025	.64	.065	1.65	.410	10.41
.035	.89	.288	7.32	.442	11.23
.040	1.02	.292	7.42		

Shell size	A UNEF-2B coupling thread	B dia	C dia	D dia	E	F dia
8	.5625-24	.607 (15.42) .603 (15.32)	.579 (14.71) .575 (14.61)	.689 (17.50) .685 (17.40)	.036 (0.91) .031 (0.79)	.525 (13.34)
10	.6875-24	.732 (18.59) .728 (18.49)	.714 (18.14) .710 (18.03)	.814 (20.68) .810 (20.57)	.036 (0.91) .031 (0.79)	.650 (16.51)
12	.875-20	.919 (23.34) .915 (23.24)	.894 (22.71) .890 (22.61)	1.001 (25.43) .997 (25.32)	.036 (0.91) .031 (0.79)	.840 (21.34)
14	.9375-20	.982 (24.94) .978 (24.84)	.954 (24.23) .950 (24.13)	1.064 (27.03) 1.060 (26.92)	.036 (0.91) .031 (0.79)	.900 (22.86)
16	1.0625-18	1.107 (28.12) 1.103 (28.02)	1.079 (27.41) 1.075 (27.31)	1.189 (30.20) 1.185 (30.10)	.036 (0.91) .031 (0.79)	1.025 (26.04)
18	1.1875-18	1.232 (31.29) 1.228 (31.19)	1.204 (30.58) 1.200 (30.48)	1.330 (33.78) 1.326 (33.68)	.044 (1.12) .039 (0.99)	1.150 (29.21)
20	1.3125-18	1.357 (34.47) 1.353 (34.37)	1.329 (33.76) 1.325 (33.66)	1.455 (36.96) 1.451 (36.86)	.044 (1.12) .039 (0.99)	1.275 (32.39)
22	1.4375-18	1.482 (37.64) 1.478 (37.54)	1.454 (36.93) 1.450 (36.83)	1.580 (40.13) 1.576 (40.03)	.044 (1.12) .039 (0.99)	1.400 (35.56)
24	1.5625-18	1.607 (40.82) 1.603 (40.72)	1.579 (40.11) 1.575 (40.01)	1.705 (43.31) 1.701 (43.21)	.044 (1.12) .039 (0.99)	1.525 (38.74)

NOTES:
1. Dimensions are in inches. Dimensions apply after plating.
2. Metric equivalents are given for information only. Metric equivalents are in parentheses.
3. Unless otherwise specified, tolerances shall be ± .005 (0.13) for three place decimal places, ± .01 (0.25) for two place decimal places and ± 1/2° for all angles.
4. Coupling indicator line shall be color coded blue .025 ± .010 (0.64 ± 0.25) wide.

FIGURE 1. Receptacle, adapter, dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangement, see MIL-STD-1554.

For connector accessories, see SAE-AS85049.

This adapter is intended to be used with series III threaded coupling receptacles, including MIL-DTL-83723/82, MIL-DTL-83723/83, MIL-DTL-83723/84, MIL-DTL-83723/85, MIL-DTL-83723/88, MIL-DTL-83723/89 and MIL-DTL-83723/90.

This adapter shall be secured permanently to the receptacle, using a compatible thread seizing compound.

The adapter and receptacle mate with applicable quick-disconnect plugs, including MIL-DTL-83723/66 through MIL-DTL-83723/69 (pin or socket).

Materials:


Aluminum alloy.

Qualification:

Examination of product.
Coupling torque.
Salt spray (corrosion).
Coupling torque.

Marking:

Part or Identifying Number (PIN) example:

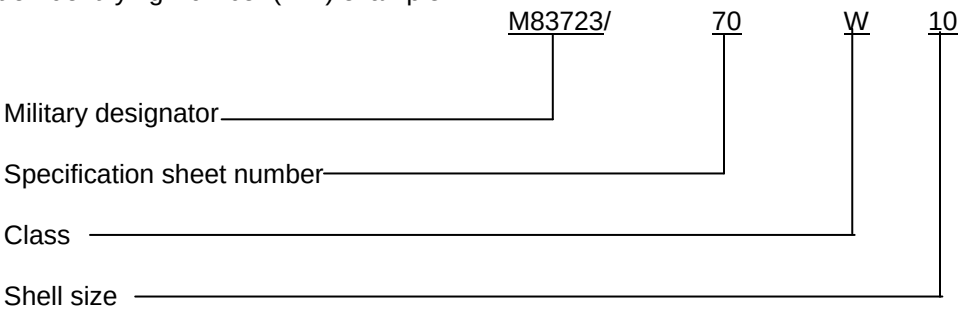

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-STD-1554
MIL-DTL-83723/66
MIL-DTL-83723/67
MIL-DTL-83723/68
MIL-DTL-83723/69
MIL-DTL-83723/82
MIL-DTL-83723/83
MIL-DTL-83723/84
MIL-DTL-83723/85
MIL-DTL-83723/88
MIL-DTL-83723/89
MIL-DTL-83723/90
SAE-AS85049

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2008-106)

Review activities:
Air Force – 70, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.