GGG-C-135a
October 25, 1966

SUPERSEDING
Int. Fed. Spec. GGG-C-00135 (GSA-FSS)
December 20, 1963

FEDERAL SPECIFICATION

# CALKING TOOLS, HAND

*This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. The calking tools covered by this specification are for water or gas main and general use.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Type.* The calking tools covered by this specification shall be of one type and of the following classes and styles (see 6.2):

Class 1—Water or gas main calking tool.
  Style 1—Offset, square end.

Class 2—General use calking tools.
  Style 1—Offset, curved nose, inside.
  Style 2—Offset, square end.
  Style 3—Offset, inside.
  Style 5—Bent, outside.
  Style 6—Offset, outside.

## 2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

*Federal Standards:*

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications and Standards from established distribution points in their agencies.)

*Military Specification:*

MIL-H-15424—Hand Tools; Packaging of.

*Military Standards:*

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Material. The calking tools shall be made from hexagon or octagon bar stock of a high carbon steel which will assure high performance tools.

3.2 Hardness. The hardness of the work-



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

ing edge and for a distance of 1/4 inch therefrom shall be as specified in 3.6 and 3.7. The other end of the tools shall have a hardness of Rockwell C-20-40 (see 4.4.1).

**3.3 Identification marking.** Each calking tool shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

**3.4 Finish.** The calking tools shall be smoothly finished in accordance with good commercial practices.

**3.5 Illustrations.** The illustrations shown herein are for the convenience of identification, and are not intended to preclude the purchase of calking tools which are otherwise in accordance with this specification.

**3.6 Water or gas main calking tools.** Each class 1, style 1 calking tool shall comply with the requirements of table I and also shall be in substantial agreement with figure 1. The blade shall have a minimum offset of 10° with the centerline of the shank. Hardness of the working edge shall be Rockwell C-20-30. (See 3.2.)

TABLE I.

| Size | A Stock ± 1/8 | B Overall length ± 1 | W Width of blade ± 1/8 | T Thickness of tip ± 1/32 |
|---|---|---|---|---|
| | *Inch* | *Inches* | *Inch* | *Inch* |
| 1 | 3/4 | 7-1/2 | 7/8 | 1/8 |
| 2 | 3/4 | 7-1/2 | 7/8 | 1/4 |
| 3 | 3/4 | 7-1/2 | 7/8 | 3/8 |
| 4 | 3/4 | 7-1/2 | 7/8 | 1/2 |
| 5 | 3/4 | 7-1/2 | 7/8 | 5/8 |

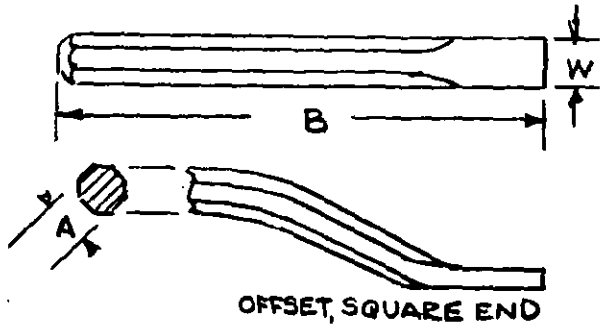



FIGURE 1. Class 1, style 1, water or gas main calking tool.

**3.7 General use calking tools.** Each class 2 calking tool shall comply with the requirements of table II for style and also shall be in substantial agreement with the figure for that style as shown in figures 2 to 6, inclusive. Offset type tools shall have a minimum offset of 5/8 inch between blade and shank. Hardness of the working edge shall be Rockwell C-42-57. (See 3.2.)

TABLE II.

| Style | A Stock ± 1/8 | B Overall length ± 3/4 | W Width of nose end ± 1/8 |
|---|---|---|---|
| | *Inch* | *Inches* | *Inch* |
| 1 | 5/8 | 8 | 1-1/2 |
| 2 | 5/8 | 6-1/2 | 5/8 |
| 3 | 5/8 | 7-1/4 | 3/4 |
| 5, size 1 | 5/8 | 4-1/2 | 5/8 |
| 5, size 2 | 5/8 | 7 | 5/8 |
| 6 | 5/8 | 7-1/4 | 3/4 |

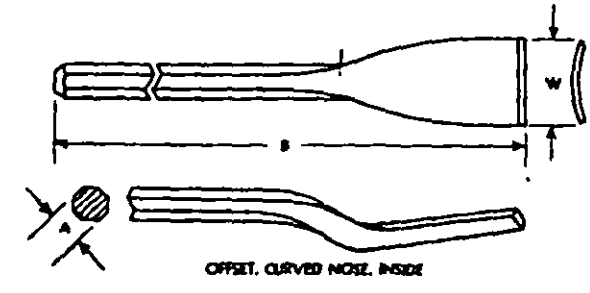



FIGURE 2. Class 2, style 1, general use calking tool.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

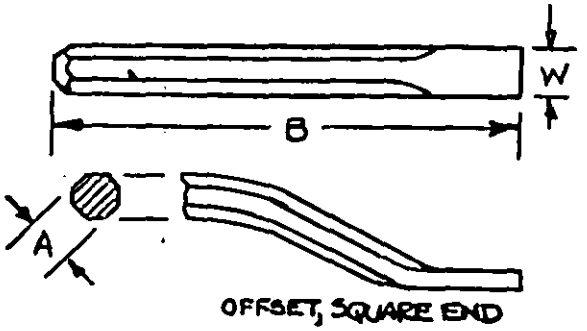



FIGURE 3. Class 2, style 2, general use calking tool.

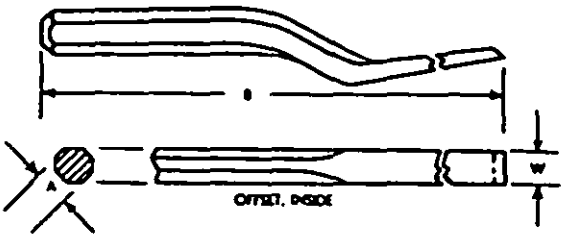



FIGURE 4. Class 2, style 3, general use calking tool.

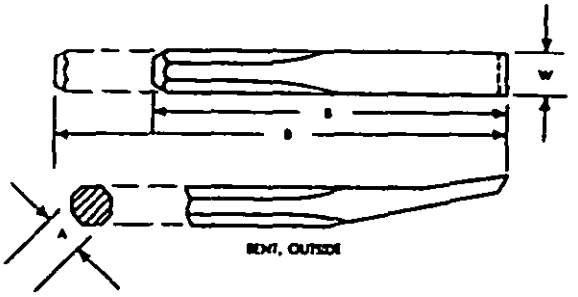



FIGURE 5. Class 2, style 5, general use calking tool.

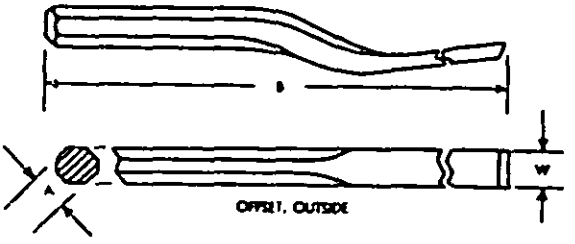



FIGURE 6. Class 2, style 6, general use calking tool.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table III.

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 *Hardness test.* Each sample unit shall be tested for hardness in accordance with method 243.1 of Fed. Test Method Std. No. 151. (See 3.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

TABLE III.

| Category | Sample unit | Inspection level | Acceptable quality level | AQL expressed in terms of | Reference |
|---|---|---|---|---|---|
| Visual examination | 1 ea. | II | 6.5 | Defects per hundred units | 4.3.1 |
| Dimensional examination | 1 ea. | S-4 | 1.5 | Defects per hundred units | 4.3.2 |
| Testing | 1 ea. | S-3 | 1.0 | Percent defective | 4.4.1 |
| Preparation for delivery | One container | S-2 | 4.0 | Defects per hundred units | 4.5 |

**4.5 Inspection of preparation for delivery requirements.** An inspection shall be made to determine that the packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored in accordance with table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE IV. *Classification of preparation for delivery defects*

| Examine | Defects |
|---|---|
| Markings (exterior and interior) | Omitted; incorrect; illegible; improper size, location, sequence, or method of application. |
| Materials | Any component missing or damaged. |
| Workmanship | Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container. |

## 5. PREPARATION FOR DELIVERY

**5.1 Preservation, packaging, packing, and marking.** Unless otherwise specified (see 6.2), the tools shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing, A, B, or C, as specified (see 6.2).

5.1.1 As part of the requirements of section 5 of this specification, table V is considered as part of and used in lieu of that portion of table I of MIL-H-15424 covering calking tools.

**5.2 Marking.**

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

## 6. NOTES

**6.1 Intended use.** The calking tools are for the application of calking materials such as lead or fiber. The class 1 calking tools are for water or gas main use, and the class 2 calking tools are for plumber's and general use.

**6.2 Ordering data.** Purchasers should select the preferred options permitted herein

TABLE V.

| Col. 1 | Col. 2 | Col. 3 | Col. 4 | Col. 5 | Col. 7 |
|---|---|---|---|---|---|
| Calking tool, hand: | | | | | |
| Through 1-inch blade width | P-1 | I | 6 | 8 | 48 |
| Over 1-inch blade width | Do | I | 3 | 12 | 36 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

and include the following information in procurement documents:

(*a*) Title, number, and date of this specification.

(*b*) Class, style, and size of each calking tool (see 3.6, 3.7, and applicable tables and figures).

(*c*) Selection of applicable levels of packaging and packing required (see 5.1).

(*d*) Marking, if different (see 5.2).

DOD coordination has been waived.

*Preparing Activity:*
GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.