
FED. SUP CLASS
4730

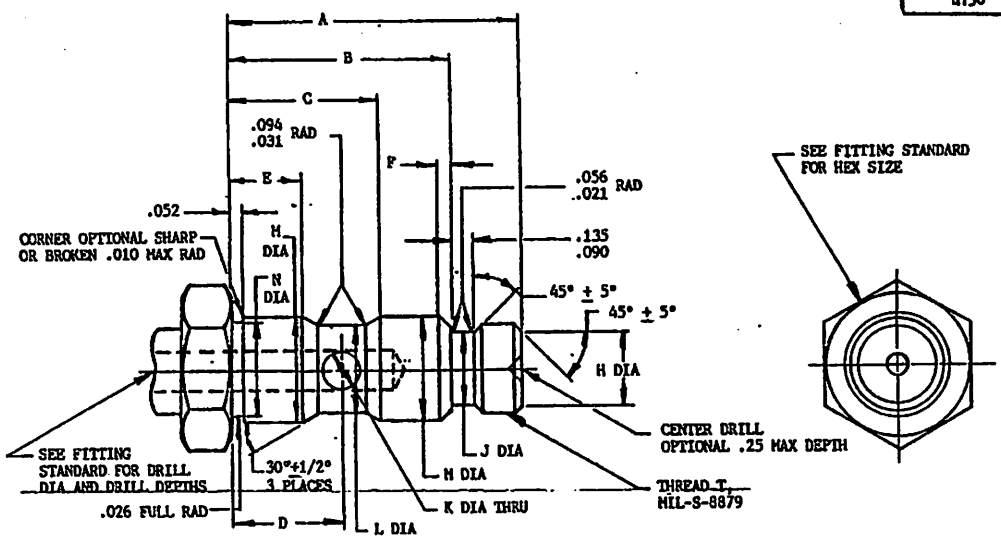

DESIGN STANDARD

Ⓒ

SIZE	THREAD T MIL-S-8879	A ±.031	B	C	D	E	F	H ±.005	J ±.005	K ±.003	L ±.005	M ±.0004	N
LOW FLOW	.4375-20 UNJF-3A	1.438	1.087	.726	.540	.354	.060	.365	.363	.189	.433	.4989	.425
HIGH FLOW	.5625-18 UNJF-3A	1.688	1.274	.891	.634	.377	.065	.480	.480	.300	.740	.8114	.738

1. ALL OUTSIDE MACHINED SURFACES FINISHED TO 125 RHR MAX, EXCEPT AS NOTED.
2. ALL INSIDE MACHINED SURFACES FINISHED TO 250 RHR MAX, EXCEPT AS NOTED.
3. M MACHINED SURFACES FINISHED TO 16 RHR MAX AND CONCENTRIC TO EACH OTHER WITHIN .0005 TIR.
4. Ⓒ SURFACE FINISH IN ACCORDANCE WITH ANSI B46.1.
5. L AND M DIA AND THREAD T MUST BE CONCENTRIC WITHIN .005 TIR.
6. FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
8. Ⓒ IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
9. Ⓒ ~~REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF~~ DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
10. CERTAIN PROVISIONS (SCREW THREADS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
11. Ⓒ THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

Ⓒ INACTIVE FOR NEW DESIGN AFTER 31 DEC 1987

Ⓒ DENOTES CHANGES

APPROVED 15 Feb 56 REVISED (A) 20 Nov 57 (B) 27 June 69 (C) 27 JULY 87

USER SYMBOLS: ARMY - GL, CR, ME, A

REVIEWER SYMBOLS: NAVY - AS, USAF - 82, ARMY - AV, DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft clarification should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED. This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for retrofitting uses shall be made from this document.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Navy-AS Other Cust USAF-99 Army-AV	SEE NOTE 10.	FITTING END, BOLT CLUSTER FITTING, SINGLE PORT	MS21932
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES: MS21932 (ASG) Ⓒ		SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. — PROJECT NO. 4730-0978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.