FED SUP CLASS
5935

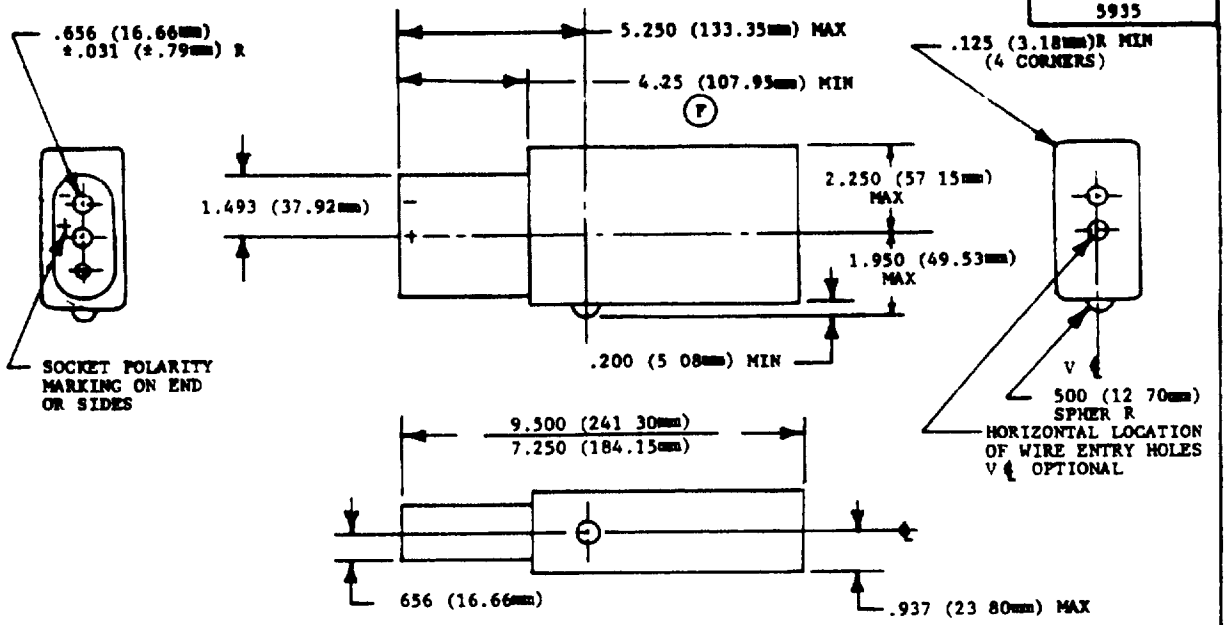


TABLE I		
PART NO	WIRE SIZE	SUPERSEDES
MS25488-25 MS25488-26 MS25488-27	0 00 0000	MS25488-2 MS25488-3 MS25488-1,-4




TABLE II				
WIRE SIZE	E DIA		F DIA	
	MAXIMUM	MINIMUM	MAXIMUM	MINIMUM
0	.578 (14.68mm)	.558 (14.17mm)	458 (11.63mm)	.438 (11.13mm)
00	.640 (16.26mm)	620 (15.75mm)	520 (13.21mm)	500 (12.70mm)
0000	.780 (19.81mm)	.760 (19.30mm)	.645 (16.38mm)	.622 (15.80mm)

NOTES

1. MATERIAL: SEE PROCUREMENT SPECIFICATION
2. MOLD OR STAMP WIRE SIZE ON CRIMP BARREL
3. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± 025 (±0.64mm)
4. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINES
5. THE SMALLER SOCKET SHALL BE CONNECTED TO THE "PLUS" LARGER SOCKET WITHIN THE PLUG, BY A COPPER OR BRASS JUMPER HAVING A CROSS SECTIONAL AREA OF AT LEAST 6530 CIRCULAR MILS.
6. EACH PLUG WHEN MATED WITH MS3506-1 RECEPTACLE, SHALL MEET ALL THE REQUIREMENTS OF THE PROCUREMENT SPECIFICATION.
7. SOCKET CONTACT CRIMP BARREL ENDS SHALL BE DESIGNED SO THAT THE PLUG MAY BE ATTACHED TO CABLES USING CRIMPING TOOLS SPECIFIED IN MS20659.
8. ONLY NONCORROSIVE HARDWARE SHALL BE USED IN THE MANUFACTURE OF THE PLUG

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS

(F) DENOTES CHANGES

P A NAVY - AS Other Cust ARMY - EL USAF - 11	TITLE CONNECTOR PLUG, ATTACHABLE EXTERNAL ELECTRIC POWER, AIRCRAFT 28 VOLT DC OPERATING POWER	MILITARY STANDARD MS25488
PROCUREMENT SPECIFICATION MIL-C-7974	SUPERSEDES SEE TABLE I	SHEET 1 OF 1

DD FORM MAR 72 672-1 (Coordinated)

PLATE NO 23054

REVIEWER SYMBOLS: USAF - 80,82 ARMY - AV
USER BY: ARMY - AT NAVY - ME,SH

"Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 29 APR 60 REVISED (E) 21 AUG 75 (F) 2 MAR 80

U S GOVERNMENT PRINTING OFFICE 1980—603 121 1573

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:11Z
Check the source to verify that this is the current version before use.