
FED. SUP CLASS
6645

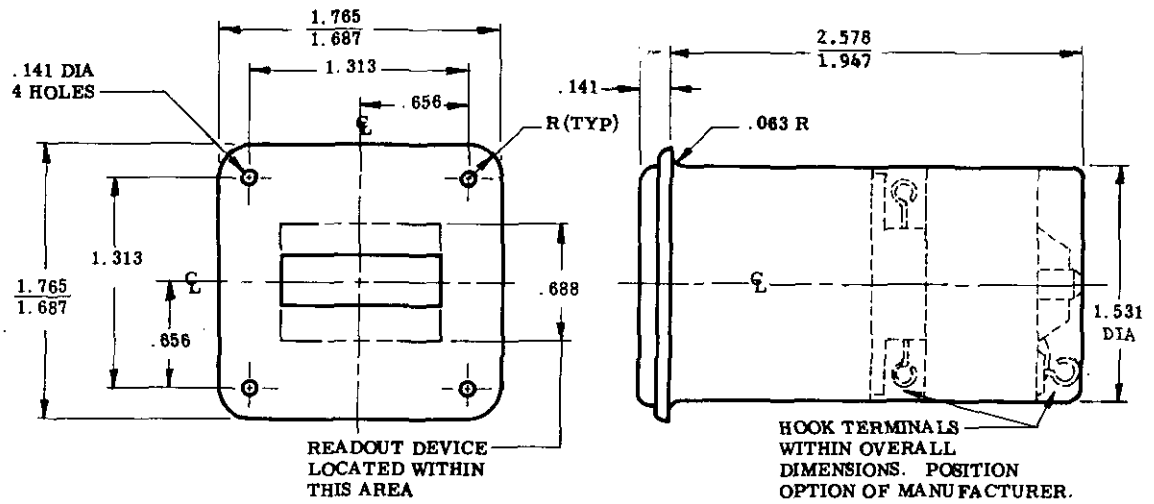

DASH NO.	*TYPE
-6	WITH FLANGE

* TOTAL READOUT SHALL BE 9999.9 HOURS

NOTES:

1. ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ± .015.
2. POWER CONSUMPTION AT NOMINAL VOLTAGE AND FREQUENCY SHALL NOT EXCEED 3.0 WATTS
3. WEIGHT SHALL NOT EXCEED 7 OUNCES.
4. SINCE RECTANGULAR UNITS ARE INTERCHANGEABLE WITH ROUND UNITS, THE MOUNTING HOLE MUST BE 1.657 INCHES IN DIAMETER. THIS DIMENSION SHALL BE CONSIDERED THE MAXIMUM DISTANCE BETWEEN TWO DIAGONALLY OPPOSITE CORNERS OF THE RECTANGULAR ENCLOSURE. METERS HAVING A SMALLER CROSS-SECTION MAY BE OFFERED FOR QUALIFICATION. USERS ARE CAUTIONED TO LEAVE SUFFICIENT SPACE TO ACCEPT REGULAR SIZE METERS FOR REPLACEMENT PURPOSES.
5. THIS STANDARD ESTABLISHES THE OVERALL DIMENSIONS AND DETAIL ENGINEERING REQUIREMENTS FOR REGULAR SIZE METERS. THE ITEM COVERED HEREON IS STANDARD FOR USE IN THE DESIGN OF NEW EQUIPMENT PROCURED BY THE ARMY, NAVY, AND AIR FORCE.
6. USERS OF THESE METERS ARE REQUESTED TO REPORT INSTANCES WHERE SPECIFIED QUALITY HAS NOT BEEN MAINTAINED TO COMMANDER, NAVAL AIR SYSTEMS COMMAND, WASHINGTON, D.C. 20360.

(G) CANCELLED AFTER 29 JULY 1983 SUPERSEDED BY M7793/9

(F) 1 THRU-5 INACTIVE FOR NEW DESIGN AFTER 31 DEC 1969 SUPERSEDED BY AND INTERCHANGEABLE WITH -6 AS APPLICABLE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) ENTIRE STANDARD REVISED AND REDRAWN (G) DENOTES CHANGES

P.A. NAVY - AS Other Cust USAF-11 ARMY-MU	TITLE METER, TIME TOTALIZING DIGITAL, 115 VOLTS, 400 HERTZ	MILITARY STANDARD MS28053
PROCUREMENT SPECIFICATION MIL-M-7793	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 6

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/3935

APPROVED 1 FEB 1956 REVISED (F) 31 DEC 1969 (G) 29 JULY 1983

USER SYMBOLS: ARMY-GL, NAVY - SH

REVIEWER SYMBOLS: USAF-8211, NAVY-OS, AS, ARMY-AV, WC, EL

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.