
THIS STANDARD HAS BEEN APPROVED BY THE ORD CORPS, DEPARTMENT OF THE ARMY AND IS MANDATORY FOR USE BY THAT ACTIVITY. ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE

FED SUP CLASS 5990

(B) CANCELLED AFTER 31 MAY 1968 USE APPROPRIATE TYPE DESIGNATION OF SPEC. MIL-R-14346(MU)

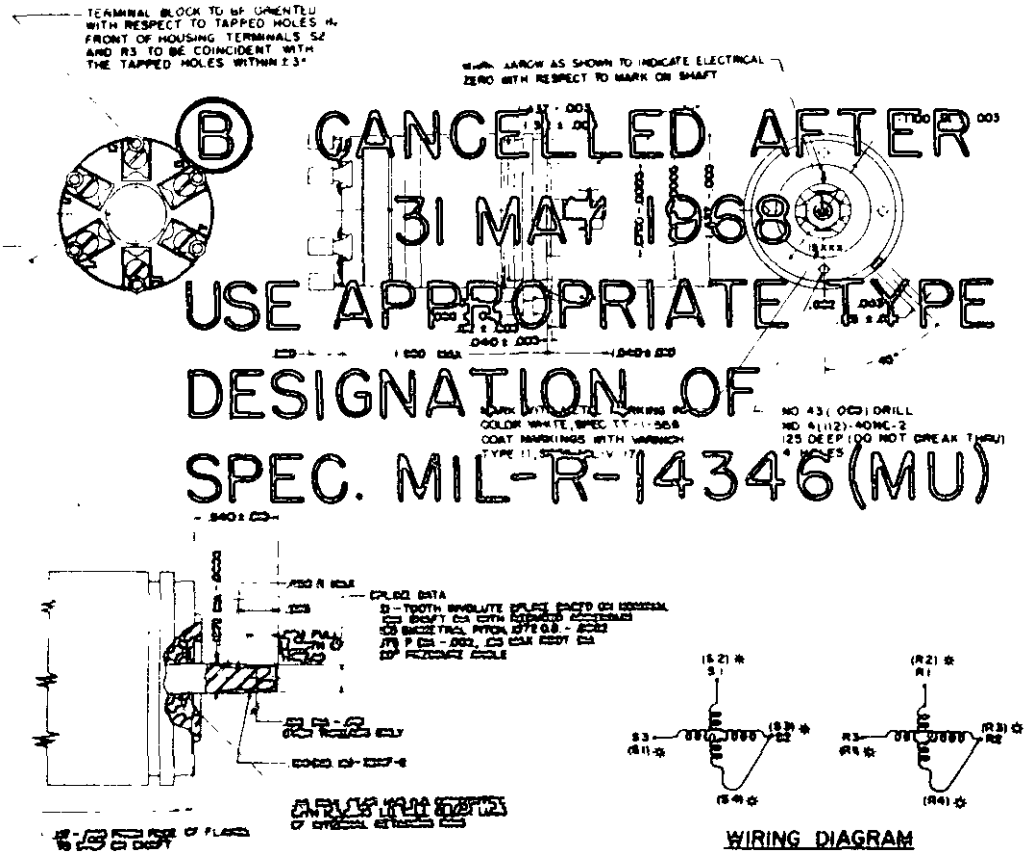

SEE SHEET 2

NOTES:

1. DIAMETERS MARKED "Y" MUST BE CONCENTRIC TO ROTOR SHAFT WITHIN .001 TOTAL INDICATOR READING, INDICATOR MOUNTED ON SHAFT.
2. ECCENTRICITY OF SHAFT DIAMETER (SMOOTH PORTION) SHALL NOT EXCEED .001 TIR WHEN SHAFT IS ROTATED IN BEARINGS.
3. DIMENSIONS ARE IN INCHES.
4. TOLERANCES, WHEN NOT SPECIFIED, ARE ± .005 ON DECIMALS, ± 1/64 ON FRACTIONS, AND ± 1° ON ANGLES
5. MATERIALS, PROTECTIVE FINISHES AND OTHER DESIGN REQUIREMENTS ARE SPECIFIED ON REFERENCED ORDNANCE DRAWINGS.
6. SURFACES MARKED "X" TO BE PERPENDICULAR TO CENTER LINE WITHIN .001 TOTAL INDICATOR READING.

MS PART NO.	FSIN	TYPE	ORD DRAWING
MS 51075 -1	7985-1294	15R7N4	FTOS1264

(A) For changes see sheet 2

NOTE: REFERENCE DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN

APPROVED 20 June 58 REVISED (A) 27 May 60 (B) 31 May 68

CUSTODIAN	OTHER INT.
ORD	A- Des C B- C-

MILITARY STANDARD
RESOLVER, ELECTRICAL, SIZE 15
TYPE 15R7N4

MS 51075 (ORD)

PROCUREMENT SPECIFICATION	SUPERSEDES:
MIL-R-14346 (ORD)	

SHEET 1 OF 2

DD FORM 1 OCT 61 672-1

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-301-520/6168

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:57Z
Check the source to verify that this is the current version before use.