
MILITARY SPECIFICATION SHEET

ATTENUATORS, FIXED, COAXIAL LINE (SERIES N),

FREQUENCY RANGE: 0.4 TO 18 GHz, CLASS IV, LOW POWER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the attenuators described herein shall consist of this specification and the latest issue MIL-A-3933.

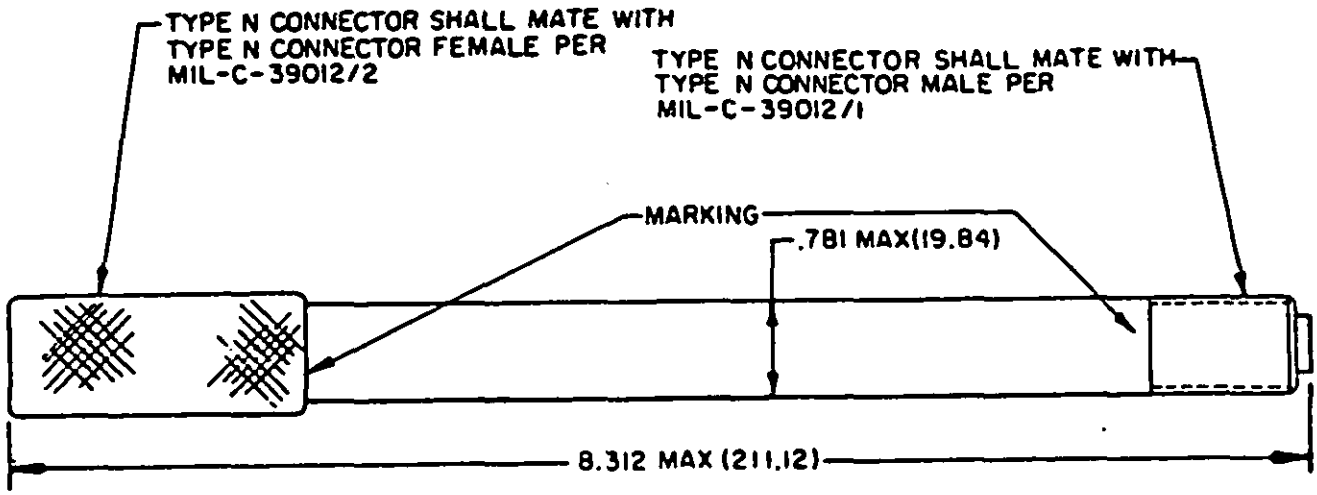

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration.

ENGINEERING DATA:

Class IV.

Operating frequency range: 0.4 to 18 gigahertz (GHz).

Test frequencies for VSWR and attenuation measurements: 1, 4, 10 and 18 GHz for dash numbers 01 thru 10, and 2, 4, 10, and 18 GHz for dash number 11.

Basic test frequency: 4.0 GHz.

Operating temperature range: -55°C to +95°C.

Maximum weight: 7 ounces.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:33Z
Check the source to verify that this is the current version before use.

FSC 5985

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Nominal impedance: 50 ohms.

Attenuation: See table I.

Power: See table I.

VSWR: See table I.

Part number: M3933/26- (and dash number from table I).

TABLE I. Electrical characteristics.

Dash number	Frequency range GHz	Attenuation dB		Minimum power input		VSWR Maximum
		Nominal	Deviation 2/	AV (W) continuously	Peak 1/ (kW)	
01 N S	0.4 to 18	1	±0.1	5	10	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
02 N S	0.5 to 18	2	±0.1	5	10	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
03 N S	0.6 to 18	3	±0.1	5	10	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
04 N S	1.0 to 18	4	±0.1	4	8	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
05 N S	1.0 to 18	5	±0.1	3	6	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
06 N S	1.0 to 18	6	±0.1	3	6	1.35:1 (2 to 3 GHz) 1.50:1 (12.4 to 18 GHz)
07 N S	1.0 to 18	7	±0.1	2.5	5	1.35:1 (1 to 2 GHz) 1.50:1 (12.4 to 18 GHz)
08 N S	1.0 to 18	8	±0.1	1	1	1.35:1 (1 to 2 GHz) 1.50:1 (12.4 to 18 GHz)
09 N S	1.0 to 18	9	±0.1	1	1	1.35:1 (1 to 2 GHz) 1.50:1 (12.4 to 18 GHz)
10 N S	1.0 to 18	10	±0.1	1	1	1.35:1 (1 to 2 GHz) 1.50:1 (12.4 to 18 GHz)
11 N S	2.0 to 18	20	±0.2	1	1	1.35:1 (1 to 4 GHz) 1.50:1 (12.4 to 18 GHz)

1/ Maximum pulse duration 5 microseconds.
2/ At the basic test frequency.

Source: https://assist.dla.mil -- Downloaded: 202610-16T22:33Z
Check the source to verify that this is the current version before use.

NOTE: Attenuators covered by this specification sheet are substitutable for the manufacturer's part number specified in table II. This information in no way implies that the manufacturer's part or NSN is suitable as a substitute for the military part number.

TABLE II. Substitution data.

Military part number M3933/26	Manufacturer's code	Manufacturer's part number	NSN 5985-
-01	93459	210-1	00-626-4109
-01	93459	210A-1	00-626-4109
-02	93459	210-2	
-02	93459	210A-2	
-03	93459	210-3	00-096-6835
-03	93459	210A-3	00-096-6835
-04	93459	210-4	
-04	93459	210A-4	
-05	93459	210-5	00-084-4118
-05	93459	210A-5	
-06	93459	210-6	
-06	93459	210A-6	
-07	93459	210-7	00-084-4119
-07	93459	210A-7	
-08	93459	210-8	
-08	93459	210A-8	
-09	93459	210-9	
-09	93459	210A-9	
-10	93459	210-10	00-615-3105
-10	80058	CM893/U	00-615-3105
-10	93459	210A-10	00-139-1768
-11	93459	210-20	00-633-0231
-11	80058	CM894/U	00-633-0231
-11	93459	210A-20	01-095-7489

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Air Force - 11, 99
DLA - ES

User activities:
Army - MO, SM
Navy - MC, SH, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0983-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-3933/26	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-16T22:33Z
Check the source to verify that this is the current version before use.