
FEDERAL SPECIFICATION SHEET

WIRE, METAL, ROUND, NON-ELECTRICAL, COPPER ALLOY 510

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the wire described herein shall consist of this document and the latest issue of QQ-W-321.

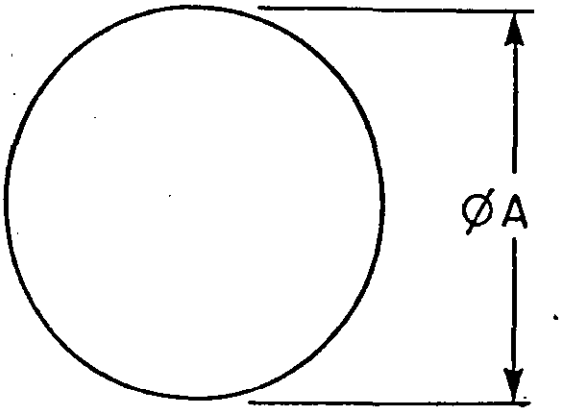

NOTES:

1. All dimensions are in inches.

FIGURE 1. WIRE, METAL, ROUND, NON-ELECTRICAL, COPPER ALLOY 510

AMSC N/A FSC 9525

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. MATERIAL. Copper base alloy 510 (UNS C51000) as specified in procurement document.

2. FORMING PROCESS. Cold drawn

3. HEAT TREATMENT. Spring temper

4. PART NUMBER. The part number consists of the basic number of this specification sheet, and a dash number taken from Table I.

   EXAMPLE: QQW321/10-001

5. MARKING. Copper and copper base alloys shall be marked in accordance with FED-STD-185 with the exception that a part number from this military standard shall be included as part of the identification marking.

6. HAZARDOUS WASTES. Hazardous waste generated by this process shall be disposed of in accordance with local and federal regulations. Material safety data sheets shall be prepared in accordance with FED-STD-313.

NOTES:

1. The product purchased with this specification sheet shall be in accordance with QQ-W-321 except the dimensional characteristics will conform to this specification sheet.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:05Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	ØA (IN.)	LENGTH (FT) APPROX	FT/LB APPROX	CL = COIL SL = SPOOL
-001	.013	1000	1000	1 Lb/CL
-003	.015	2036	1310	1 Lb/CL
-005	.020	4083	820	5 Lb/CL
-007	.028	3036	408	5 Lb/CL
-009	.032	1250	324	5 Lb/CL
-011	.035	1281	255	5 Lb/CL
-013	.040	1016	207	5 Lb/CL
-015	.045	805	163.5	5 Lb/CL
-017	.057	506	102.2	5 Lb/CL
-019	.064	803	81	10 Lb/CL
-021	.072	649	64	10 Lb/CL
-023	.080	505	50.6	10 Lb/CL
-025	.090	400	40	10 Lb/CL
-027	.102	317	31.74	10 Lb/CL
-029	.114	252	25.5	10 Lb/CL
-031	.128	195	20.2	10 Lb/CL
-033	.144	158	16	10 Lb/CL
-035	.162	125	12.63	10 Lb/CL
-037	.181	99	10	10 Lb/CL
-039	.204	79	7.98	10 Lb/CL
-041	.229	62	6.33	10 Lb/CL
-043	.257	49	4.98	10 Lb/CL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MR
Navy - AS
Air Force - 99

Review Activities:
Army - MI, AV, AL, GL, AR
Air Force - 84

User Activities:
Army - ME
Navy - SH

Preparing Activity:
Army - MR

(Project 9525-0188)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:05Z
Check the source to verify that this is the current version before use.