FED. SUP CLASS
5140

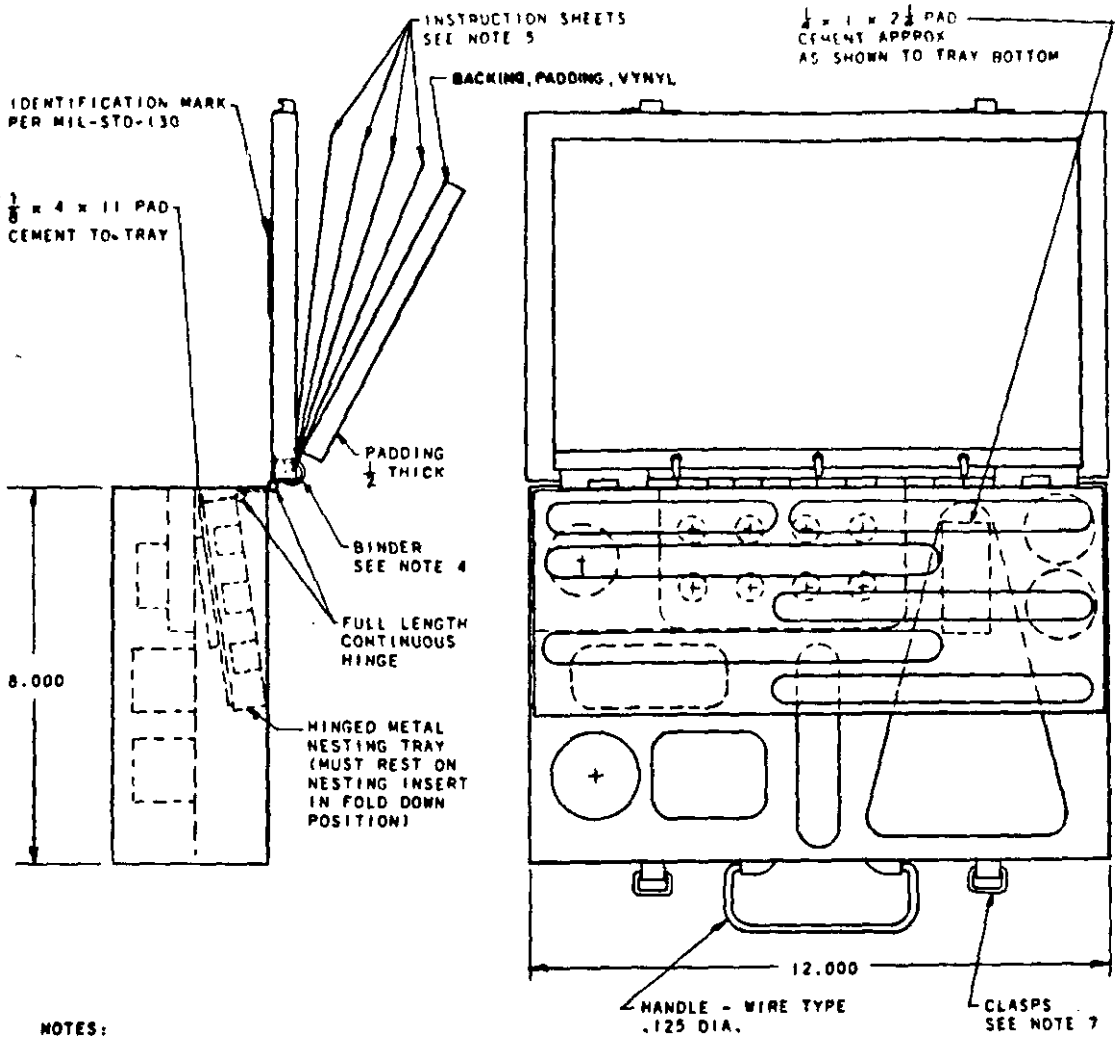

NOTES:

1. DIMENSIONS ARE IN INCHES - TOLERANCES ±.031. MEASUREMENTS ARE INSIDE DIMENSIONS. BREAK ALL SHARP EDGES AND REMOVE BURRS.
2. CASE, COVER AND TRAY: SHEET METAL 19 GAGE IN ACCORDANCE WITH SPEC QQ-S-698 BAKED ENAMEL, GRAY HAMMERTONE FINISH ON ALL METAL PARTS
3. PADDING AND NESTING MATERIAL: FOAMED POLYETHYLENE, COLOR OPTIONAL SEE SHEET 7 (MS27430) FOR CUTOUTS.
4. BINDER: LOOSE LEAF THREE RING .437 I.D., 2.750 CENTER DISTANCE BETWEEN RINGS - SECURELY RIVET TO INSIDE OF COVER AS SHOWN
5. INSTRUCTION SHEETS: WHITE VINYL .020 THICK - LETTERING MUST BE LEGIBLE AND SUITABLY PROTECTED WITH TRANSPARENT COATING - SEE SHEETS 2 THRU 6
6. CONTENTS CHART: WHITE VINYL WITH PRESSURE SENSITIVE BACKING - SEE SHEET 6 - LOCATE ON INSIDE OF COVER
7. CLASPS: MUST BE DRAW PULL TYPE AS SHOWN WITH PROVISION FOR USING A SUITABLE LOCKING DEVICE
8. THIS STANDARD IS PART OF MS27426 TOOL KIT

(B) CANCELED AFTER 6 Nov 79. USE MIL-T-83507/7.

THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL ~~BE~~ OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Review activities: Army - Navy - Air Force - 85-11, 99

APPROVED 15 DEC. 1966 REVISED (A) DEC. 1968 (B) 6 Nov 79

This standard has been approved by the AFLC Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A USAF-85 Other Cust	International Interest	TITLE CASE, ELECTRICAL CONNECTOR CRIMPING, INSERTION AND REMOVAL TOOLS	MILITARY STANDARD MS 27430 (USAF)
Procurement Specification NONE		SUPERSEDES:	PAGE 1 OF 7

DD FORM 1 MAY 73 672

5140-F070

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.