NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6130

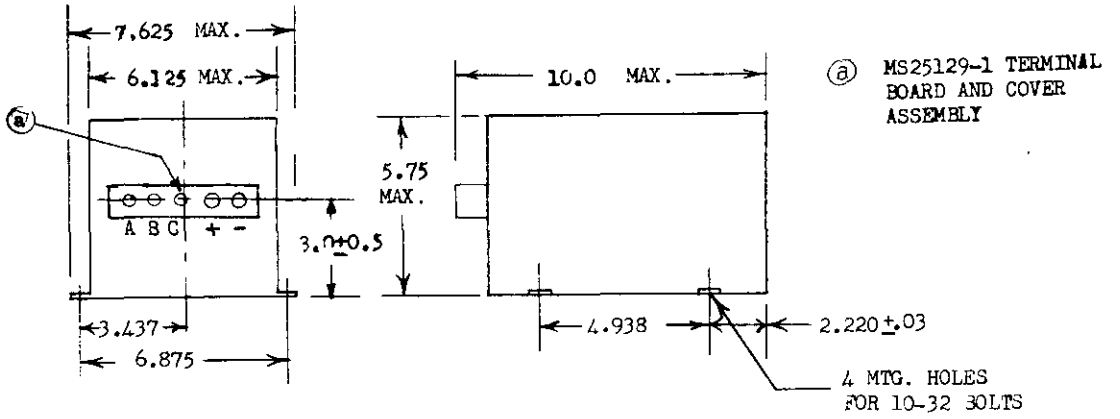

ⓐ MS25129-1 TERMINAL BOARD AND COVER ASSEMBLY

INPUT	
Voltage (Nominal)	115/200 Volts
Frequency (Nominal)	400 cps
Phase	3
OUTPUT	
Voltage (Nominal)	28 Volts
Current to 60,000 ft. alt.	60 Amp.
EFFICIENCY	
At sea level, 25 ± 15°C, half rated load to rated load	76% Min.
WEIGHT (lbs.)	12.0 Max.

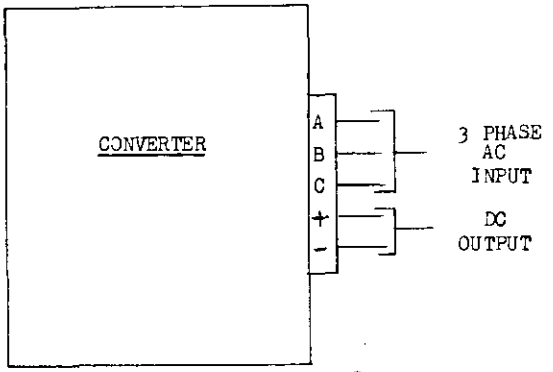

INPUT PHASE ROTATION A, B, C

MS PART NO.
MS-28124-1

For any combination of conditions listed below, the output voltage shall remain within the indicated limits.

Conditions	Output Voltage Limits
Input voltage varied between 112.5/195 and 121/210 volts, and input frequency varied between 380 to 420 cps.	
Load varied from 0 to rated current.	Low 24.5 High 29.5
Ambient temperature-altitude varied within the range as shown in Figure 1 for the continuous duty, 30 minute and 5 minute ratings.	
Mounted in any position.	

Ⓓ CANCELLED AFTER 30 SEPTEMBER 1982.

NOTES:

1. All dimensions are shown in inches. Tolerances are ±0.015 inches unless otherwise shown.
2. The weight and volume limitations shown on this drawing include all auxiliary apparatus necessary to make this unit conform to the procurement specification.

APPROVED 9 Aug 1960 REVISED Ⓐ 20 July 1961 Ⓑ 27 August 1963 Ⓒ 21 July 1975 Ⓓ 30 September 1982

P.A. NAVY - BUWEPS Other Cust	TITLE CONVERTER, 60 AMPERE, CLASS A	MILITARY STANDARD MS28124(WEP)
Procurement Specification MIL-C-7115(AER)	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T16:57Z
Check the source to verify that this is the current version before use.