
* U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/3181

FED. SUP CLASS
5935

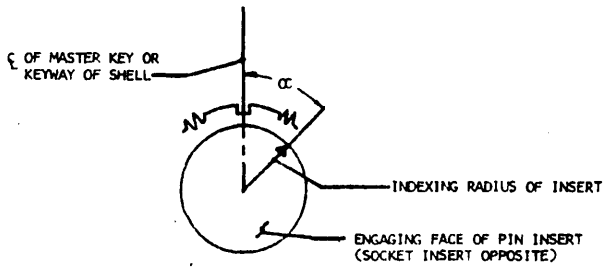

APPLICABLE CONNECTORS (REF)	
RECEPTACLES	PLUGS
MS3134 MS3145 MS3149 MS3424 MS3464	MS3446 MS3467 MS3468 MS3448

INSERT POSITION FIGURE

NOTES:

1. DIMENSIONING IN ACCORDANCE WITH MIL-STD-8. DIMENSIONS IN INCHES.
2. DIMENSIONS LOCATING CONTACTS AND INSERTS ARE TRUE POSITION. FOLLOWING TOLERANCES APPLY TO INSERT INSTALLED IN SHELL:
   (A) CENTER OF EACH HOLE IN INSERT SHALL BE LOCATED AT TRUE POSITION WITHIN .014 DIA. [℄.000 M Z]
   (B) CENTER OF ENGAGING END OF EACH CONTACT SHALL BE LOCATED AT TRUE POSITION WITHIN .024DIA. [℄.327 DIA.]
3. DIMENSIONS AND MARKINGS SHOWN ARE FOR ENGAGING FACE OF PIN INSERT (SOCKET INSERT OPPOSITE).
4. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINES.
5. EACH INSERT ARRANGEMENT IS SHOWN IN ITS NORMAL POSITION IN THE SHELL.
6. IN NORMAL POSITION, THE INDEXING RADIUS COINCIDES WITH ℄ OF THE MASTER KEY OR KEYWAY OF SHELL.
7. IN ALTERNATE POSITIONS THE PIN INSERT IS ROTATED CLOCKWISE SO THAT ANGLE CC BETWEEN THE INDEXING RADIUS AND THE ℄ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.
8. IN ALTERNATE POSITIONS THE SOCKET INSERT IS ROTATED COUNTERCLOCKWISE SO THAT ANGLE CC BETWEEN THE INDEXING RADIUS AND THE ℄ OF THE MASTER KEY OR KEYWAY OF SHELL IS AS REQUIRED.

APPROVED 21 July 1971 REVISED

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. NAVY AS Other Cust	International Interest	TITLE INSERT ARRANGEMENTS, ELECTRIC CONNECTOR, SHELL SIZE 61	MILITARY STANDARD MS 33704 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 3

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to comply with this standard where suitable.

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-N756


(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:07Z
Check the source to verify that this is the current version before use.

QTY.	SIZE	SYMBOL
61	20	◎

FED. SUP CLASS
5935

SERVICE RATING 1

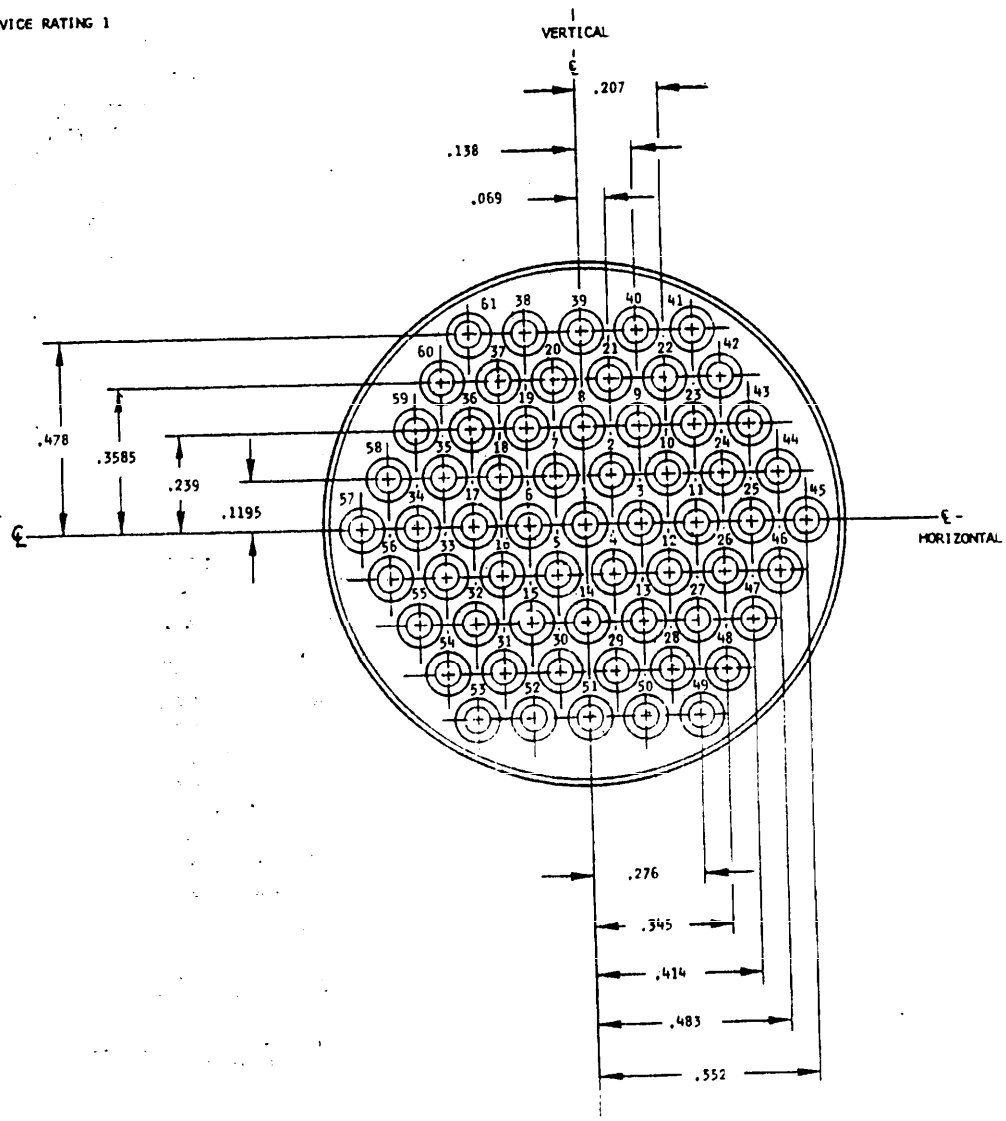

ALTERNATE INSERT POSITIONS 0C DEGREES				
W	X	Y	B	C
-	-	75°	150°	225°

SIZE ARR.
61 - S 0

APPROVED 21 July 1971 REVISED

P.A. NAVY AS Other Cust	International Interest	TITLE INSERT ARRANGEMENTS, ELECTRIC CONNECTOR, SHELL SIZE 61	MILITARY STANDARD MS 33704 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

QTY	SIZE	SYMBOL
4	16	●
29	20	⊙
8	12	⊕

SERVICE RATING 1

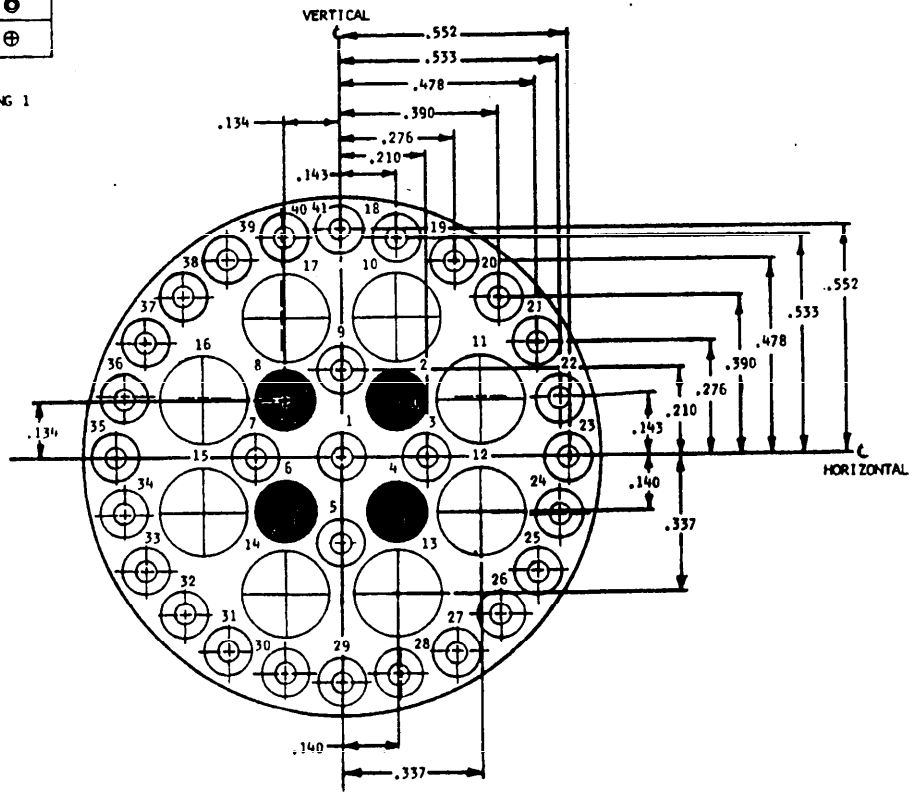

ALTERNATE INSERT POSITIONS				
CC DEGREES				
W	X	Y	B	C
-	67° 30'	-	-	-

SIZE ARR
61 – 42

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY AS Other Cust	International Interest	TITLE INSERT ARRANGEMENTS, ELECTRIC CONNECTOR, SHELL SIZE 61	MILITARY STANDARD MS 33704 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 10 APR 64 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:07Z
Check the source to verify that this is the current version before use.