COMMERCIAL ITEM DESCRIPTION

FILLER, PIPET (Rubber)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification NNN-F-1486.

This commercial item description covers one type of laboratory rubber pipet filler, suitable for use with pipets in the transfer of corrosive, toxic, infectious or odorous liquids.

Salient characteristics:

The pipet filler shall be in accordance with Figure 1 and shall consist of a hollow spherical bulb, three ball valves and a pipet receptacle. The valves shall operate independently and shall be capable of accurately controlling the inflow of liquids into the pipet, holding the desired level, and of accurately controlling the discharge.

The bulb and pipet receptacle of the filler shall be made of a rubber compound containing a minimum of 50 percent elastomer. The elastomer shall comprise a minimum of 99 percent pure natural rubber.

The pipet filler shall be 4-3/4 inches high with a bulb diameter of 2-5/32 inches. The throat of the pipet filler shall fit snugly on pipets with upper end diameters of 0.092 through 0.30 inches. Letters shall be legibly molded into both sides of the rubber encasing each valve. Letter "E" shall be indicated at the valve between the throat and atomsphere, letter "S" at the valve between the throat and the bulb and letter "A" at the valve between the bulb atomsphere.

The ball valves shall be made of polished pure mineral agate or polished corrosion resistant steel, AISI 300 or 400 series. The ball valves shall show no evidence of leakage after pressure stabilization (initial surge) when subjected to 20 pounds per square inch gage. Leakage shall be determined using an air flow meter having graduations of 0.01 cubic foot per hour.

The pipet filler shall be black and shall be legibly and permanently marked with the name or registered trademark of the manufacturer.

AMSC N/A FSC 6640

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

Printed instructions for use of the filler shall accompany each unit and shall be neat and legible.

Pipet filler lot sizes shall be uniform in all characteristics and materials of construction and shall have no tears, holes, cracks or tackiness which shall be considered defects.

Workmanship. The pipet filler shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One filler, as specified, constitutes one unit.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspections. Inspections, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for inspection. Sampling for inspection shall be conducted in accordance with commercial practice to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more inspection characteristics.

Tests. Tests shall be conducted in accordance with commercial practice to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

For information only - The following products, as of the date of this document, are puported by the following companies to meet the salient characteristics of the item(s) described herein:

Fisher Scientific	Cat. No.	13-681-50
Thomas Scientific	Cat. No.	7775-F10
Daigger Scientific	Cat. No.	G 20389
Spectronics Corp.	Cat. No.	8193-474

Note: The following National Stock Number is covered by this document:

6640-00-889-1712 FILLER, PIPET RUBBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

Ordering data. (Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order).

MILITARY INTERESTS:

Custodians:
Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD-MB

Agent

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITY:

VA-OSS
PHS
FDA-MPQAS

Project No. 6640-1379

Location: Disk #3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

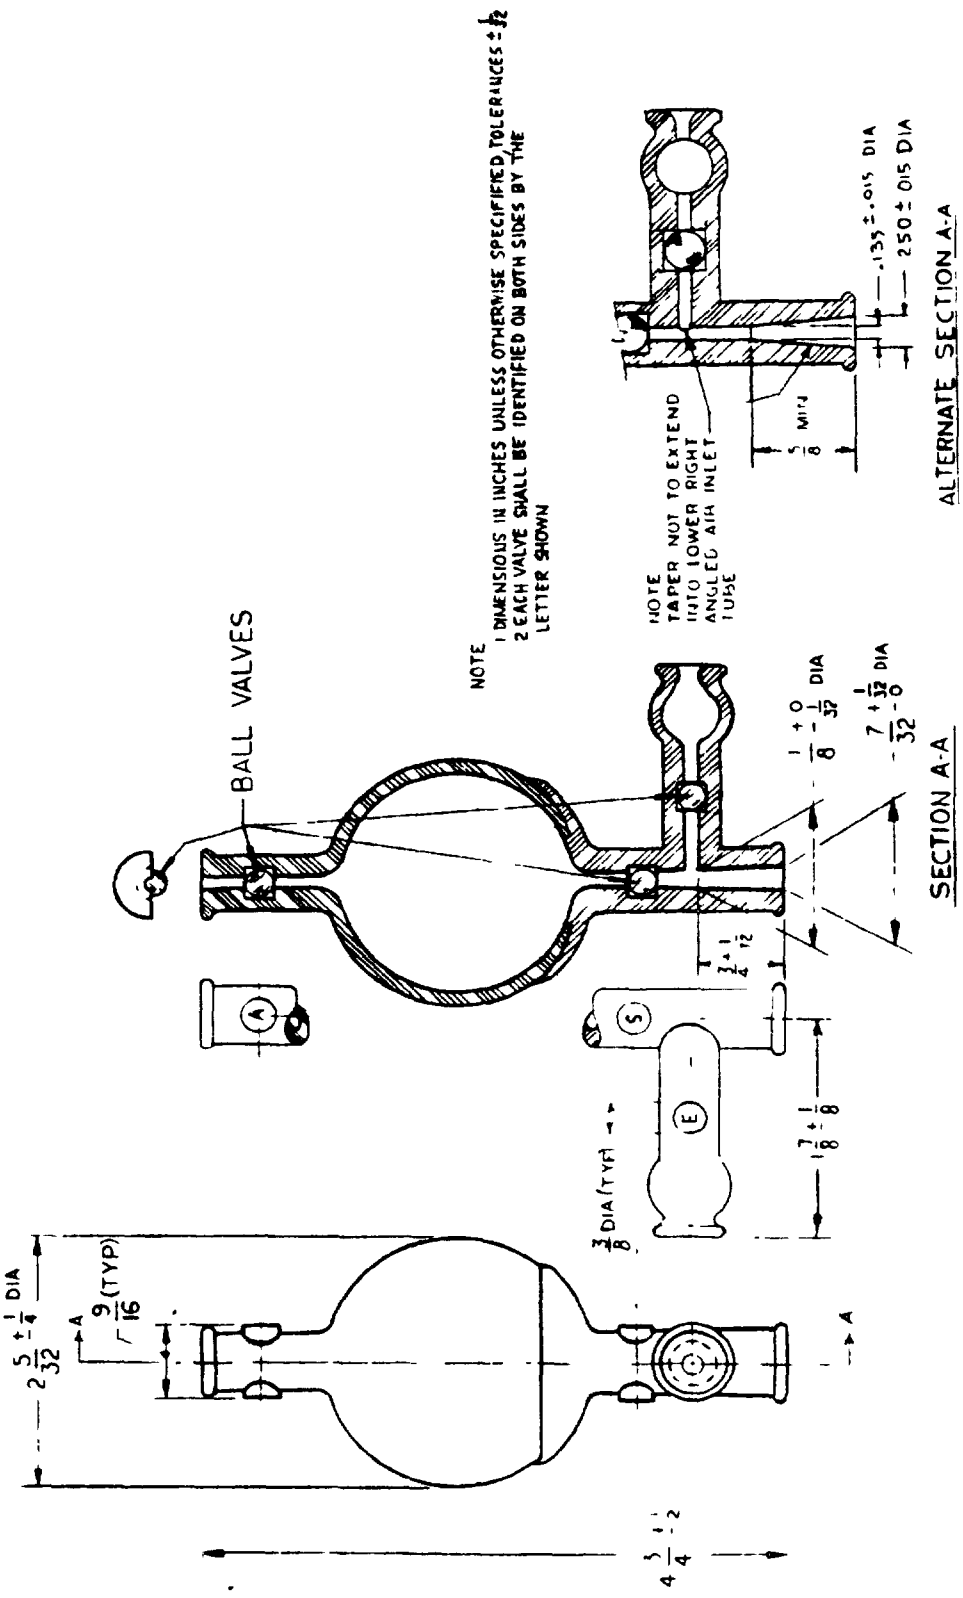


FIGURE 1 FILLER, PIPET (RUBBER)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4066 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
Attn: DPSC-RSTS
2800 South 20th Street
Philadelphia, PA 19101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
A-A-51803	FILLER, PIPET (Rubber)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording.

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:01Z
Check the source to verify that this is the current version before use.