
MILITARY SPECIFICATION SHEET

DUMMY LOADS, ELECTRICAL, COAXIAL

FREQUENCY RANGE, DC TO 5 GHz

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dummy loads described herein shall consist of this document and the latest issue of Specification MIL-D-39030.

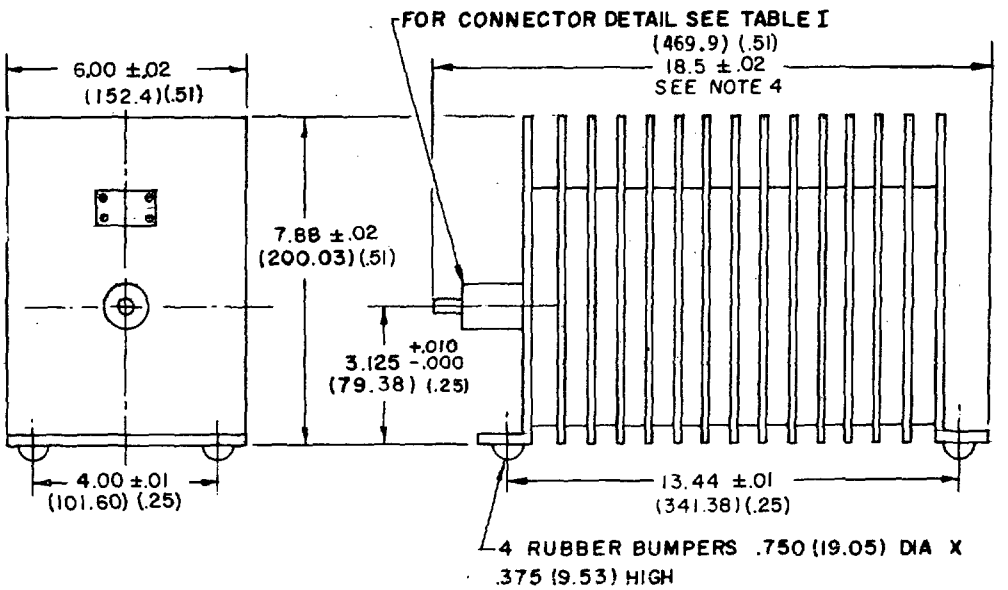

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Overall length includes an optional matching taper.

FIGURE 1. Dummy load.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

VSWR: DC to 1 GHz - 1.1 maximum.
>1 to 3 GHz - 1.2 maximum.
>3 to 5 GHz - 1.5 maximum.

Nominal impedance: 50 ohms.

Weight, maximum: 16 pounds.

Average power: 600 watts at 40°C.
Overload: 150 percent of average power, 5 minutes, 200 percent of average power, 1 minute.

Peak power: See table I. Maximum pulse duration - 5 microseconds.

Mounting position: Bumpers resting on horizontal surface.

Part number: Consists of the basic number of this specification sheet and a dash number taken from table I.

Example:

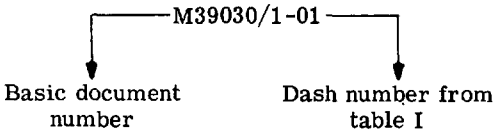


TABLE I. Dash number and characteristics.

Dash number	Superseded type designation	Connector series	Peak power (kW)
01	DA-494/U	N male	10
02	DA-492/U	N female	10
03	DA-495/U	BNC male	2.5
04	DA-496/U	BNC female	2.5
05	DA-497/U	TNC male	2.5
06	DA-498/U	TNC female	2.5
07	DA-499/U	LC male	250
08	DA-500/U	LC female	250
09	DA-501/U	C male	10
10	DA-502/U	C female	10
11	DA-503/U	1-5/8 inch coaxial	250

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MI
Navy - SH, 05
Air Force - 17, 80, 85
DSA - ES

User activities:
Army - AV
Navy - MC, AS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5985-0747-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T18:48Z
Check the source to verify that this is the current version before use.