FED. SUP CLASS
9535

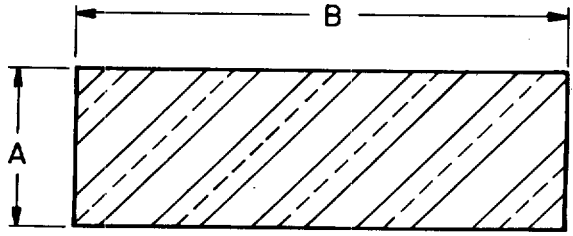


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	B
-001	.188	48
-003	.220	48
-005	.250	48
-007	.284	36
-009	.312	48
-011	1.250	48
-013	1.450	36
-015	1.500	48
-017	1.750	48
-019	1.880	48
-021	2.000	48
-023	2.100	36
-025	2.250	36
-027	2.750	48
-029	3.000	48
-031	4.000	36

USER ACTIVITIES:
ARMY-ER, GL, MI

REVIEWER ACTIVITIES:
ARMY-AR, AV
NAVY-OS, SH
AIR FORCE-84
DLA-IS

REVISED
APPROVED 9 NOV 87

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-MR AIR FORCE-99		PLATE, METAL, TITANIUM ALLOY 6AL-6V-2Sn (AB-3)	MS14525
PROCUREMENT SPECIFICATION MIL-T-9046	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9535-0461

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9535

REQUIREMENTS:

1. MATERIAL. ALPHA-BETA TITANIUM ALLOY, 6Al-6V-2SN (AB-3), AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.


2. MATERIAL CONDITION. MATERIAL SHALL BE ANNEALED AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.

3. FABRICATION METHOD AND FINISH. NUMBER 1 FINISH (HOT-ROLLED, ANNEALED, AND DESCALED) AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.

4. LENGTH. STANDARD LENGTH OF TITANIUM PLATE SHALL BE 8 FEET NOMINAL.

5. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14525-005



6. MARKING. EACH SHEET SHALL BE MARKED AS SPECIFIED IN PROCUREMENT SPECIFICATION WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY-ER, GL, MI

REVIEWER ACTIVITIES:
ARMY-AR, AV
NAVY-OS, SH
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVISED
APPROVED 9 NOV 87

P.A. NAVY-AS Other Cust ARMY-MR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE PLATE, METAL, TITANIUM ALLOY 6AL-6V-2Sn (AB-3)	MILITARY STANDARD MS14525
PROCUREMENT SPECIFICATION MIL-T-9046	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.