
FED. SUP CLASS
4730

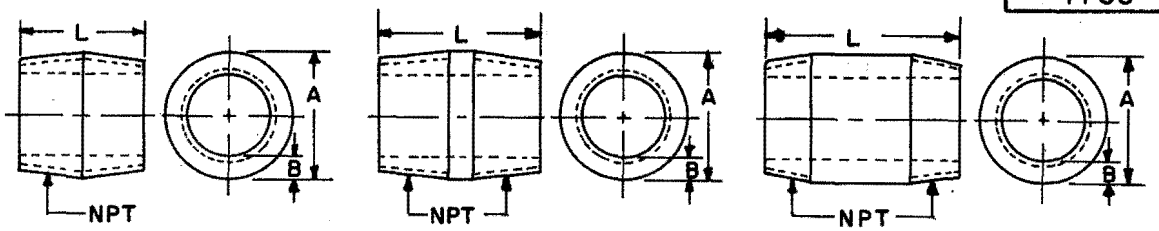


✳ CLOSE TYPE ▲ SHORT TYPE LONG TYPE

| NOMINAL PIPE SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | 2 | 2-1/2 | 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| A OUTSIDE DIAMETER | .405 | .540 | .675 | .840 | 1.050 | 1.315 | 1.660 | 1.900 | 2.375 | 2.875 | 3.500 |
| B THICKNESS | .062 | .083 | .090 | .107 | .114 | .126 | .146 | .150 | .156 | .187 | .219 |
| L LENGTH ±1/16 | DASH NUMBERS | | | | | | | | | | |
| 3/4 | *1 | | | | | | | | | | |
| 7/8 | | *20 | | | | | | | | | |
| 1 | | | *39 | | | | | | | | |
| 1-1/8 | | | | *58 | | | | | | | |
| 1-3/8 | | | | | *77 | | | | | | |
| 1-1/2 | ▲ 6 | ▲ 24 | ▲ 42 | ▲ 60 | | *96 | | | | | |
| 1-5/8 | | | | | | | *115 | | | | |
| 1-3/4 | | | | | | | | *134 | | | |
| 2 | 9 | 27 | 45 | 63 | ▲ 81 | ▲ 99 | | | *152 | | |
| 2-1/2 | 10 | 28 | 46 | 64 | 82 | 100 | ▲ 118 | ▲ 136 | ▲ 154 | *172 | |
| 2-5/8 | | | | | | | | | | | *191 |
| 3 | 12 | 30 | 48 | 66 | 84 | 102 | 120 | 138 | 156 | ▲ 174 | ▲ 192 |
| 3-1/2 | 13 | 31 | 49 | 67 | 85 | 103 | 121 | 139 | 157 | 175 | 193 |
| 4 | 14 | 32 | 50 | 68 | 86 | 104 | 122 | 140 | 158 | 176 | 194 |
| 4-1/2 | 15 | 33 | 51 | 69 | 87 | 105 | 123 | 141 | 159 | 177 | 195 |
| 5 | 16 | 34 | 52 | 70 | 88 | 106 | 124 | 142 | 160 | 178 | 196 |
| 5-1/2 | 17 | 35 | 53 | 71 | 89 | 107 | 125 | 143 | 161 | 179 | 197 |
| 6 | 18 | 36 | 54 | 72 | 90 | 108 | 126 | 144 | 162 | 180 | 198 |

NOTES:

1. MATERIAL: Brass or copper shall be in accordance with procurement specification.
2. PROTECTIVE COATING: None.
3. THREADS: Nipples shall be threaded with American Standard Taper Pipe Threads (NPT) in accordance with Screw-Thread Standard for Federal Services, FED-STD-H28. (B)
4. DIMENSIONS: All dimensions are in inches unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   A. For nipples, brass, use the MS number, plus the dash number.
      Example: MS51846-1
   B. For nipples, copper, add (C) to the dash number. Example: MS51846-1C
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. * These nipples are close type.
9. ▲ These nipples are short type.
   } All others are long type.
10. For nipple, pipe, extra strong, brass or copper, see MS51872.

(B) Denotes changes

APPROVED 22 NOV 1967 REVISED (A) 12 DEC 72 (B) 6 Dec 82

User Activities: Army - AT, GL, ME, MI Navy - MC

Review Activity: Air Force - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| P.A. AR<br>Other Cust 11 | TITLE<br>NIPPLE, PIPE, STANDARD, BRASS OR COPPER | MILITARY STANDARD<br>MS51846 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>(B) ASTM B 687 | SUPERSEDES:<br>CPNX2 | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Coordinated)

4730-0455

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:10Z
Check the source to verify that this is the current version before use.