
NOTICE - REVIEW/USER INFORMATION IS CURRENT A[illegible] DE OF THIS DOCUMENT. FOR FUTURE COORDIN[illegible] OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT FEDERAL SUPPLY CLASSIFICATION LISTING OF DOD STANDARDIZATION DOCUMENTS.

INTEREST:
[illegible] - GL, MU
NAVY - MC
USAF


REVIEWER INTEREST:
ARMY - GL
NAVY - WP, SH
USAF - 69

This military sta[illegible]d is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document


FED. SUP CLASS
5120

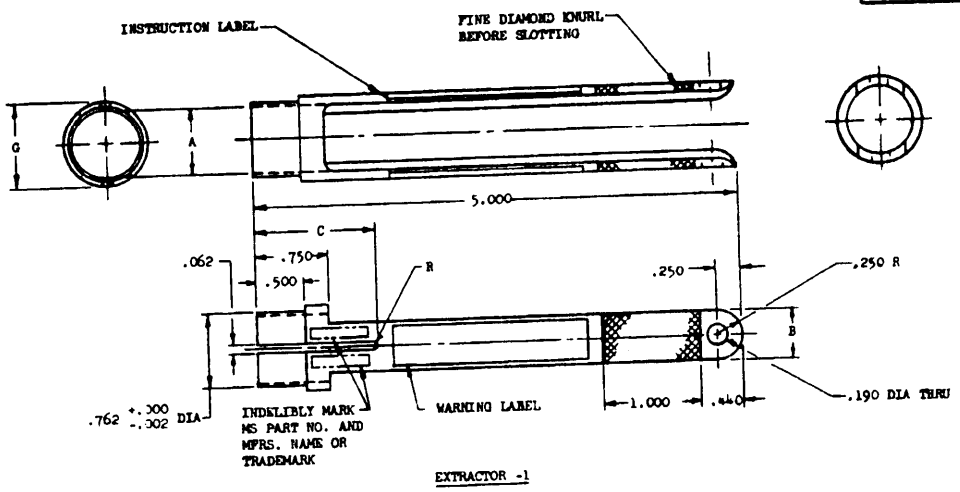

EXTRACTOR -1

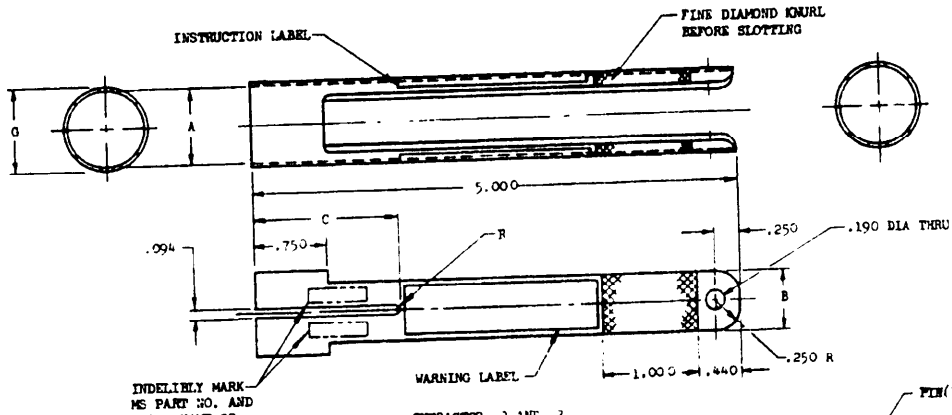

EXTRACTOR -2 AND -3

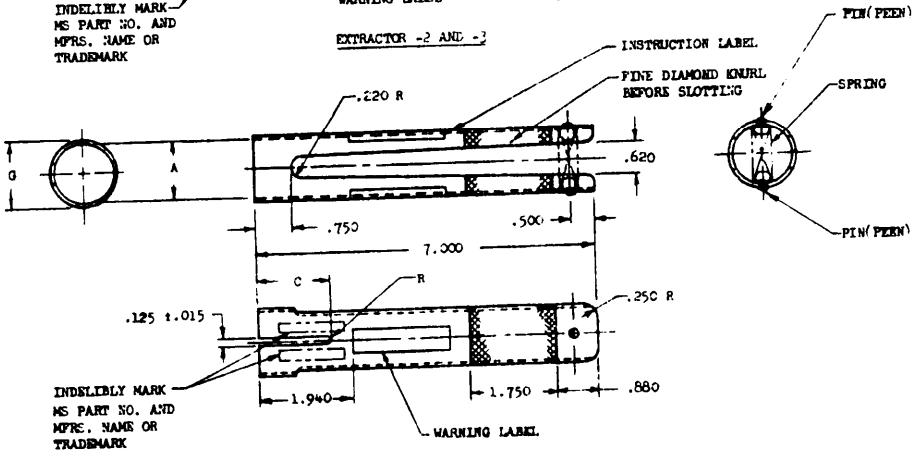

EXTRACTOR -4

APPROVED 18 MAY 1956 REVISED (A) 14 OCTOBER 1959 (B) 7 JUNE 1965

(B) ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY-WP Other Cust ARMY - GL USAF - 69	TITLE EXTRACTOR, ELECTRONIC TUBE	MILITARY STANDARD MS 25187
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.


NOTICE - REVIEW/USER INFORMATION IS CURRENT . . . IF
OF THIS DOCUMENT. FOR FUTURE COORDI. . . OF
CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION
SHOULD BE BASED ON THE INFORMATION IN THE CURRENT
FEDERAL SUPPLY CLASSIFICATION LISTING OF DOD
STANDARDIZATION DOCUMENTS.

U INTEREST:
ARMY - GL, MD
NAVY - MC
USAF -


REVIEWER INTEREST:
ARMY - GL
NAVY - WP, SH
USAF - 69

This military s is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


FED. SUP CLASS
5120

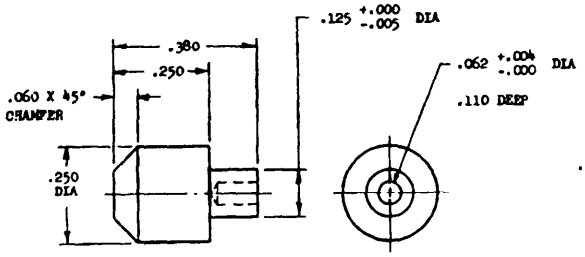


PIN
(2 REQD FOR -4)

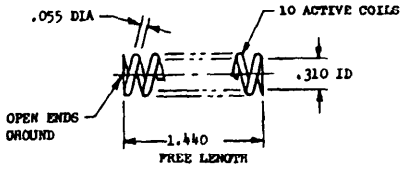

SPRING



INSTRUCTION LABEL



WARNING LABEL

DASH NO.	FOR ELECTRONIC TUBE	A INSIDE DIA	B	C	G TUBING STOCK SIZE
-1	7 PIN MINIATURE	.714 +.005 -.000	.500	1.250	7/8 OD X .080 WALL THICKNESS
-2	9 PIN MINIATURE	.805 +.010 -.000	.620	1.500	7/8 OD X .035 WALL THICKNESS
-3	STANDARD OCTAL METAL ENVELOPE	1.000 +.032 -.000	.750	1.500	1-1/8 OD X .063 WALL THICKNESS
-4	STANDARD OCTAL GLASS ENVELOPE AND TYPE 2C39	1.260 +.002 -.000		1.500	1-3/8 OD X .058 WALL THICKNESS

NOTES:

1. MATERIAL: (A) EXTRACTOR -1; STEEL TUBING, MIL-T-6736.
(B) EXTRACTOR -2, -3, AND -4; ALUMINUM ALLOY TUBING, WW-T-785.
(C) COMPRESSION SPRING; STEEL WIRE, QQ-W-470.
(D) PIN, CORROSION RESISTANT STEEL, MIL-S-7720, COMPOSITION 303Se, CONDITION B.
(E) WARNING LABEL AND INSTRUCTION LABEL; DECALCOMANIA, MIL-D-8635.

2. FINISH: (A) EXTRACTOR -1; BLACK PARKERIZE.
(B) EXTRACTOR -2, -3, AND -4; ANODIZE, MIL-A-8625, TYPE I, COLOR OPTIONAL.
(C) COMPRESSION SPRING; CADMIUM PLATE, QQ-P-416, TYPE I, CLASS B.

3. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.

4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED; TOLERANCES, DECIMALS ±.030.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 18 MAY 1956 REVISED (A) 14 OCTOBER 1959 (B) FOR CHANGES, SEE SHEETS 1 AND 2.

P.A. NAVY-WP Other Cust ARMY - GL USAF - 69	TITLE EXTRACTOR, ELECTRONIC TUBE	MILITARY STANDARD MS 25187
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 15320

W45

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.