This military standard has been approved by the Department of the Air Force and is for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 63 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


(LIMITED COORDINATION)

PA AF-85 Other Cust	International Interest	TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II.
Procurement Specification MIL-C-38999	SUPERSEDES	MILITARY STANDARD MS27479 (USAF)
	SHEET 1 OF 2	

5935-F966-17

INACTIVE FOR NEW DESIGN AFTER 13 AUG 74

USE MS27472

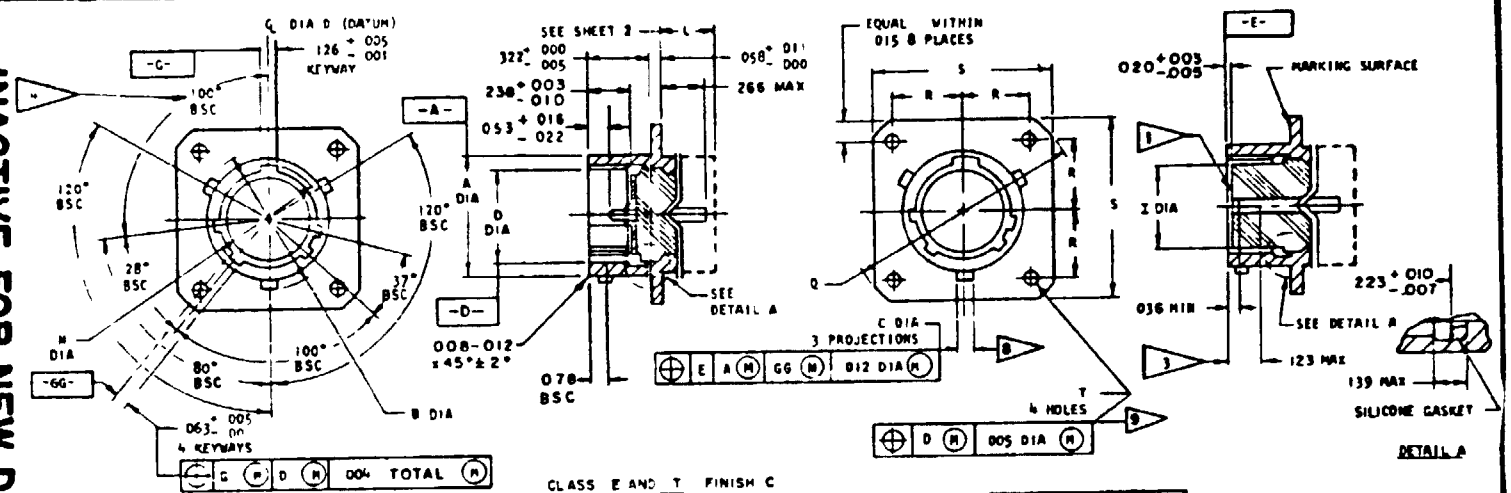

CLASS E AND T FINISH C

SHELL SIZE	A +.001 -.005 DIA	B +.000 -.016 DIA OVER PROJ	C +.006 -.002 DIA	D +.005 -.001 DIA	I ±.005 DIA	N +.005 -.006 DIA	Q MAX	R BSC	S MAX	T +.010 -.004	CC	FOR INSERT ARR SEE DWG MS
8	.473	.593	.078	.362	.285	.412	1 0/8	.497	.828	120	004	27343, 27516
10	.596	.650		.490	.413	.540	1 266	.3595	.954		010	27344, 27517
12	.750	.859		.607	.527	.689	1 391	.406	1 047			27345, 27518
14	.875	.974		.732	.652	.814	1 516	.453	1 141			27346, 27519
16	.000	1 .08		.857	.777	.939	1 641	.4845	1 234			27347, 27520
18	1 .125	1 .233		.982	.866	1.039	1 766	.531	1 328			27348, 27521
20	1 .250	1 .358	.125	1.087	.991	1 .164	1 891	.578	1 .453			27349, 27522
22	1 .375	1 .483		1.212	1 .116	1.289	2.016	.625	1.578			27350, 27523
24	1 .500	1 .610		1.337	1 .241	1.414	2 .204	.6875	1 .703	147		27351, 27524

NOTES

1. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 T.I.R
2. DIMENSIONS IN INCHES
3. THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AS A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING
4. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE FIGURE 6 OF PROCUREMENT SPECIFICATION
5. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R
6. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER M, SHALL BE CONCENTRIC AT MMC
7. DIAMETERS B AND I SHALL BE CONCENTRIC WITHIN .005 T.I.R AT MMC

(a) THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION

(a) THE GAGE FEATURES FOR GG SHALL BE 010 SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION

EXAMPLE OF PART NUMBER MS27479 T 24 C 61 P A

MS NO | CLASS | SHELL SIZE | FINISH (COLOR) | INSERT ARR. NUMBER | STYLE (P OR S) | POLARIZATION NO LETTER REQUIRED FOR NORMAL

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

FED SUP CLASS 5935

APPROVED 8-SEPT-66 REVISED (E) 13 AUG 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of the Air Force and is for use by that activity. All other military activities are required to employ this standard where suitable.


DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


PA AF 85	
Procurement Specification MIL-C-38999	International interest
Other Cust	
SUPERSEDES	TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II.
SHEET 2 OF 2	MILITARY STANDARD MS 27479 (USAF)

FED SUP CLASS 5935


CLASS T




CLASS E

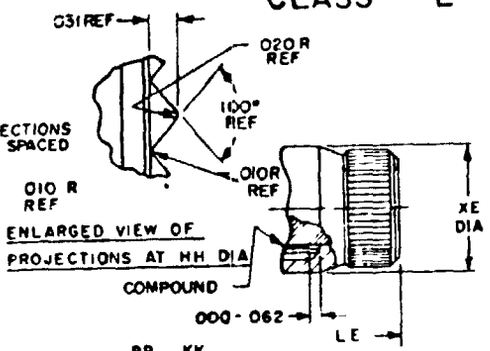

ENLARGED VIEW OF PROJECTIONS AT HH DIA



ENLARGED VIEW OF PROJECTIONS AT KK DATUM DIA



VIEW C ENLARGED

SHELL SIZE	G INSERT PROJECTION CLASS T ONLY	HH DIA +.000 -.005	KK DATUM DIA	NN	PP DIA ±.003	LE MAX OVER-ALL LENGTH	L* MAX OVER-ALL LENGTH	XE MAX D A	VV THREAD UNEF-2A MOD (PLATED)	
									SIZE	MAJOR DIA MOD
-	120 ± 030	.387	.366	12	.344	.562	.391	.594	7/16 - 28	.421 - .417
10		.515	.487	16	.472			.719	9/16 - 24	.542 - .538
12		.628	.609	20	.586			.844	11/16 - 24	.667 - .663
14		.754	.731	24	.711			.969	13/16 - 20	.791 - .787
16		.879	.853	28	.836			1.094	15/16 - 20	.916 - .912
18		.985	.974	32	.942			1.219	1 1/16 - 18	1.034 - 1.030
20		1.110	1.097	36	1.067			1.344	1 3/16 - 18	1.158 - 1.154
22		1.235	1.218	40	1.192			1.469	1 5/16 - 18	1.283 - 1.279
24	090 ± 050	1.360	1.340	44	1.317		.469	1.594	1 7/16 - 18	1.408 - 1.404

APPROVED 8-SEPT-66 REVISED (E) FOR CHANGES SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

AFLC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MS27579E (USAF) Connector, Receptacle, Electric, Wall Mounting Flange

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.