
REVIEW ACTIVITIES: ARMY-CR, ME
USER ACTIVITIES: NAVY-MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

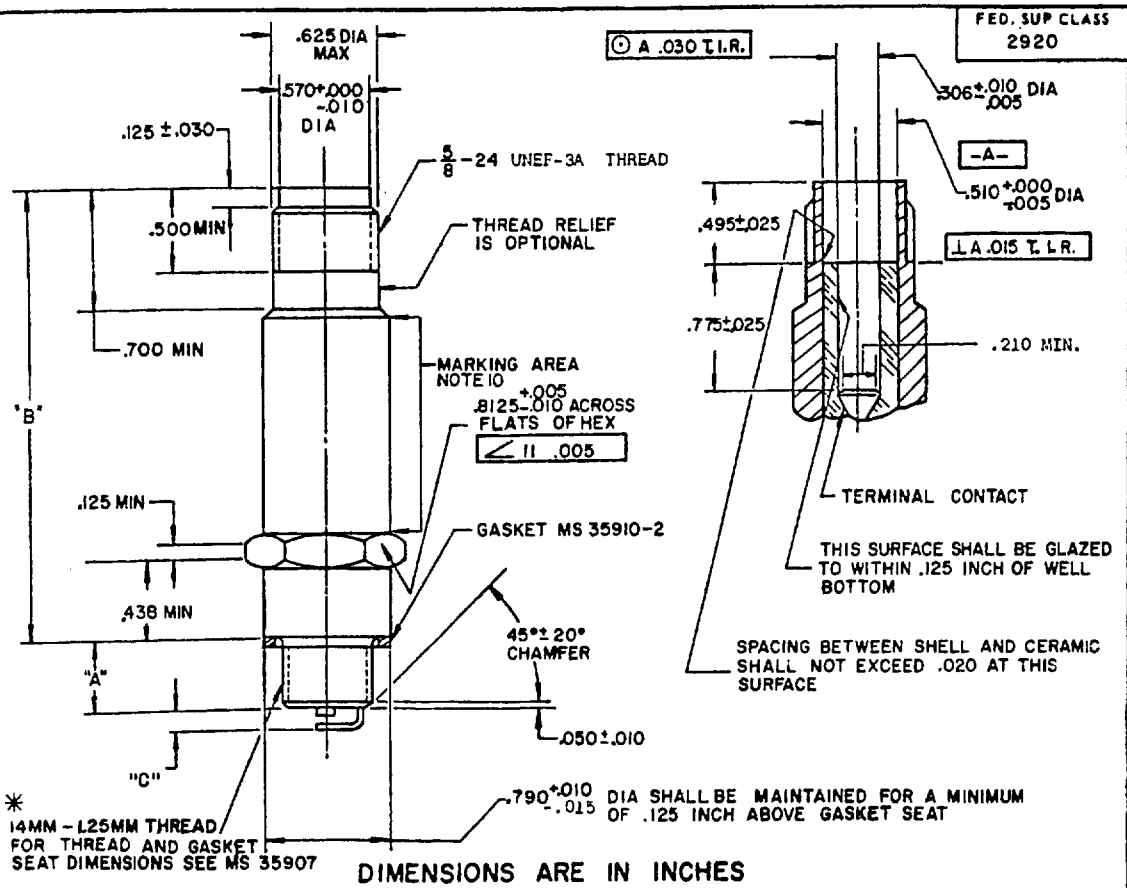

DIMENSIONS ARE IN INCHES

MS PART NO.	FORMER PART NO.	"A" REACH ±.016	"B" MAX	SUPPRESSOR (OHMS) +50% -25%	IMP RATING (P.S.I.)	"C" MAX
MS 35909-1	7524258	.375	2.875	10,000	200	.140
MS 35909-2	8357724	.375	2.875	10,000	155	.140
MS 35909-3	8741671	.375	2.875	10,000	135	.140
MS 35909-4	8689377	.500	2.875	10,000	230	.140
MS 35909-6	NONE	.500	2.330	10,000	180	.286

NOTES:

1. TYPE 1 (SHIELDED), CLASS A (SUPPRESSED) OF PROCUREMENT SPECIFICATION.
2. SHEET 2 IS IDENTICAL WITH SHEET 1 EXCEPT THAT DIMENSIONS ARE IN MILLIMETERS.
3. SPARK PLUG SHALL BE PROVIDED WITH GASKET CONFORMING TO MS 35910-2.
4. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICE HANDBOOK H-28.
5. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.005 .
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. (F) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL.
9. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS A DASH NUMBER. EXAMPLE: MS 35909-1
10. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(F) CERTAIN PROVISIONS OF THIS STANDARD (IDENTIFIED BY *) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS NATO-STANAG 2602 AND ABCA QSTAG 6. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

(F) REDRAWN


APPROVED 27 MARCH 1958 REVISED (E) 30 MAR 79

P.A. ARMY-AT Other Cust AF-99	INTERNATIONAL INTEREST	TITLE: SPARK PLUG: SHIELDED, 14MM, 1-1/4 INCH WELL (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS 35909
PROCUREMENT SPECIFICATION W-S-506		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBS 2920-0367

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 2920

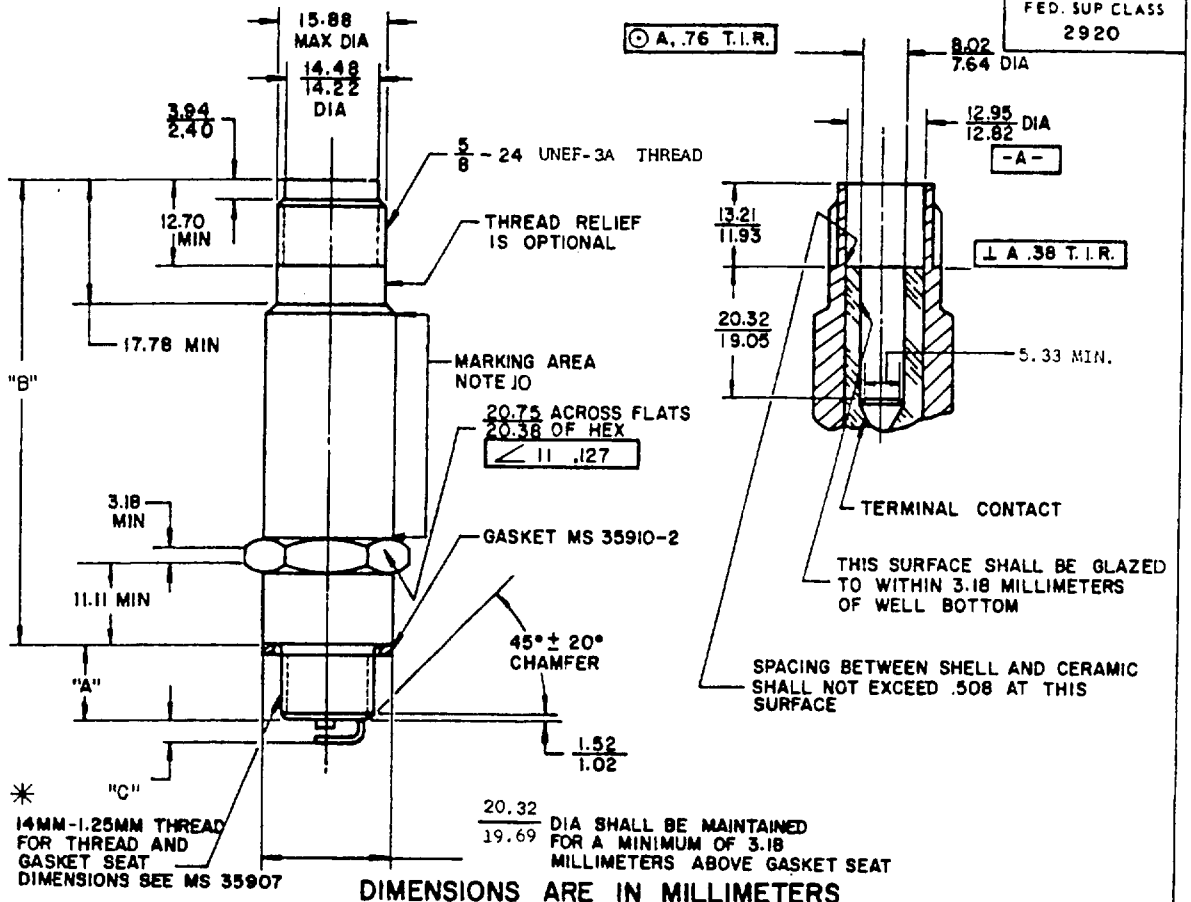

DIMENSIONS ARE IN MILLIMETERS

MS PART NO.	FORMER PART NO.	"A" REACH ±.40	"B" MAX	SUPPRESSOR (OHMS) +50%-25%	IMEP RATING (P.S.I.)	"C" MAX
MS 35909-1	7524258	9.53	73.03	10,000	200	3.56
MS 35909-2	8357724	9.53	73.03	10,000	155	3.56
MS 35909-3	8741671	9.53	73.03	10,000	135	3.56
MS 35909-4	8689377	12.70	73.03	10,000	230	3.56
MS 35909-6	NONE	12.70	59.18	10,000	180	7.26

NOTES:

1. TYPE I (SHIELDED), CLASS A (SUPPRESSED) OF PROCUREMENT SPECIFICATION.
2. SHEET 1 IS IDENTICAL WITH SHEET 2 EXCEPT THAT DIMENSIONS ARE IN INCHES.
3. SPARK PLUG SHALL BE PROVIDED WITH GASKET CONFORMING TO MS 35910-2.
4. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICE HANDBOOK H-28.
5. DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .127.
6. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

Ⓕ 8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL.

9. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS A DASH NUMBER. EXAMPLE: MS 35909-1
10. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

Ⓕ CERTAIN PROVISIONS OF THIS STANDARD (IDENTIFIED BY *) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS NATO-STANAG 2602 AND ABCA QSTAG 6. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 27 MARCH 1958 REVISED Ⓕ FOR CHANGES SEE SHEETS 1 AND 2

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		SPARK PLUG: SHIELDED, 14MM, 1-1/4 INCH WELL (OTHER THAN AIRCRAFT)	MS 35909
PROCUREMENT SPECIFICATION W-S-506		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.