MILITARY STANDARD

MIL-STD-1322-72
(NAVY)

22 JANUARY 1986


UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
PROJECTILE 5-INCH/54, HI-FRAG (EMPTY)
IN PALLET ADAPTER MK 11 MOD 2

UNIT LOAD DATA

NO. OF ADAPTERS PER UNIT LOAD	4
NO. OF PROJECTILES PER ADAPTER	12
NO. OF PROJECTILES PER UNIT LOAD	48
WEIGHT OF PALLET	94 LBS
WEIGHT OF ONE PALLET ADAPTER MK 11 MOD 2	39 LBS
WEIGHT OF STRAPPING	8 LBS
WEIGHT OF ONE PROJECTILE	58.5 LBS
GROSS WEIGHT OF UNIT LOAD	3066 LBS△
CUBE	34.4 CU. FT.

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 6
UNIT LOADS HIGH IN STORAGE

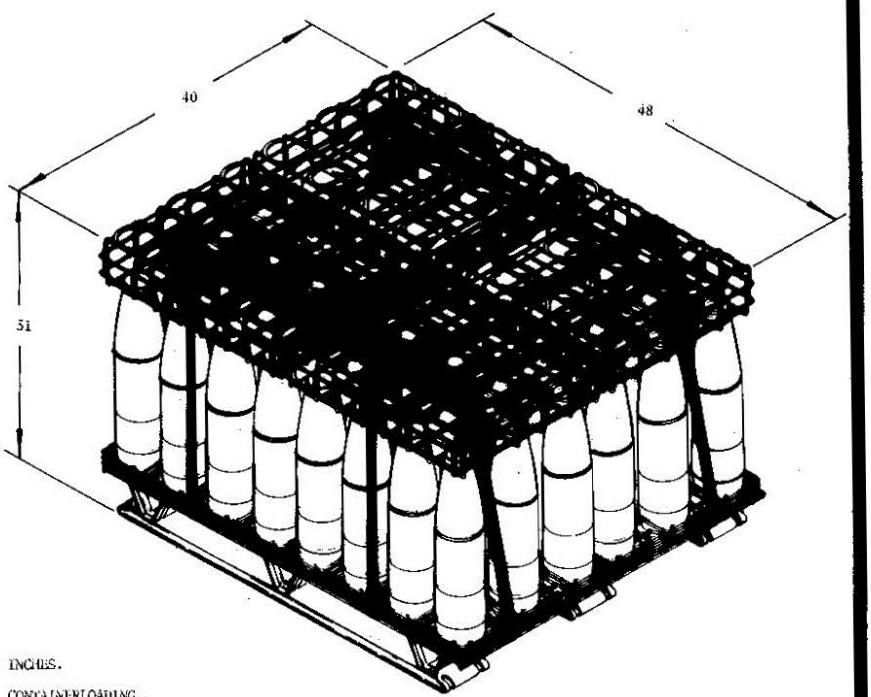

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE ASSOCIATED TRUCKLOADING, CONTAINERLOADING, AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR ~~DEPOT~~ HANDLING AND STORAGE AND FOR ~~SHIPMENT~~ BY COMMON CARRIER.

M. J. Grey NWHC — 1/21/86
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) — DATE

J E Kelly — 1/21/86
SIGNATURE — SEASYSCOM, BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY)

ORIGINATOR S. R. Petrie — 1/22/86 DATE

NAVAL WEAPONS HANDLING CENTER
WINSLOW, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: [illegible]
Check the source to verify that this is the current version before use.

PALLETIZING PROCEDURE

(A) THREAD LONGITUDINAL STRAP, ITEM 4, THROUGH DECK WIRES OF PALLET, ITEM 1 AS SHOWN IN DETAIL A.


(B) POSITION BOTTOM SPACER ON PALLET DECK AND LOAD WITH 12 PROJECTILES.

(C) POSITION TOP SPACER, ITEM 3,ON PROJECTILE WITH SMALL RINGS UP.


(D) REPEAT STEPS B, C FOR THE OTHER THREE SECTIONAL UNITS.

(E) THREAD LONGITUDINAL STRAP THROUGH TOP SPACERS, SEE SECTION B. TENSION AND DOUBLE NOTCH SEAL.

(F) POSITION LATERAL STRAP, ITEM 5, UNDER PALLET DECK WIRES AND AROUND THE UNIT LOAD. TENSION AND DOUBLE NOTCH SEAL.

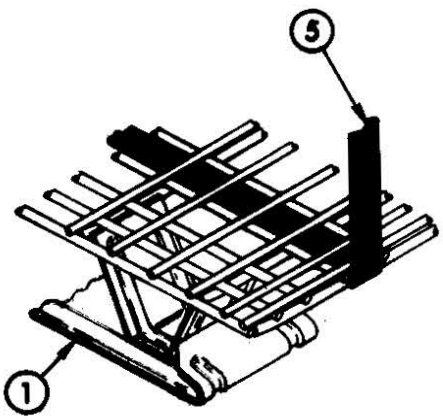

DETAIL A

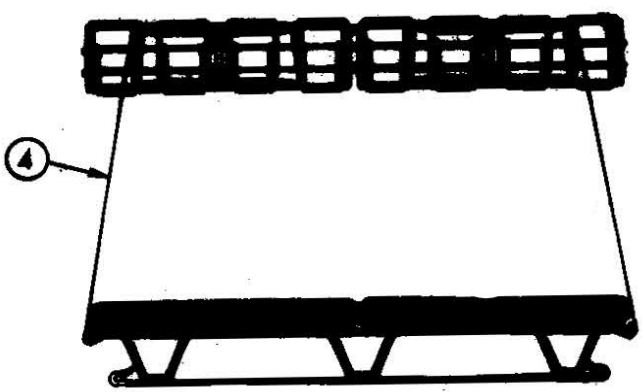

SECTION B-B

CAUTION

SEVERE IMPACT MAY CAUSE THE PROJECTILE CASE BASES TO DISENGAGE FROM THE BOTTOM ADAPTER. BE SURE ALL PROJECTILES ARE ENGAGED IN THE ADAPTER BEFORE DEPALLETIZING.

DEPALLETIZING PROCEDURE


(A) CUT AND REMOVE LONGITUDINAL AND LATERAL STRAPS.

(B) REMOVE TOP SPACERS.

(C) REMOVE PROJECTILES.

(D) REMOVE BOTTOM SPACERS AND STRAPS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:52Z
Check the source to verify that this is the current version before use.

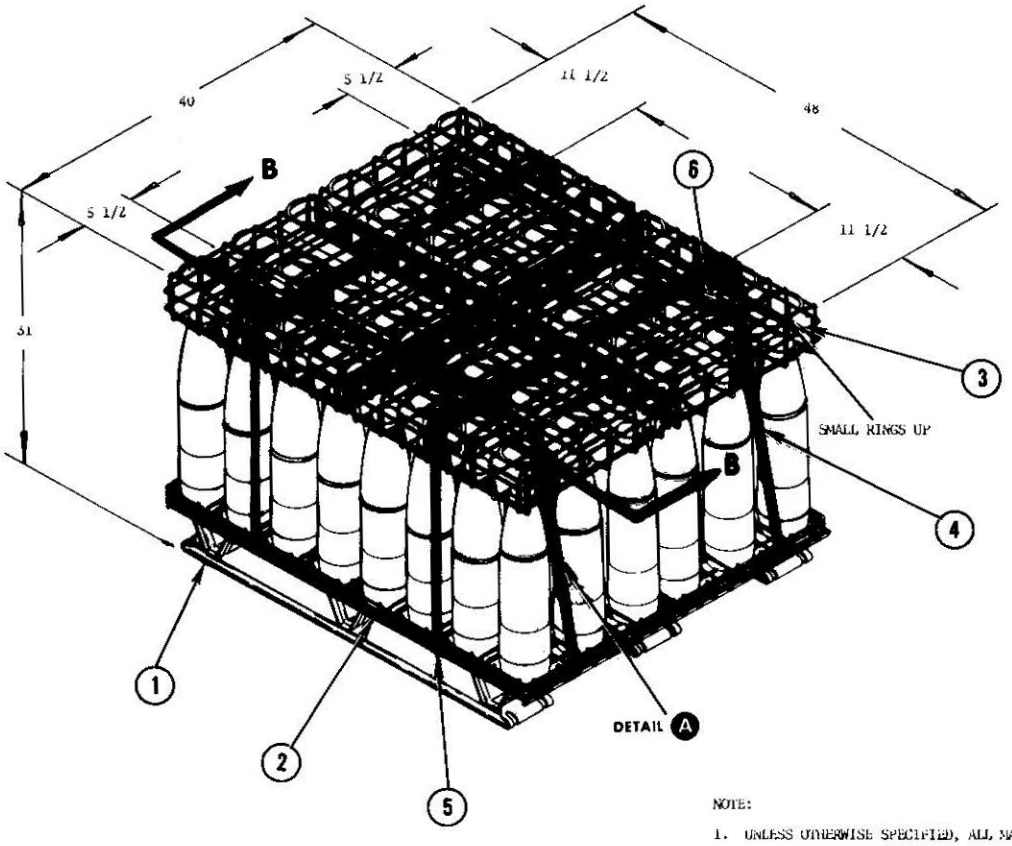

NOTE:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1522.

2. DO NOT USE TYPE 1 STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	6	SEAL	SEE NOTE 1	1 1/4
2	5	STRAPPING LATERAL SEE NOTES	SEE NOTES 1 & 2	1 1/4 X .035 12 FT
2	4	STRAPPING LONGITUDINAL SEE NOTES	SEE NOTES 1 & 2	1 1/4 X .035 14 FT
4	3	PALLET ADAPTER MK 11-2 TOP SPACER	STEEL 2645676	20 X 24
4	2	PALLET ADAPTER MK 11-2 BOTTOM SPACER	STEEL 2645675	20 X 24
1	1	PALLET MK 3 MOD 0	STEEL 564200	40 X 48 X 4 3/4

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:52Z
Check the source to verify that this is the current version before use.