
FED. SUP CLASS
6140

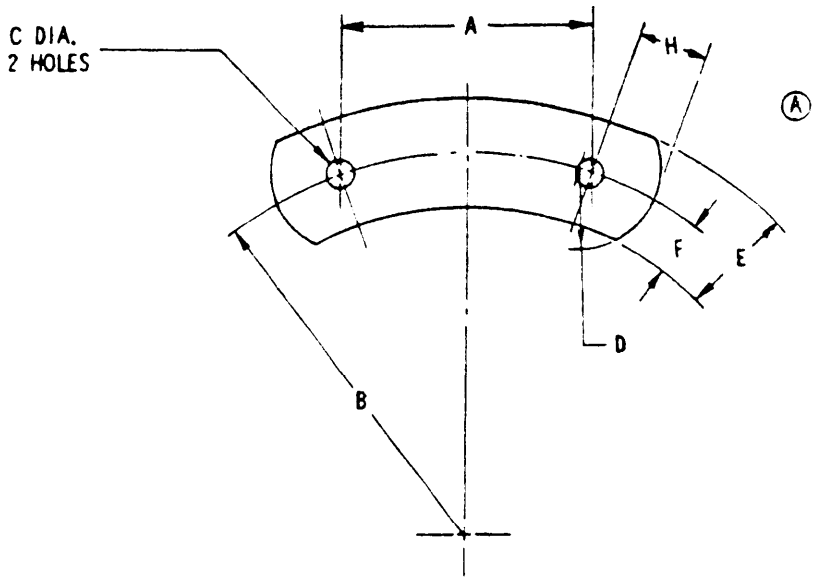

Ⓐ

DASH NO.	DIMENSIONS							
	A	B (RAD)	C	D ±.062	E ±.031	F	Thickness	H ±.015
-1	1.140	1.500	.178	.750	.500	.250	.062	.312
-2	1.485	1.875	.218	.500	.750	.375	.125	.375

Ⓐ

Notes:
1. Material: Copper, Specification QQ-C-502.
2. Finish: Nickel Plate, Specification QQ-N-290, Type V.
3. Unless otherwise specified: Dimensions are in inches, tolerances on decimals ±.010
4. Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ REDRAWN

APPROVED 23 MAR 64 REVISED Ⓐ 26 MAY 77

P A Air Force-99 Other Cust	INTERNATIONAL INTEREST	TITLE: CONNECTOR, BATTERY CELL, CURVED	MILITARY STANDARD MS27310 (99)
PROCUREMENT SPECIFICATION MIL-B-26220	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 6140-F455

military standard is approved for use by (Sacramento ALC MMIRE) Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.