
FED SUP CLASS
5310

MS9364

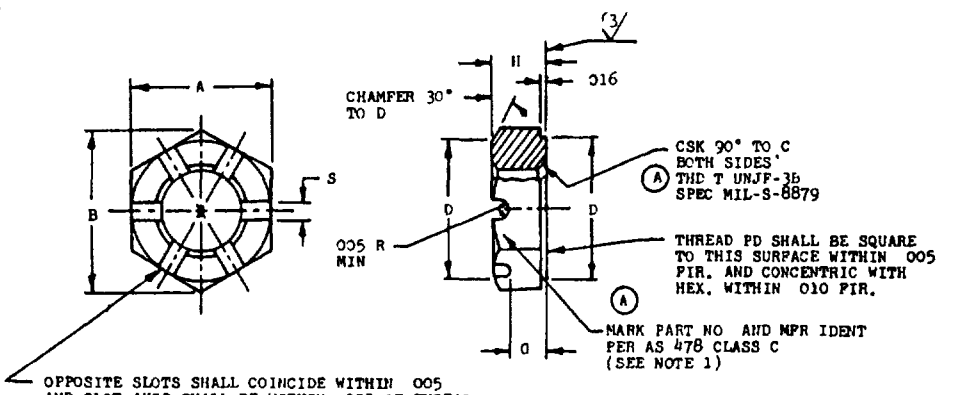

	PART NO.	THREAD T	A MIN	A MAX	B MIN	C DIA	D DIA	G	H	S MIN	S MAX	APPROX WEIGHT LB/100
(A)	MS9364-08	164-36	336	345	383	.174	344	078	156	073	.088	0 35
	MS9364-09	190-32	367	376	419	200	.375	094	188	073	088	0.37
	MS9364-10	.250-28	430	439	.491	260	438	094	.188	073	088	0 51
	MS9364-11	3125-24	492	502	.561	322	500	094	188	.073	088	0 64
	MS9364-12	375-24	553	564	631	385	562	109	219	.115	135	0 79
	MS9364-13	.4375-20	679	690	.775	448	688	109	219	.115	.135	1 59
	MS9364-14	500-20	741	752	846	510	750	141	250	115	135	1 95
	MS9364-15	.5625-18	.865	.877	.987	572	875	188	312	.146	166	3 49
	MS9364-16	.625-18	.928	940	1 059	.635	938	188	312	146	166	3.85
	MS9364-17	750-16	1 052	1 064	1 200	760	1 062	250	375	146	166	5 71
	MS9364-18	875-14	1 239	1 252	1 414	.885	1 250	.312	438	146	166	9.57
	MS9364-19	1 000-12	1 427	1 440	1.628	1 010	1 438	375	500	146	166	14 84

1. MULTIPLE MARKING OF BAR STOCK IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PARTS SHALL BE MARKED BEFORE THRFADING DASH NUMBERS MAY APPEAR ON ADJACENT FLATS.

(A) 2 MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735 [illegible] 73%.

3 SURFACE FINISH SILVER PLATE AMS 2410 0002 - 0006 THICK ON THREAD AT PD DIMENSIONS ARE AFTER PLATING.

4 SURFACE ROUGHNESS. USAS B46 1 - 1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEX FACES.

(A) 5 FLUORESCENT PENETRANT INSPECTION PER AMS 2645 BEFORE PLATING

6 BREAK SHARP EDGES 003 - 015 UNLESS OTHERWISE SPECIFIED

7. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°

8. DO NOT USE UNASSIGNED PART NUMBERS.

(A) CERTAIN PROVISIONS (LIMITS OF SIZE FOR ACROSS-FLATS DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
DEVELOPED COOPERATIVELY WITH THE [illegible] BY THE AEROSPACE PROPULSION DIVISION.

APPROVED 26 Jun 63 REVISED (A) 27 May 68

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: ARMY - AT

Review activities: USAF - 82, 85 ARMY - EL

P.A		TITLE	MILITARY STANDARD
USAF - 11 Other Cust Navy - AS Army - AV	INTERNATIONAL INTEREST	(A) NUT, SLOTTED HEXAGON - SHEAR, [illegible]286, SILVER PLATED, MIL-S-8879	MS9364
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S GOVERNMENT PRINTING OFFICE 1981 — 703-023/7893

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.