MIL-D-47225(MI)
12 July 1974
SUPERSEDING
MIS-15742
20 April 1967

MILITARY SPECIFICATION
DISCS, PLASTIC, POLYETHYLENE TEREPHTHALANE, PRESSURE SENSITIVE, ADHESIVE COATED

This specification is approved for use by all departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification describes the properties and requirements of a pressure sensitive adhesive coated, polyethylene terephthalate (mylar), plastic disc.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATION

Military

MIL-I-631	Insulation, Electrical, Synthetic-Resin Composition, Non-Rigid
MIL-P-14232	Parts, Equipment, and Tools for Army Material, Packaging and Packing of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

FSC 9330

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:02Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials

ASTM D 1000	Testing Pressure Sensitive Adhesive Coated Tapes for Electrical Insulation

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

Uniform Classification Committee

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60605)

National Motor Freight Traffic Associations, Inc.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., 1616 P Street N.W., Washington, D.C. 20036.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), a preproduction sample of plastic material shall meet the requirements of this specification.

3.2 Material. The material shall be a polyethylene terephthalate (mylar) disc, coated on both sides with a pressure sensitive adhesive and conforming to the dimensional requirements of Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:02Z
Check the source to verify that this is the current version before use.

3.3 Property values.

3.3.1 Film. The polyethylene terephthalate (mylar) film shall conform to MIL-L-631, Type G.

3.3.2 Adhesive. The adhesive shall be pressure sensitive, rubber base, heat resistant and non-corrosive (containing no sulfur). The adhesive shall exhibit a pull strength of at least 7.0 oz/in. width when tested in accordance with ASTM D 1000.

3.3.3 Discolor. The plastic discs shall be white in color and electrically non-conductive. As each disc is removed from the roll it shall remain flat and not curl-up and bond to itself.

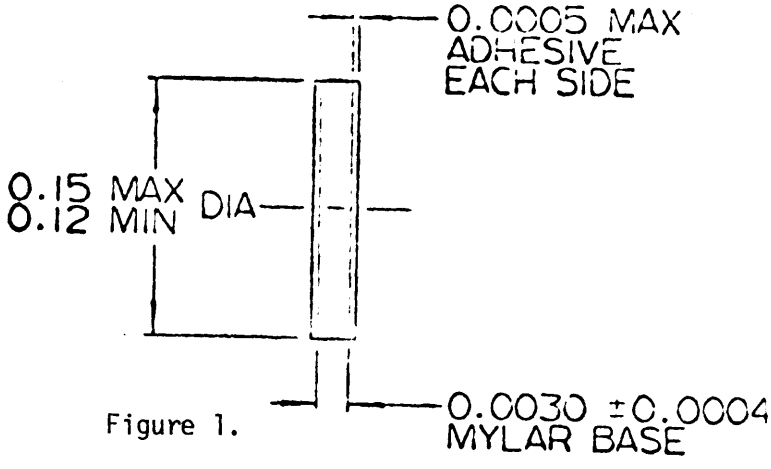


Figure 1.

3.3.4 Disc package. The plastic discs shall be supplied in rolls with a waxed paper (or equivalent) separator. Each package, or roll, shall contain 500 discs.

3.4 Workmanship. The workmanship shall be of the highest quality at all times, and each disc shall contain no foreign material which would limit its use or affect its appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample. The preproduction sample shall be prepared using the same methods for the preparation of subsequent lots of material. Preproduction samples which do not meet all the

Source: https://assist.dla.mil -- Downloaded: 202610-22T08:02Z
Check the source to verify that this is the current version before use.

requirements of this specification shall be subject to rejection.

4.3 Classification of inspection. The examination and testing of the material shall be classified as follows:

a. Preproduction inspection.

b. Quality conformance inspection.

4.3.1 Preproduction inspection. Preproduction inspection shall be conducted only on the preproduction sample and shall consist of all the examinations and tests specified herein.

4.3.2 Quality conformance inspection. Quality conformance inspection for acceptance of the material shall consist of the following examinations and tests.

a. Examination (see 4.4.1).

b. Adhesive strength (see 4.4.2).

4.3.2.1 Lot size. Lot size shall consist of all material manufactured at one time, from one process, forming part of one contract or order, and submitted for acceptance at one time and place.

4.3.2.2 Sampling. Unless otherwise specified (see 6.2), sampling shall be in accordance with MIL-STD-105.

4.4 Test methods.

4.4.1 Examination. The material shall be visually and mechanically inspected for conformance with 3.2, 3.3.3, 3.3.4 and 3.4.

4.4.2 Adhesive strength. The adhesive strength shall be tested in accordance with ASTM D 1000.

4.4.3 Electrical insulation. The electrical conductivity of the material shall be tested in accordance with ASTM D 1000.

4.5 Preservation, packaging, packing, and marking. The preservation, packaging, packing, and marking shall be examined to determine compliance with Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:02Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, Packaging, and Packing. Unless otherwise specified in contract or purchase order, preservation, packaging, and packing requirements for specified levls of protection shall be in accordance with MIL-P-14232, Uniform Freight Classification Rules, and National Motor Freight Rules.

5.2 Marking. Marking shall be in accordance with MIL-STD-129 and shall include but shall not necessarily be limited to the following:

a. This specification number.

b. Vendor's name.

c. Manufacturer's material designation.

d. Date of manufacture.

e. Quantity.

f. Contract or procurement document number.

6. NOTES

6.1 Intended use. The discs shall be used to hold electronic flat packs in place during welding to printed wiring boards.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Whether a preproduction sample is required, and if so, pertinent details (see 3.1).

c. Sampling plan, if other than specified (see 4.3.2.2).

d. Requirements for preservation, packaging, packing, and marking, if different (see 5.1).

6.3 Supersession data. This specification includes the requirements of Missile Interim Specification, MIS-15742, dated 20 April 1957.

Custodian
Army-MI

Preparing Activity:
Army-MI
Project No. 9330-A651

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-22T08:02Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DOD-314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T08:02Z
Check the source to verify that this is the current version before use.