
REVIEWER SYMBOLS:
ARMY-ER,AV,MI
NAVY-SH,EC
USAF-11

USER SYMBOLS:


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all re- engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5940

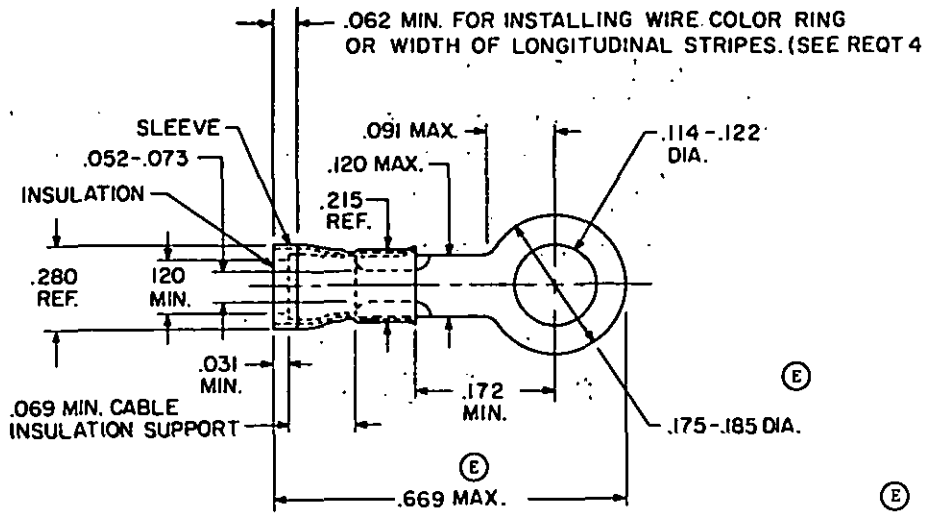

TONGUE MATERIAL THK. = .027-.035
WIRE SIZE 22-18
MS 17182-1

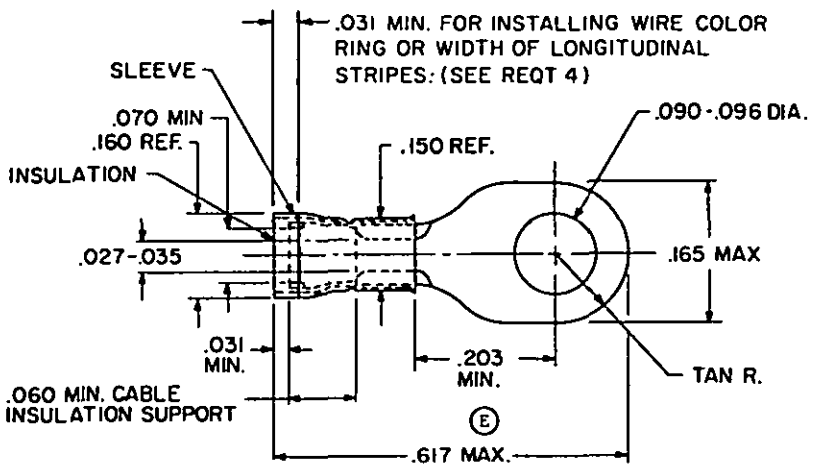

TONGUE MATERIAL THK = .018-.025
WIRE SIZE 26-24
MS 17182-2

INCHES	mm
.018	0.46
.025	0.64
.027	0.69
.031	0.79
.035	0.89
.052	1.32
.060	1.52
.062	1.57
.069	1.75
.070	1.78
.073	1.85
.090	2.29
.091	2.31
.096	2.44
.114	2.90
.120	3.05
.122	3.10
.150	3.81
.160	4.06
.165	4.19
.172	4.37
.175	4.45
.185	4.70
.203	5.16
.215	5.46
.280	7.11
.617	15.67
.669	16.99

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST OF PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

E REVISED

APPROVED 20 SEPT 1960 REVISED (E) 3 JUNE 1971

P.A. NAVY - AS Other Cust ARMY - AR AIR FORCE - 85	TITLE TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED (SERVO-COMPONENTS) TYPE II, CLASS 1, FOR 125°C TOTAL CONDUCTOR TEMPERATURE	MILITARY STANDARD MS17182
ACQUISITION SPECIFICATION	SUPERSEDES BUORD DWG 2081851 AND 12-Z-7001-2813 MS17182(WP)	SHEET 1 OF 2

DD FORM (MAR 72) 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 21065

PROJECT NO. 5940-0891

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:

REVIEWER SYMBOLS:
ARMY-ER,AV,MI
NAVY-SH,EC
USAF-11

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

FED. SUP CLASS
5940

REQUIREMENT:

1. MATERIAL: LUG-COPPER,ANNEALED.

2. INSULATION MATERIAL: THERMO-PLASTIC. (COLOR.SEE REQT 4)

3. FINISH: TIN PLATE PER MIL-T-10727.

4. INSULATION COLOR: MS17182-1 (RED WITH GREEN STRIPES). MS17182-1 (YELLOW WITH BROWN STRIPES). INSTALLING WIRE COLOR RING MAY BE THREE LONGITUDINAL STRIPES EQUALLY SPACED ON THE INSULATION PORTION OF THE TERMINALS.
   a. BASE COLOR OF INSULATION IDENTIFIES PROPER CRIMP SIZE WITH APPROPRIATE TOOL.
   (E) b. GREEN OR BROWN STRIPE COLOR IDENTIFIES PROPER COLOR OF INSULATION OF INSTALLING WIRE. INSTALLING WIRE COLOR RING SHALL BE IN ACCORDANCE WITH EIA STANDARD RS-359. THERE SHALL BE A DISTINCT CONTRAST BETWEEN THE INSULATION SLEEVE COLOR AND THE INSTALLING WIRE COLOR RING OR STRIPE.

5. WIRE INSERTION SHALL BE FACILITATED BY BELL MOUTH.

6. TOOL:

   FOR MS17182-1 USE MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 DIES INSTALLED OR USE MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED.

   (E) FOR MS17182-2 USE MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-101 DIES INSTALLED OR USE MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-102 DIES INSTALLED.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. REMOVE BURRS AND BREAK SHARP EDGES.
3. METRIC EQUIVALENTS(TO THE NEAREST .01) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.

APPROVED 20 SEPT 1960 REVISED .E FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY - AS Other Cust ARMY - AR AIR FORCE - 85	TITLE TERMINAL, LUG,CRIMP STYLE, COPPER,INSULATED (SERVO-COMPONENTS) TYPE II, CLASS 1, FOR 125°C TOTAL CONDUCTOR TEMPERATURE	MILITARY STANDARD MS17182
ACQUISITION SPECIFICATION	SUPERSEDES BUORD DWG 20R1A51 AND 12-Z-7001-2R13 MS17182(WP)	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 21045

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:04Z
Check the source to verify that this is the current version before use.