

MILITARY SPECIFICATION SHEET

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED
VOLTMETER AND AMMETER, DC, LONG SCALE
(FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 24

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the meters described herein shall consist of this document and the latest issue of Specification MIL-M-10304.

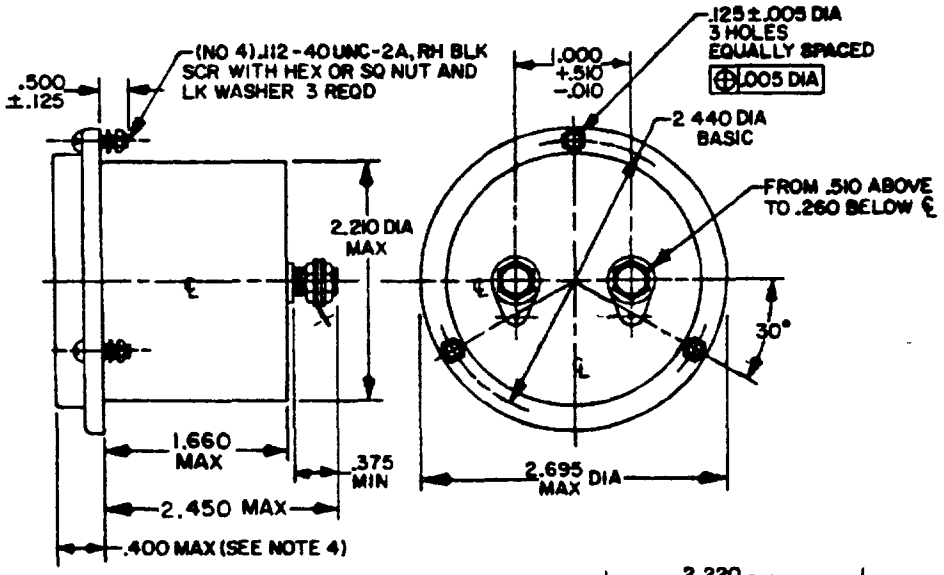

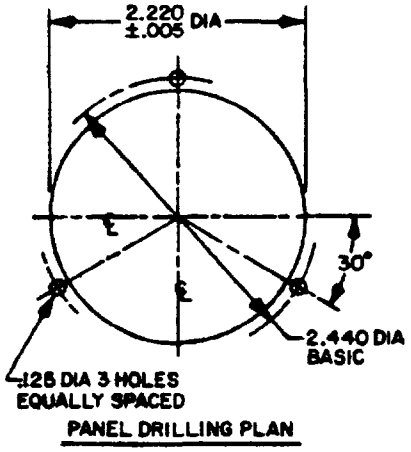

PANEL DRILLING PLAN

INCHES	MM	INCHES	MM	INCHES	MM
005	13	400	10 16	2.210	56 13
.010	25	500	12.70	2.220	56.39
.112	2.84	510	12 95	2.440	61.98
125	3.18	1.000	25.40	2.450	62.23
.260	6.60	1.660	42.16	2.695	68 45
.375	9.52				

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm
3 Tolerance is ±1/2° on angles
4 Maximum projection from front of panel including mounting gaskets (if used)

FIGURE 1. Meter, panel type.

FSC 6625

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:
(Readings expressed as a percent of full-scale value.)

Dimensions and configuration: See figure 1.

Weight: 25 ounces, maximum.

Full-scale ranges: See table I.

Scale:
Length: 4 inches minimum.
Pointer deflection: 250° minimum.

Position influence: ±1 percent change for 60° rotation from normal operating position.

Accuracy: ±1 percent.

Damping factor: 2 minimum.

Overshoot: 50 percent.

Response time: 3 seconds maximum.

Power consumption (loss) (at end scale deflection):
Milliammeters 0-1 mA - 700 mV maximum.
Milliammeters above 1 mA - 150 mV maximum.
Voltmeter - 1 mA, nominal.

High temperature cycling:
±4.0 percent,
±0.5 percent permanent change.

Temperature influence: ±1 percent change.

Exposure to extreme temperatures: ±3 percent permanent change.

Overload capacity:
Momentary overload: ±2 percent permanent change.
Sustained overload:
±1 percent temporary zero shift.
±1 percent permanent zero shift.
±2 percent permanent change.

Dielectric withstanding voltage: 3,000 volts rms.

TABLE I. Full-scale ranges.

Voltmeters		Ammeters			
Volts		Microamperes		Milliamperes	
Zero left	Zero center	Zero left	Zero center	Zero left	Zero center
1	1-0-1	50	50-0-50	1	1-0-1
2	10-0-10	100	100-0-100	5	5-0-5
10	30-0-30	200	200-0-200	10	10-0-10
20	50-0-50	500	500-0-500	30	
30	100-0-100			50	
50	200-0-200				
100					
200					
300					
500					

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 99

Review activities:
Army - AV, AT, ME, WC
Navy - MC
Air Force - 11
DLA - ES

User activities:
Army - MI
Navy - CG

Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 6625-0579-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors government activities or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE MIL-M-10304/37 METERS,ELECTRICAL INDICATING,PANEL TYPE, RUGGEDIZED: VOLTMETER AND AMMETER, DC,LONG SCALE (FLUSH MOUNTING,

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes" in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:55Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:55Z
Check the source to verify that this is the current version before use.