NOT MEASUREMENT SENSITIVE

MIL-DTL-15665/39
29 December 1995

DETAIL SPECIFICATION SHEET

INSIGNIA, HAT, HONOR GUARD AND BASE HONOR GUARD, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-15665 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

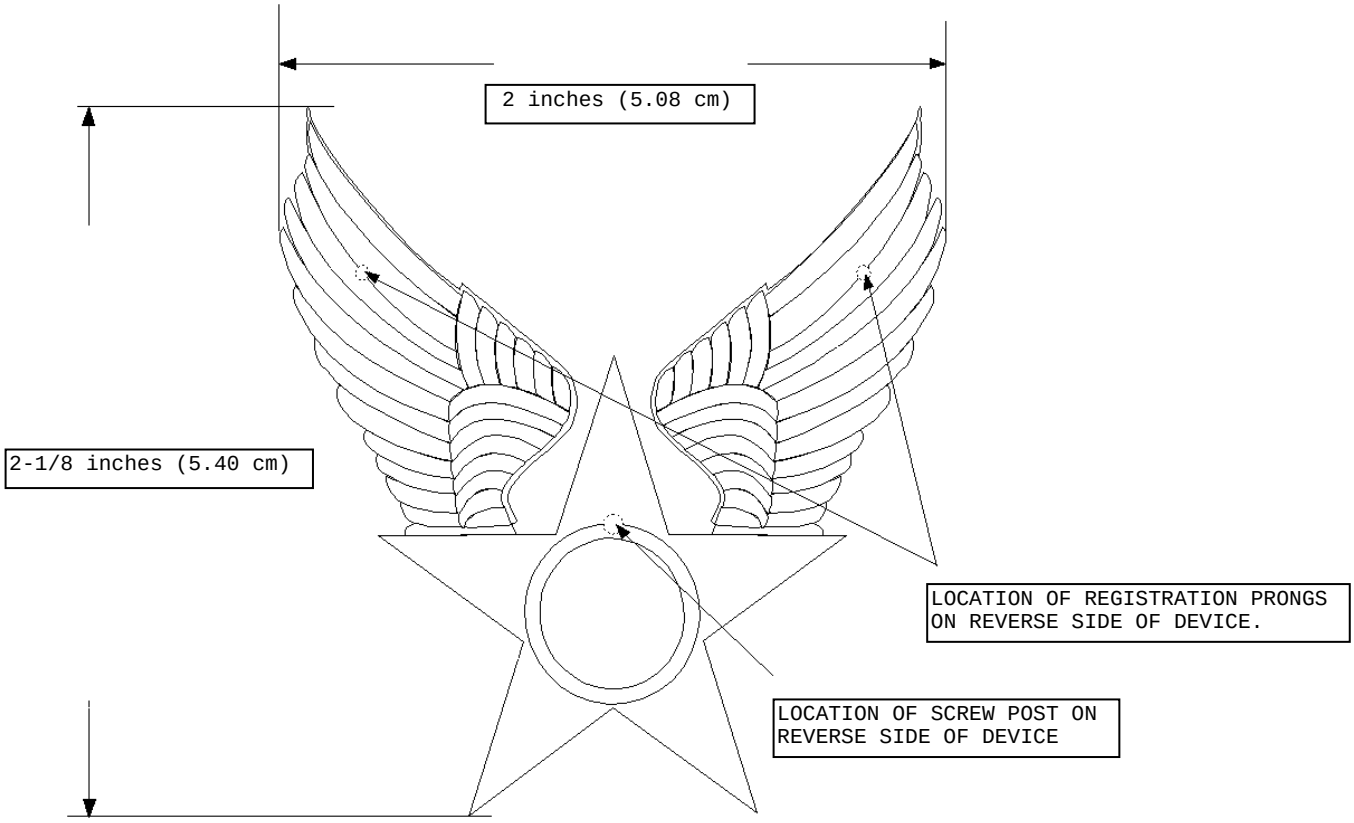

MATERIAL: Red Brass or Nickel Silver

FINISH: Nickel Plated (Red Brass Only), Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:43Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall): 2-1/8 inches (2.86 cm) (REF)
WIDTH (Overall): 2 inches (5.08 cm) (REF)
THICKNESS (Center of Star): 0.085 inch ± 0.010 inch (0.216 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be screw post with thumb nut and two registration prongs. The screw post shall be located on the vertical center line of the star 1/2 inch ± 1/32 inch (1.27 cm ± 0.08 cm) below the tip of the star. The registration prongs shall be located 1/2 inch (1.27 cm) below the tip of each wing and centered.

3. The screw post shall be 9/16 inch ± 1/32 inch (1.43 cm ± 0.08 cm) in length, 1/8 inch (0.32 cm) in diameter and shall have a No. 5-40 UNC-2A thread.

4. The thumb nut shall be 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) in diameter with a No. 5-40 UNC-2B thread.

5. The registration prongs shall be formed from brass or nickel silver and shall be 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and 0.32 inch ± 0.002 inch (0.81 cm ± 0.005 cm) in diameter.

6. The insignia shall be dapped in the horizontal direction along a 4 inch ± 1/64 inch (10.16 cm ± 0.04 cm) radius.

7. The reverse side and edges of the hat insignia shall be clean.

Custodians:
Army - IH
Air Force - 45

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
DLA - CT

(Project No. 8455-0824)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:43Z
Check the source to verify that this is the current version before use.