

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

AN PART NUMBER

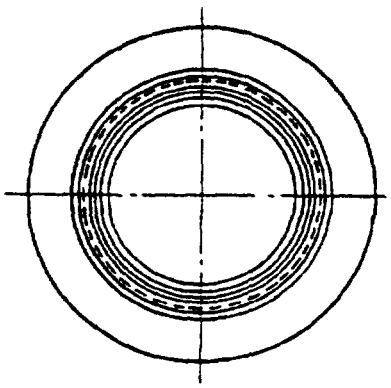

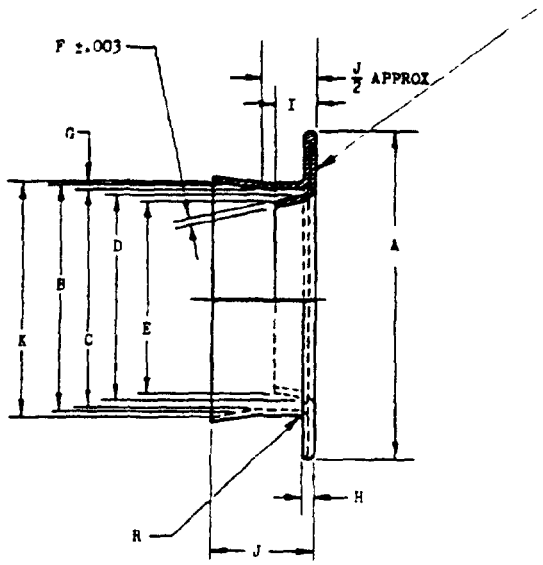

AN PART NO.	CONDUIT SIZE	A DIA	B DIA	C DIA	D DIA	E DIA	F	G	(a) H	I	J	K +.015 −.000 DIA	R MAX RAD
AN3052-4	1/4	.807	.447	.407	.250	3/16	.017	.020	.040	7/64	7/16	.460	.030
AN3052-6	3/8	.932	.572	.532	.375	5/16	.017	.020	.040	1/8	7/16	565	.030
AN3052-8	1/2	1.105	.697	.657	.500	7/16	.017	.020	.040	5/32	7/16	.710	.030
AN3052-10	5/8	1.355	.822	.782	.625	9/16	.017	.020	.040	5/32	7/16	.835	.030
AN3052-12	3/4	1.668	.982	.942	.750	11/16	.017	.020	.040	5/32	1/2	1.001	.030
AN3052-16	1	1.918	1.267	1.227	1.000	15/16	.017	.020	.060	5/16	5/8	1.300	.030
AN3052-20	1-1/4	2.160	1.522	1.482	1.250	1-3/16	017	.020	.060	5/16	5/8	1.555	.030
AN3052-24	1-1/2	2.410	1.777	1.737	1.500	1-7/16	.017	.020	060	5/16	3/4	1.823	.030
AN3052-28	1-3/4	2.910	2.029	1.989	1.750	1-11/16	.017	.020	.060	5/16	7/8	2.088	.030

(a) DIMENSION H FOR SIZES -16 TO -28, INCLUSIVE, OF STAMPED FERRULES TO BE OBTAINED BY A SUITABLE WASHER OF THE SAME MATERIAL AND THICKNESS AS THE FERRULE MATERIAL, THIS WASHER SHALL BE ATTACHED TO THE FERRULE.

(5) MATERIAL. ALUMINUM, SPECIFICATION QQ-A-561, TEMPER O OR SPECIFICATION QQ-A-359, TEMPER O

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005

APPROVED 21 Mar 49 REVISED (1) 6 Feb 51 (2) 11 Aug 47 (3) 28 Nov 49 (4) 19 May 52 (5) 9 Nov 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3052
NONE	FERRULE - CONDUIT, FLEXIBLE, TWO STEP	

Source: https://assist.dla.mil -- Downloaded: 20261O-26T14:18Z
Check the source to verify that this is the current version before use.